

KTLD-4LT5HE-UV-8C-VDIM

CONSTANT CURRENT LED DRIVER FOR TYPE C T5HE LAMPS

DESCRIPTION

Constant Current Output | 120–277V Input | 0–10V Dimming



DRIVER TYPE: Constant Current

OUTPUT CURRENT: 0.185A × 4 Channels

INPUT POWER: 36W

MAX. CURRENT 0.34A@120V, 0.16A@277V

MAX. OUTPUT POWER: 32W

WARRANTY: 5 Years

PRODUCT FEATURES


- Compatible with Keystone external drive T5HE LED lamps
- Meets FCC Part 15 (Class B) consumer limits
- Short circuit overload and open load protection
- Type 1 outdoor, suitable for dry and damp locations
- UL8750 Recognized component
- Dimmable with 0–10V Dimmer, dim minimum 10%
- Operating temperature: –20°C/–4°F to 45°C/113°F
- 85°C/185°F maximum case temperature
- Input frequency: 50/60 Hz
- THD: <20%

ELECTRICAL SPECIFICATIONS

INPUT CHARACTERISTICS				OUTPUT CHARACTERISTICS			FEATURES
Input Voltage	Input Power	Power Factor	Max. Current	Max. Output Power	Max. Current	Output Voltage	Efficiency
120–277Vac	36W	>0.9	0.34A@120V 0.16A@277V	32W	0.185A × 4 Channels	36–45Vdc	89%

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS

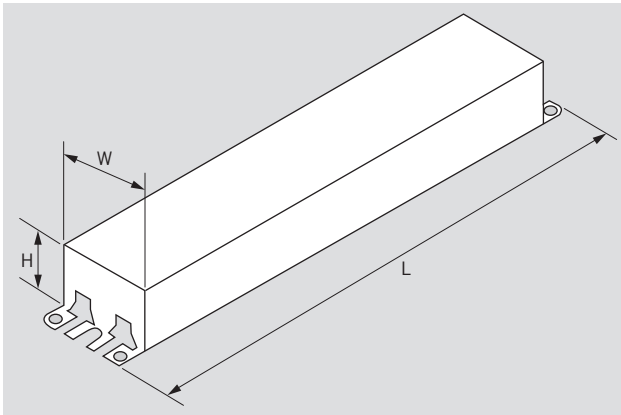

LENGTH (L)	9.69"
WIDTH (W)	1.61"
HEIGHT (H)	1.24"

*TC Point (85°C) is noted on each driver label




KTLD-4LT5HE-UV-8C-VDIM

CONSTANT CURRENT LED DRIVER FOR TYPE C T5HE LAMPS


WIRING

DOUBLE-ENDED WIRING

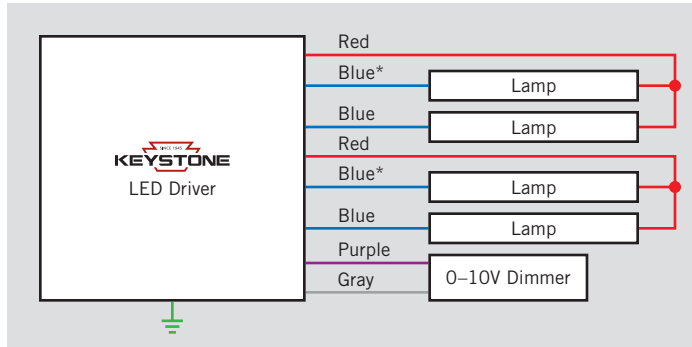

* For 3 lamp application, cap off 1 blue lead

SINGLE-ENDED WIRING

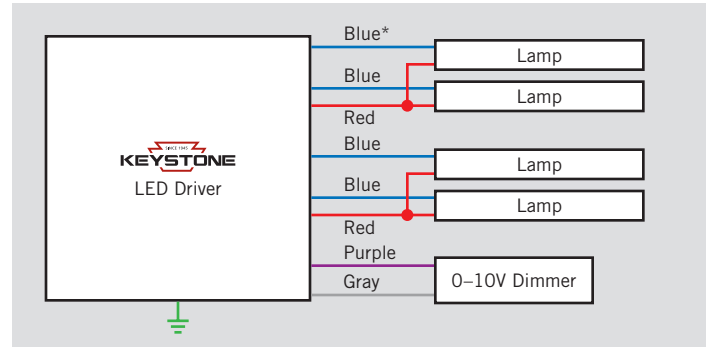

* For 3 lamp application, cap off 1 blue lead

STANDARD LEAD LENGTHS*

Input	Black	30.00"
	White	30.00"
Output	Red	30.00"
	Blue	30.00"
Dimming	Purple	30.00"
	Gray	30.00"

Lead wires are 18 AWG 105° C/600V.

*Consult Keystone for special lead length requirements.

ORDERING INFORMATION

Order Code	Pack Quantity	Easy Code	UPC
KTLD-4LT5HE-UV-8C-VDIM	25	BWI-19	843654133140

CATALOG NUMBER BREAKDOWN

KTLD-4LT5HE-UV-8C-VDIM

1 2 3 4 5 6 7

- 1 Keystone Technologies LED Driver
- 2 Number of Lamps
- 3 Lamp Type
- 4 High Efficiency
- 5 120-277V Input
- 6 Lamp Wattage
- 7 0-10V Dimming
- 8 Packaging Style