



Type IC

Wet & Air-Tight

DESCRIPTION

4" Sloped Round Regressed Gimbal LED
With Integral Driver In Connection Box
Gimbal Yet Air-Tight Without Housing Needed
30° Sloped Trim for Wall Washing and
Sloped Ceilings from 5° to 55°


FEATURES & BENEFITS

3" Deep - Install Where Ceiling Space Is Limited
Type IC Rated - No Housing Required
Driver Inside Connection Box - No Junction Box Needed
CRI 90+ for True Color Rendering


MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With
Attached Spring Clips. Ceiling Clearance Required: 3"

DIMENSIONS: ID 4 1/2" OD 5 3/4" Cut Out 4 1/2" to 5" Round Hole

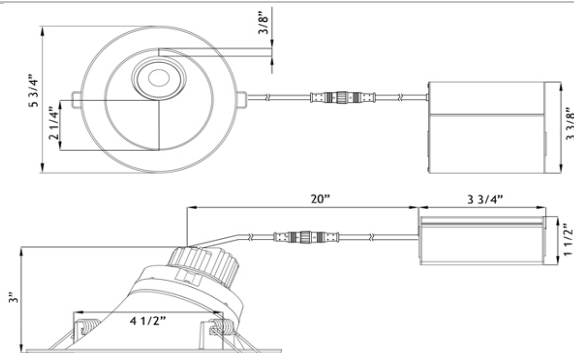

AVAILABLE TRIMS

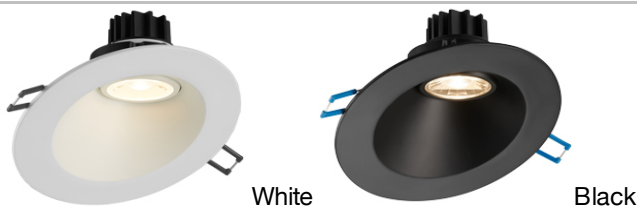

ORDERING GUIDE Example: LRG3 - 30K - 4RSL - WH

	CCT	Trim Finish
LRG3	- xxK	- 4RSL - xx
2700K	27K	- 4RSL - WH White
3000K	30K	- 4RSL - BK Black
3500K	35K	
4000K	40K	
5000K	50K	
DTW 3K-2K	32K	Dim to Warm 3000K to 2000K

LRG3-4RSL

4" Sloped Round Regressed Gimbal LED 7.5W

Project:

Location:

Cat #:

Qty:

Notes:

SPECIFICATION	
Applications	Sloped Ceilings 5° to 55°, Wall Washing
Energy Used	7.5 W
Color Temperature	2700 3000 3500 4000 5000 DTW 32
Light Output	580 600 620 630 650 500
Halogen Equivalent	50 W
Beam Angle	38° beam with 25° tilt and 360° rotation
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.95
Approved Location	Insulated Ceiling & Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW), T24
Warranty	10 Year Residential / 5 Year Commercial

120V TRIAC Dimmable

Optional 120V-347V

Driver Included

Driver 0-10V Dimmable

Order Separately as
Cat # **LLL-LD0716T**



ACCESSORIES

Sold Separately



Low Voltage Extension Cables
6ft - cat # **EXC6**, 20ft - cat # **EXC20**
Max 40 ft Allowed. FT4 / CMR rated



Flat Rough-In Plate - cat # **RIP5**



Flanged Plate with Hanger Bars
- cat # **FRP5**

COMPLIANCE



Type IC
Air-Tight

USA Patent # US 10,344,952 B2 | Canada Patent # 2,967,954

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Dallas TX, Vancouver WA

www.LotusLEDLights.com

Lotus LED Lights CANADA

800-15355 24 Ave Box 200, Surrey BC V4A 2H9 tel 604-538-3090
Delta BC & Mississauga ON