



Lotus
LED
Lights



Type IC, Air-Tight, Wet & Plenum

DESCRIPTION

4" Square Recessed LED With Built-In Driver
Commercial Grade Quality With Architectural Design


FEATURES & BENEFITS

2" Deep - Install Where Ceiling Space Is Limited
Type IC Rated - No Housing Required
CRI 90+ for True Color Rendering
Fast & Easy To Install - Save On Labor
Connection Box Included - No Junction Box Needed
Armored Cable - Open Plenum Rated

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With
Attached Spring Clips. Ceiling Clearance Required: 2"

DIMENSIONS: ID 4" OD 5" Cut Out 4" to 4 1/4"

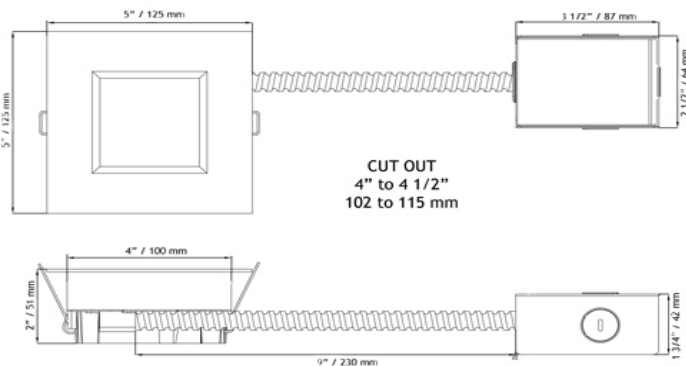

ORDERING GUIDE Example: LL4SRG - 30K - WH

	CCT	Trim Finish	
LL4SRG	-	-	
2700K	27K	WH	White
3000K	30K	BK	Black
4100K	41K		

Lotus LED Lights USA

250 H Street # 301, Baine WA 98230 tel 360-200-5500

Warehouses: Hainesport NJ, Naples FL, Dallas TX, Las Vegas NV, Lynnwood WA

www.LotusLEDLights.com

LL4SRG

4" Square Regressed 1st Gen Plenum LED 14.5W

Project:

Location:

Cat #:

Qty:

Notes:

SPECIFICATION			
Applications	Recessed Ceiling Mount		
Energy Used	14.5 W		
Color Temperature	2700	3000	4100
Light Output	850	860	900
Halogen Equivalent	75 W		
Beam Angle	90°		
CRI	90 +		
Input Voltage	120V AC 50/60 Hz		
Dimming	TRIAC Dimmers 5%-100%		
Power Factor	0.95		
Approved Location	Insulated Ceilings, Open Plenum, Wet		
IP Rating	IP 54		
Air Tight	Yes		
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)		
Projected Life	70% Light Output at 50,000 Hours		
Certification	cULus		
Warranty	10 Year on Residential 5 Year on Commercial Applications		

AVAILABLE TRIMS



White



Black

ACCESSORIES

Sold Separately



Flat Rough-In Plates - cat # **RIP4**



Flanged Rough-In Plate - cat # **FRP4**

COMPLIANCE



Type IC
Air-Tight
Open Plenum

Lotus LED Lights CANADA

800-15355 24 Ave Box 200, Surrey BC V4A 2H9 tel 604-538-3090

Delta BC & Mississauga ON