

Type IC, Wet & Air-Tight

DESCRIPTION

4" Square Slim Recessed LED With
Integral Driver In Connection Box


FEATURES & BENEFITS

1 3/8" Deep - Install Where Ceiling Space Is Limited
Driver Inside Connection Box - No Junction Box Needed
Fast & Easy To Install - Save On Labor
Type IC Rated - No Housing Required

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached
Spring Clips. Ceiling Clearance Required For Driver: 2"

DIMENSIONS: ID 4 1/8" OD 4 3/4" Cut Out 4 1/8" to 4 1/4"

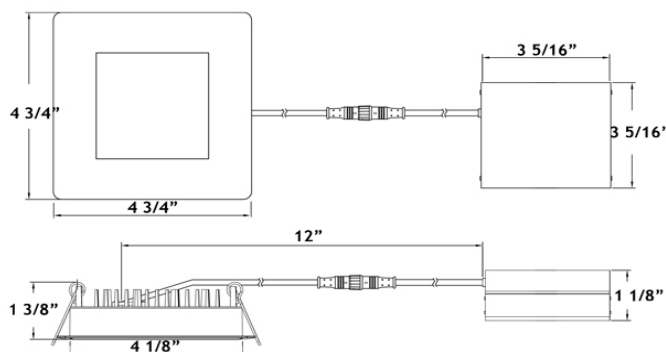

120V TRIAC Dimmable

Driver Included


Optional 120V - 347V

Driver 0-10V Dimmable



Order Separately as
Cat # LLL-LD1535T

AVAILABLE TRIMS



ORDERING GUIDE Example: **LY4S / 30K / WH**

	CCT	Trim Finish	
LY4S	/	/	
3000K	30K	WH	White
4100K	41K	BK	Black
		BN	Brushed Nickel

4" Square Slim Recessed LED 11W

Project:

Location:

Cat #:

Qty:

Notes:

SPECIFICATION

Applications	Recessed Ceiling	
Energy Used	11 W	
Colour Temperature	3000	4100
Light Output	700	800
Halogen Equivalent	65 W	
Beam Angle	110°	
CRI	80	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Power Factor	0.95	
Approved Location	Insulated Ceiling & Wet Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 50,000 Hours	
Certification	cULus, Energy Star	
Warranty	10 Year on Residential	
	5 Year on Commercial Applications	

ACCESSORIES

Sold Separately



Low Voltage Extension Cables
6ft - cat #**EXC6**, 20ft - cat #**EXC20**
Max 40 ft Allowed. FT4 / CMR rated



Flat Rough-In Plates - cat #**RIP4**



Flanged Rough-In Plate - cat #**FRP4**

COMPLIANCE



**Type IC
Air-Tight**