


MAESTRO®
The High-Tech Multi-Location
Smart Dimmer

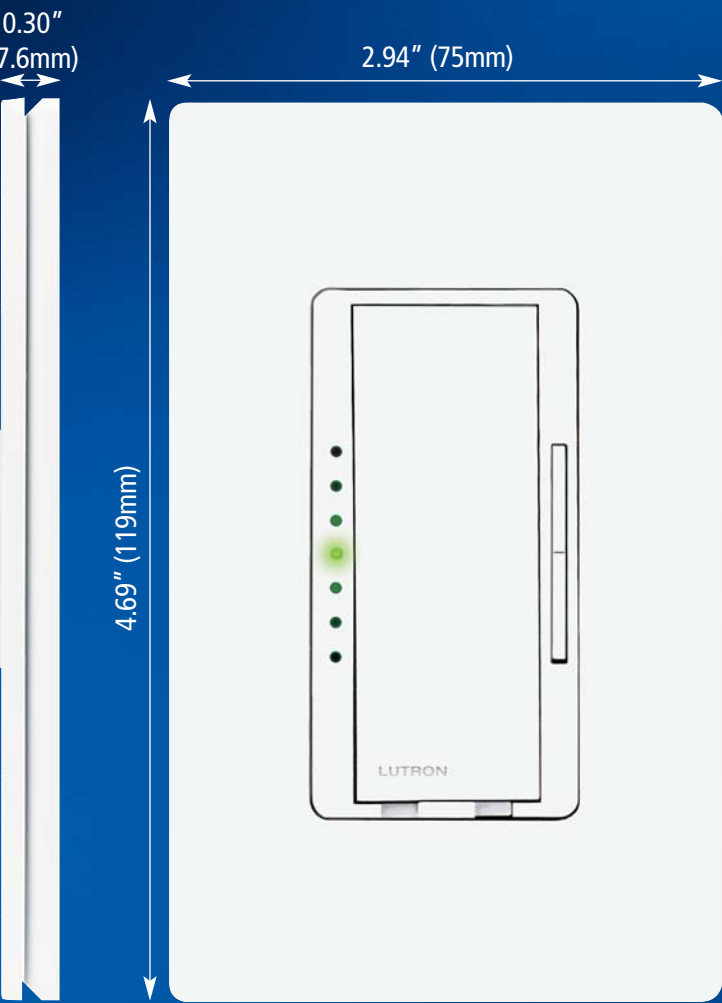

Shown actual size: Maestro preset Smart Dimmer in white (WH). Claro® wallplate, pg.XX, is included with Maestro Duo™ packages and sold separately for other products.

Product Family Features


- High-tech “Smart Dimmer” with microprocessor technology for a standard designer wallplate opening
- Special Features!
 - Two taps on the switch brings lights on to full brightness
 - Press and hold the switch to set the delay before the lights go off
- LEDs indicate light level and glow softly as a locator light in the dark
- Multi-location dimming from up to 10 locations
- Uses standard single-pole and 3-way wiring for easy installation

Specification Features


(See Performance Specifications, pg.XX)

- Power-failure memory
- Line frequency compensation
- Electrostatic discharge protection
- Captive tapswitch and rocker
- Front accessible service switch (FASS™) to disconnect load power
- Includes radio frequency interference suppression circuitry
- Precise color consistency
- UV stable color


Color Palette (For latest color information, visit www.lutron.com)

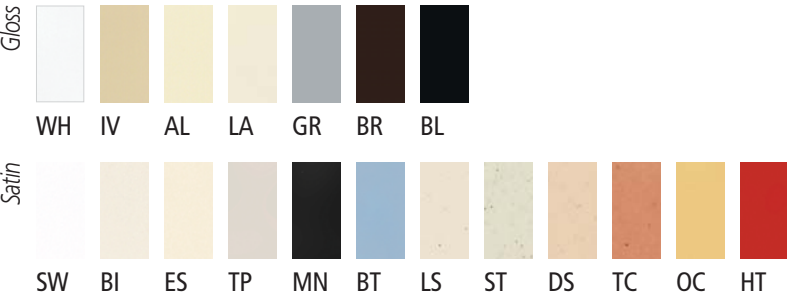


Smart Dimmers

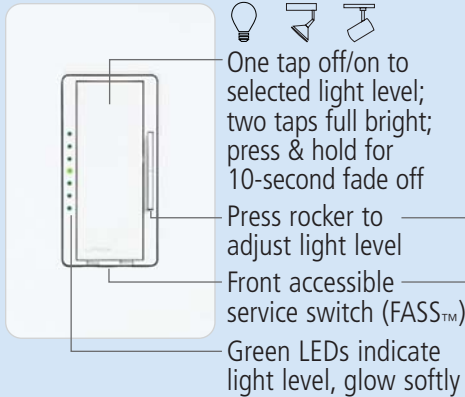


Accessory Dimmers

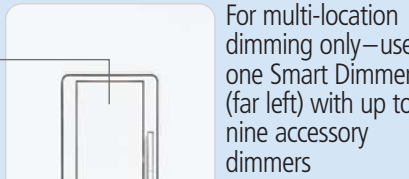


Electronic Switches

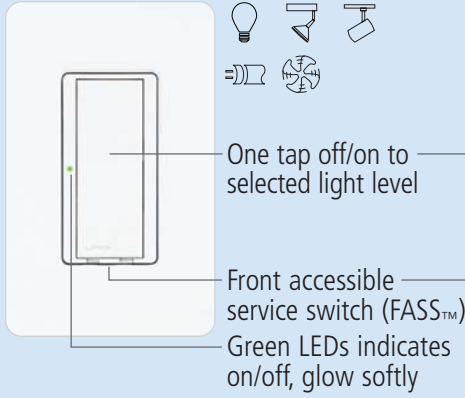


Accessory Switches

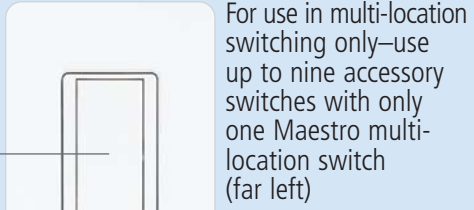

Single-Location Dimming and Switching

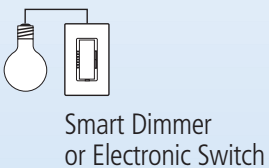

Multi-Location Dimming and Switching

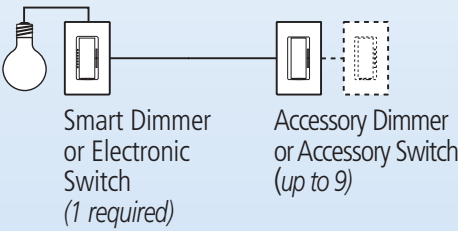


Key to Models Available

	Incandescent
	Electronic Low Voltage
	Magnetic Low Voltage
	Fluorescent
	General Purpose Fan


Designer Accessories and Wallplates, pg.XX



Related Products

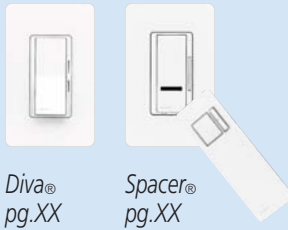

Installation Considerations

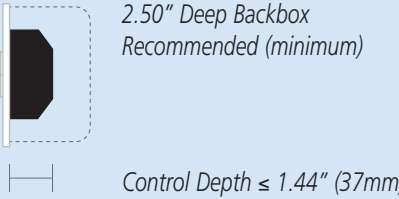

Dimmers and Fan Controls

Description		Maximum Capacity*	Model #	Important Information	
  		Maestro Duo™ Packages WALLPLATES INCLUDED		Ships in 48 hrs. Color Palette <i>Gloss Finish</i> Add color suffix to model # Example: MAW-600H-WH WH White IV Ivory AL Almond LA Light Almond GR Gray BR Brown BL Black Colors meet NEMA color standards where standards exist  Accessories Coordinating designer accessories, sold separately, pg.XX. *Maximum Capacities For capacities in multigang installations, see ganging and derating information, pg.XX. Single-Gang Wallplate Dimensions W: 2.94" (75mm) H: 4.69" (119mm) D: 0.30" (7.6mm) Controls are 120V 60Hz unless noted. Global Ordering see pg.XX For More Information: www.lutron.com/maestro Fax-on-Demand 1-800-523-9466	
		Incandescent			
	Maestro Duo Single-Pole Dimming Packages Package Includes: 600W MAW-600H- (1) Single-Pole Preset Smart Dimmer (1) Claro® Single-Gang Wallplate <i>Package Above:</i> Minimum load on dimmer is 40W.				
Maestro Duo Multi-Location Dimming Packages Package Includes: 600W MAW-603-RH- (1) Multi-Location Preset Smart Dimmer (1) Accessory Dimmer (2) Claro Single-Gang Wallplates <i>Package Above:</i> To dim from additional locations, use Maestro accessory dimmers, MA-R-, pg.XX. Not for use with mechanical 3-way or 4-way switches. Maestro accessory dimmer does not have to be derated when ganged; to multigang Smart Dimmers see derating information, pg.XX. Minimum load on dimmer is 40W.					

Description		Maximum Capacity*	Model #	Important Information	
	Smart Dimmers			Ships in 48 hrs.	
	Incandescent			Color Palette <i>Gloss Finish</i> Add color suffix to model # Example: MA-600-WH	
Preset Smart Dimmers				WH White	
Single Pole/			MA-600-	IV Ivory	
Multi-Location	600W		MSC-600M-	AL Almond	
Single Pole/			MA-1000-	LA Light Almond	
Multi-Location	1000W		MSC-1000M-	GR Gray	
<i>Products Above:</i> For multi-location dimming, use one Maestro Smart Dimmer with up to nine Maestro accessory dimmers, MA-R-, pg.XX. Not for use with mechanical 3-way or 4-way switches. Minimum load on dimmer is 40W. Derating required if ganged, pg.XX.				BR Brown	
				BL Black	
				<i>Colors meet NEMA color standards where standards exist</i>	
Electronic Low Voltage				Satin Finish Add color suffix to model # Example: MSC-600M-SW	
Preset Smart Dimmers				SW Snow	
Single Pole/			MAELV-600-	BI Biscuit	
Multi-Location	600W		MSCELV-600M-	ES Eggshell	
<i>Products Above:</i> For multi-location dimming, use one Maestro Smart Dimmer with up to nine Maestro accessory dimmers, MA-R-, pg.XX. Requires neutral wire connection. Not for use with mechanical 3-way or 4-way switches. Minimum load on dimmer is 5W. Derating required if ganged, pg.XX.				TP Taupe	
				MN Midnight	
				BT Blue Mist	
				LS Limestone	
				ST Stone	
				DS Desert Stone	
				TC Terracotta	
				OC Ochre	
				HT Hot	
				Accessories and Wallplates	
				Coordinating designer accessories and wallplates sold separately, pg.XX.	
				*Maximum Capacities For capacities in multigang installations, see ganging and derating information, pg.XX.	
				Controls are 120V 60Hz unless noted.	
				UL SP NOM Global Ordering see pg.XX	
				For More Information: www.lutron.com/maestro Fax-on-Demand 1-800-523-9466	