

Accessories

Wallplates



Shown actual size:
2-gang Claro® wallplate
in White (WH).

For more information
about Designer wallplates,
see p. 236.

Coordinated electrical devices



Tamper resistant, self-
testing GFCI receptacle




Customizable
6-port frame



Cable jack

For more information
about coordinated
Designer electrical
devices, see p. 237.

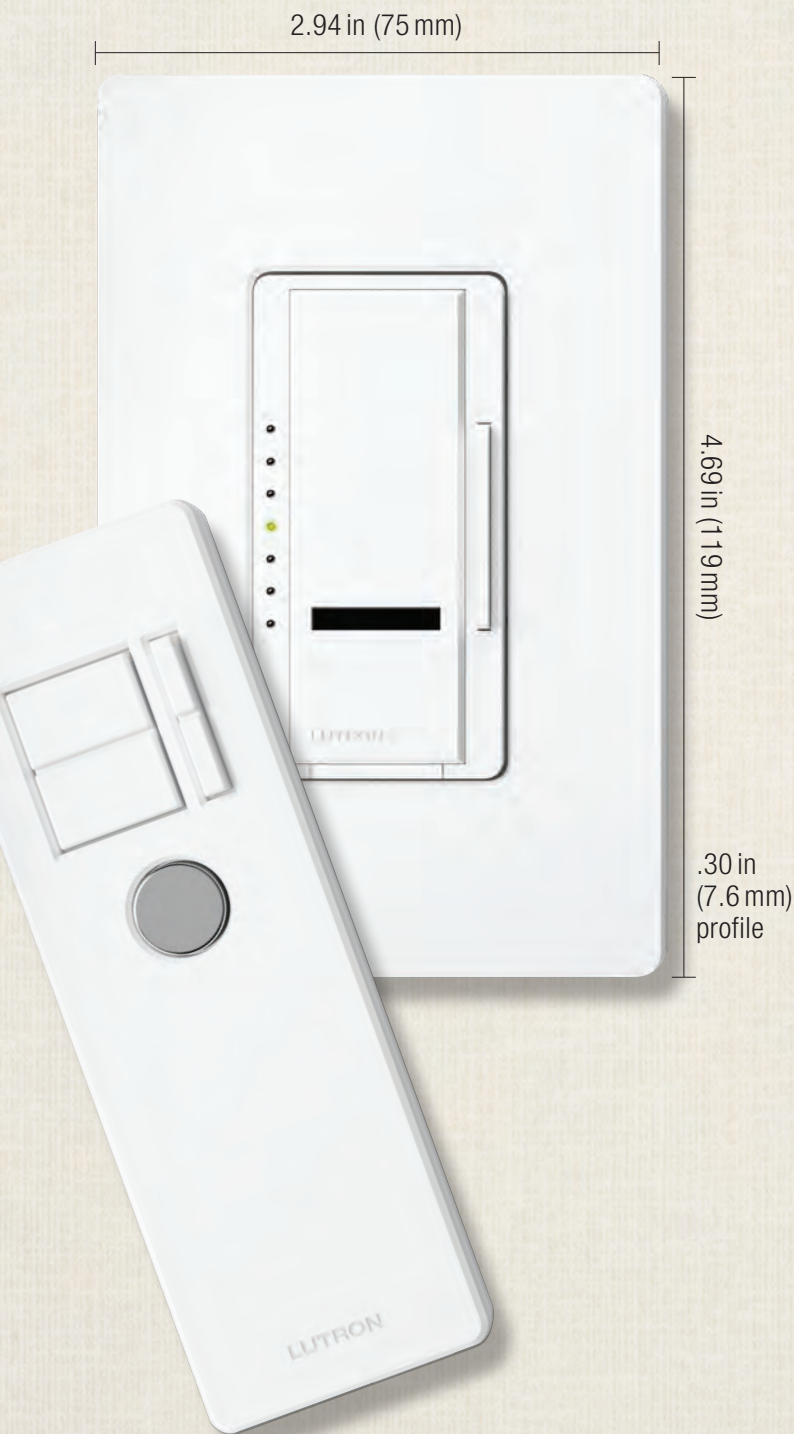

Product family features

- True multi-location dimming from every location
- Use the infrared (IR) remote control to adjust lights from anywhere in the room—up to 30 ft line-of-sight
- Tap on to preset level; tap off; tap twice for full on
- Touch rocker to adjust light level
- LEDs indicate light level and glow softly in the dark as a locator light
- Delayed off provides light as you exit the room
- Programming allows customized functions
- Coordinating Claro®, Satin Colors®, and Stainless Steel wallplates only available separately
- Custom engraving available for wallplates; see p. 237

Control types

 Single-pole (one location)

 Multi-location dimming (up to 10 locations)

Direct load type compatibility

-  Incandescent/halogen lighting
-  Magnetic low-voltage lighting
-  Electronic low-voltage lighting
-  Ceiling fan controls
-  Ceiling fan/light controls

Lighting load interfaces are not compatible with this family.

Shown actual size: Maestro IR dimmer and a 1-gang Claro wallplate in White (WH).

Shown actual size: IR transmitter in White (WH),
W: 1.5 in (38.1 mm) x H: 4.625 in (117.5 mm) x
D: .55 in (14 mm).

Available finishes

Use **BOLD** color code in model number (Example: MIR-600-**LS**)

Gloss finishes*



WH
White

LA
Light Almond

AL
Almond

IV
Ivory

GR
Gray

BR
Brown

BL
Black

Satin Colors® finishes*



SW
Snow

LS
Limestone

BI
Biscuit

ES
Eggshell

PD
Palladium

TP
Taupe

ST
Stone



BG
Bluestone

PL
Plum

SG
Sea Glass

TQ
Turquoise

GS
Goldstone

DS
Desert Stone

GB
Greenbriar

Metal finish wallplate**



MS
Mocha Stone

TC
Terracotta

SI
Sienna

HT
Hot

MR
Merlot

MN
Midnight

SS
Stainless Steel

* Coordinating wallplates only available separately. For wallplate information, see p. 236.

** Stainless Steel wallplate only available separately and includes black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls. For wallplate information, see p. 236.

Remote control digital fade dimmers



- Provides true dimming from each location (with companion dimmers)
- Tap on to preset level; tap off
- Touch rocker to adjust light level
- Tap twice for full on
- Press, hold and release for gradual fade-to-off

Incandescent/halogen dimmers

Remote control digital fade dimmers*

Single-pole 120V 600W	MIR-600- XX ¹
Single-pole 120V 1000W	MIR-1000- XX ¹
Multi-location 120V 600W	MIR-600M- XX ¹
Multi-location 120V 1000W	MIR-1000M- XX ¹

Remote control digital fade dimmers* with IR remote control

Single-pole 120V 600W	MIR-600T- XX ¹
Single-pole 120V 1000W	MIR-1000T- XX ¹
Multi-location 120V 600W	MIR-600MT- XX ¹
Multi-location 120V 1000W	MIR-1000MT- XX ¹

Remote control digital fade dimmer*, IR remote control and wallplate

Single-pole 120V 600W	MIR-600THW- XX ²
--------------------------	------------------------------------

Remote control digital fade dimmer*, IR remote control, companion dimmer, and two wallplates

Multi-location 120V 600W	MIR-603THW- XX ²
-----------------------------	------------------------------------

Magnetic low-voltage dimmers

Remote control digital fade dimmers*

Single-pole 120V 600 VA (450 W)	MIRLV-600- XX ¹
Single-pole 120V 1000 VA (800 W)	MIRLV-1000- XX ¹
Multi-location 120V 600 VA (450 W)	MIRLV-600M- XX ¹
Multi-location 120V 1000 VA (800 W)	MIRLV-1000M- XX ¹

The stated VA (Volt-Ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (Watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

Electronic low-voltage dimmers

Remote control digital fade dimmers**

Single-pole 120V 600W	MIRELV-600- XX ¹
Multi-location 120V 600W	MIRELV-600M- XX ¹

XX¹: Gloss and Satin Colors® codes, see p. 77

XX²: Gloss color codes, see p. 77

Wallplates not included. Order separately, see p. 236

All models must be derated if ganged unless otherwise noted, see p. 250–252.

* Minimum load required, see specification submittal

** Requires neutral wire connection