

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:



DESCRIPTION

naturaLED® slim canopy large is DLC Premium listed and ETL with a rating of IP65. Aesthetically pleasing construction, low-profile design with die-cast aluminum housing and shatter-resistant polycarbonate prismatic lens. Dustproof, sealed structure, 1/2" NPT threaded conduit entrances on each side. This fixture comes with optional motion sensor providing: step dimming, area sensitivity, standby time and on/off. The canopy supports both pendant mounting and direct surface mounting ceiling and wall. The Slim Canopy fixture can be Pendant Mounted and accepts a 3/4" NPT threaded and can be mounted to multiple types of J-boxes.



Rated Life 50,000 Hours
Warranty 5 Years


APPLICATIONS

Warehouses, Parking Garages, Offices, Factories, Hospitals, Hotels

FEATURES

- DLC Premium Qualified
- IP65 Rated
- ETL Listed
- ColorTemp: 4000K, 5000K
- Dimmable: 1-10V
- Input line voltage: 120-277V
- CRI: 80
- Powerfactor >0.9
- Surge Protection: 4KV
- Beam Angle: 160°
- Material: aluminum die-cast
- Shatter-resistant polycarbonate lens
- Operating temperature: - 22°F - 122°F
- 5 Year Warranty
- Finish: Black
- Optional for Purchase: Emergency Driver, Motion Sensor, Beauty Plate

DISTRIBUTION PATTERN

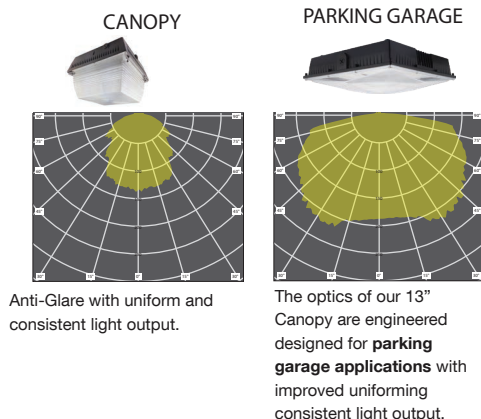

ACCESSORIES

	Beauty Plate
	Emergency Driver
	Motion Sensor
	Surge Protection

SAMPLE NUMBER FX13SCM60/840/BK

FAMILY	SIZE	SERIES	WATTAGE	CRI/COLOR TEMP	COLOR
FX fixture	13 13 inch	SCM slim canopy	60 60 watt	840 CRI 80 4000K	BK Black



SLIM CANOPY LARGE 13" x 13"

CEILING & AREA LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Dim (V)	Size	IP65 Rated	DLC (S/P)
59	9426	FX13SCM60/840/BK	4000K	7,617	250	1-10V	13"x13"	•	P
59	9427	FX13SCM60/850/BK	5000K	7,769	250	1-10V	13"x13"	•	P
82	9428	FX13SCM85/840/BK	4000K	10,062	400	1-10V	13"x13"	•	P
82	9429	FX13SCM85/850/BK	5000K	10,259	400	1-10V	13"x13"	•	P
100	9430	FX13SCM100/840/BK	4000K	13,238	>400	1-10V	13"x13"	•	P
100	9431	FX13SCM100/850/BK	5000K	13,620	>400	1-10V	13"x13"	•	P
59	9244	LED-FXSCM60/40K/BK	4000K	7,397	250	1-10V	13"x13"	•	P
59	9245	LED-FXSCM60/50K/BK	5000K	7,397	250	1-10V	13"x13"	•	P
82	9248	LED-FXSCM85/40K/BK	4000K	10,062	400	1-10V	13"x13"	•	P
82	9249	LED-FXSCM85/50K/BK	5000K	10,259	400	1-10V	13"x13"	•	P
100	9211	LED-FXSCM100/40K/BK	4000K	12,269	>400	1-10V	13"x13"	•	P
100	9212	LED-FXSCM100/50K/BK	5000K	12,516	>400	1-10V	13"x13"	•	P

ACCESSORIES (Ordered Separately)

Emergency Driver
7334 BAEM15-48BC/MV-A
(Emergency Backup Driver 120-277V)

Motion Sensor
P10234 SEN-MC605V-D
(Built-In Motion Sensor 120-277V)




Beauty Plates
P10195 PLT-SCM/14X14/WH
(14"x14" Beauty Plate used with SCM)

P10196 PLT-SCM/24X24/WH
(24"x24" Beauty Plate used with SCM)


Surge Protection
P10389 SPD-L-10KV-277
(Surge Protection 10KV 120-277V)

Surge Protection
P10390 SPD-L-20KV-277
(Surge Protection 20KV 120-277V)

DIMENSIONS

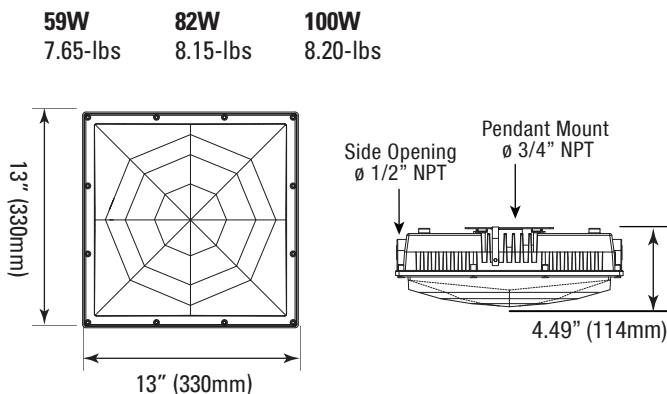

PHOTOMETRICS CHART

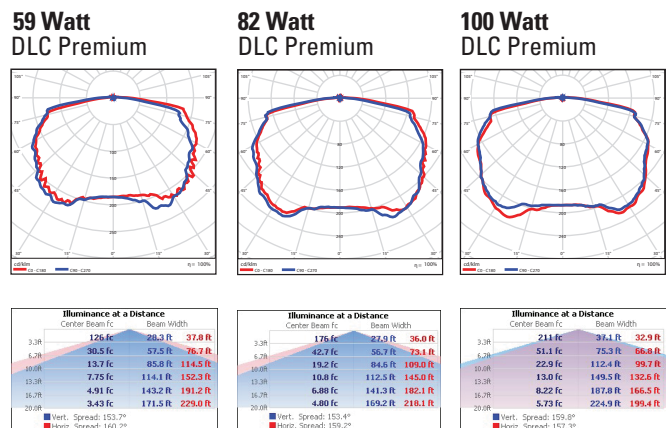

PACKAGE

Case Qty 1 pc

