

Version	2.0	Date	10/7/23
Prepared By			

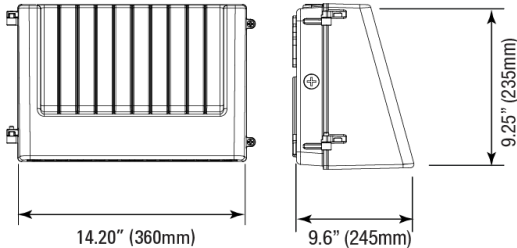
PRODUCT SPECIFICATION			
Category	Cut Off Wall Pack		
Item Number	9554		
Stock Code	FXCWP120SW/CCT3/BZ-PHO		
Mounting	Wall Mount		
Housing Color	Bronze		
PICTURE			

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	80 / 100 / 120	Replacement Wattage (W)	575-750
Tested Wattage (W)	80 / 100 / 120		
Input Voltage (V)	120-277		
Voltage Frequency (Hz)	50/60	Surge Protect Level	6KV
Input Current (A)	1.009	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	Yes
THD	<20%	Photocell	Yes

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	10,800 / 13,500 / 16,200	CCT (K)	3CCT (30/40/50K)
Efficacy (lm/w)	135	Beam Angle (°)	Forward Throw
CRI	>70		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	- 40°F ~ 122°F
Storage Temperature (°F)	- 40°F ~ 176°F
IP Rating	IP65
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10540	SEN-ANT-11-WH	Microwave Sensor 0-10V
P10316	SEN-BRI-RC100	Remote Programmer for P10540

PRODUCT DIMENSIONS			
Width- in / (mm)	14.20"	360	
Height- in / (mm)	9.25"	235	
Depth- in / (mm)	9.60"	245	
EPA (ft²)	-		
Weight (lbs)	10.56		
Mounting Height (ft)	15~25		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	UL/cUL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Premium	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS