

Version	1.0	Date	7/7/23
Prepared By	JC		

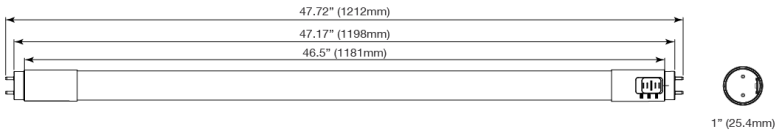
PRODUCT SPECIFICATION			
Category	Tube Type A + B	PICTURE 	
Item Number	4616		
Stock Code	LED15T8/FR20/8CCT3/AB/UNV		
Mounting	Bi-Pin		
Housing Color	White		

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	15	Replacement Wattage (W)	32W
Tested Wattage (W)	15		
Input Voltage (V)	120-277 or FL Ballast	Surge Protect Level	-
Voltage Frequency (Hz)	50/60		
Input Current (A)	0.128	Dimmable	-
Power Factor	>0.9	AUX (12V) Line	-
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	2,050	CCT (K)	3CCT (35/40/50K)
Efficacy (lm/w)	137	Beam Angle (°)	325°
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 113°
Storage Temperature (°F)	-4°F ~ 140°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
7337	BAEM25-170BC/347-C	25W Emergency Micro Inverter

PRODUCT DIMENSIONS			
Diameter- in / (mm)	1"	25.4	
Length- in / (mm)	47.72"	1212	
Depth- in / (mm)	-	-	
IK Rating	-	-	
Weight (lbs)	0.547		
Mounting Height (ft)	-		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	UL / cYL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Standard	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS
*Check for ballast compatibility