

Version	2.0	Date	9/15/22
Prepared By	JC		

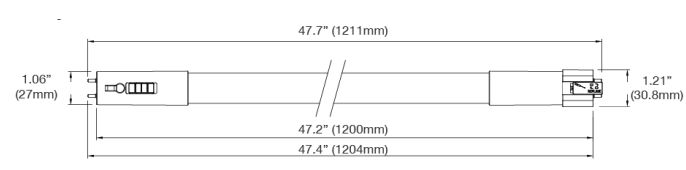
PRODUCT SPECIFICATION			
Category	Emergency Tube	PICTURE 	
Item Number	4613		
Stock Code	LEDEM14.5T8/FR20/8CCT3/MV		
Mounting	Bi-Pin		
Housing Color	Frosted Glass		

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	14.5	Replacement Wattage (W)	32
Tested Wattage (W)	14.5		
Input Voltage (V)	120-277		
Voltage Frequency (Hz)	50/60	Surge Protect Level	2KV
Input Current (A)	0.1	Dimmable	-
Power Factor	>0.9	Battery	Ternary Lithium
THD	-	Emergency Time	>90min

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	2,000	CCT (K)	3CCT (35/40/50K)
Efficacy (lm/w)	138	Beam Angle (°)	325°
CRI	80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	32°F ~ 113°
Storage Temperature (°F)	32°F ~ 113°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description

PRODUCT DIMENSIONS			
Width- in / (mm)	47.4"	1204	
Height- in / (mm)	1.06"	27	
Depth- in / (mm)	-	-	
IK Rating	-	-	
Weight (lbs)	0.76		
Mounting Height (ft)	-		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	UL924 / UL1598C	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC		RoHS	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS