

NL-301AT

TRUE 3" Non-IC Air-Tight Low Voltage New Construction Housing

Source: 50W MR16 max.

Type

Project

Catalog No.

Notes

PRODUCT DESCRIPTION

3" Low Voltage housings are a true three inches! Reduced wattage housings are useful in meeting watts per square foot requirements. Housings are available with magnetic or electronic transformers.

CONSTRUCTION

Plastic Frame: .025 steel frame with integral bar hanger brackets. Brackets can accommodate longer 27" accessory flat bar hangers. Shipping screw installed to provide extra security for transformer during shipment - remove before installation.

Housing: .050 white baked enamel one-piece drawn steel housing.

Minimum Clearance: Non-IC housings require a minimum clearance of 3" from thermal insulation and 1/2" from adjacent building components.

Air Flow Restriction: Housing has factory installed gaskets to restrict airflow from room into ceiling plenum to <2CFM (cubic feet per minute) in accordance with ASTM-283 Air-Tight requirements.

Bar Hangers: Two 13-3/4" to 24-1/2" adjustable bar hangers with captive nails are included on frame. Hanger bars have T-Bar slot and alignment feet. Bar hangers are parallel to junction box, but can be repositioned 90° perpendicular to junction box if desired. "L" Shaped bar hanger foot to align to bottom of construction joist. A T-Bar notch allows easy installation in a suspended ceiling.

Junction Box: Prewired 14 cubic inch 0.060" thick galvanized steel, with four 7/8" knockouts, four Romex® pryouts, and snap on cover. All leads are #18AWG wire, the ground wire is connected to the bottom, and quick connectors are supplied on all leads. Through branch circuit wiring, (4-in, 4-out).

Transformer:

Electronic: Thermally protected, single tap input voltage available in 12V 60Hz with short circuit protection. Approved for use with LED lamps.

Magnetic: Thermally protected, single tap input voltage available in 12V 60Hz. Class H.

ELECTRICAL

Input Voltage: 120V

Output Voltage: 12V

Socket: Bi-Pin GU5.3 socket with heat shield

Wattage: 50W max.

Lamp: MR16 (not included)

Transformer: Electronic or Magnetic (must specify)

COMPATIBLE TRIMS

NL-3410 - Square with Round Baffle

NL-3412 - Square with Round Reflector

NL-3420 - Square Pinhole

NL-3310 - Round Adjustable Baffle

NL-3312 - Round Adjustable Reflector

NL-3320 - Round Metal Trim with 1" Pinhole

NL-3345 - Round Adjustable Slot Aperture

NL-3365 - Round Adjustable Gimbal

NL-3366 - Round Front Load Gimbal

NL-3318 - Round Eyeball with Baffle

NL-3348 - Round Wall Wash with Baffle

NL-3325 - Round Frosted Dome Lens, Wet Listed

NL-3326 - Round Flat Lens, Wet Listed

OPTIONAL ACCESSORIES

NRA-28 - 27" Flat Bar Hangers




NRA-36 - Replacement socket with heat shield

LABELS AND LISTINGS

- cULus Listed for Damp Location w/ Feed Through (Wet Location when used with designated trims)
- Meets or exceeds ASTM-283 Air-Tight Requirements



PRODUCT IMAGES & DIMENSIONS

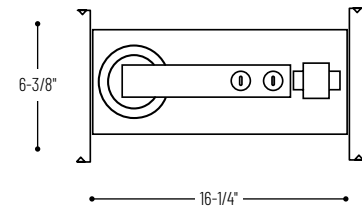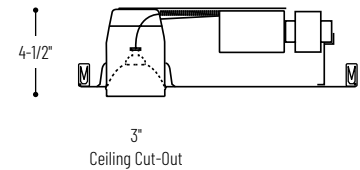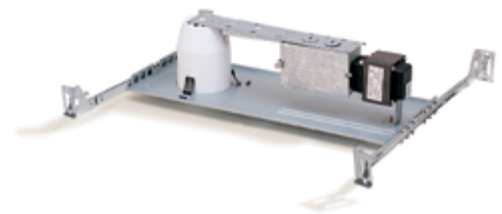

TRUE 3" Non-IC Air-Tight Low Voltage New Construction Housing

Catalog No.

NL-301AT = TRUE 3" Non-IC Air-Tight Low Voltage New Construction Housing, 120V Magnetic, 50W max.

NL-301AT/20 = TRUE 3" Non-IC Air-Tight Low Voltage New Construction Housing, 120V Magnetic, Labeled 20W max.

NL-301AT/37 = TRUE 3" Non-IC Air-Tight Low Voltage New Construction Housing, 120V Magnetic, Labeled 37W max.

NL-301AT/1EL = TRUE 3" Non-IC Air-Tight Low Voltage New Construction Housing, 120V Electronic, 3W-50W

Optional Accessories

Catalog No.

NRA-28 = 27" Flat Bar Hangers

NRA-36 = Replacement socket with heat shield

Example: **NL-301AT** = TRUE 3" Non-IC Air-Tight Low Voltage New Construction Housing, 120V Magnetic, 50W max.