


# NL-3366

## Front Loading Adjustable Gimbal

### TRIM DIMENSIONS



### FEATURES

#### Trim

Metal trim with adjustable ring can be adjusted up to 35°. Adjustable ring allows lamp to be mounted on top of the trim. Trim ring available in metal, may also be used with custom combination of plastic or metal ring finishes.

#### Mounting

Trim includes three trim clips that securely mount trim in housing.

#### Compatible Housings

Compatible with Low Voltage housings.

See individual specification sheets for more information.

#### Lamp

##### Low Voltage

**IMPORTANT: DO NOT USE GLASS LENS (PROVIDED) WHEN ALREADY USING LAMP WITH GLASS COVER**  
20W-50W 12V MR16 (NL-301 Series; NLIC-301 Series)

#### Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

### Front Loading Adjustable Gimbal

- NL-3366B:** Black Front Loading Adjustable Gimbal with Black Ring
- NL-3366BZ:** Bronze Front Loading Adjustable Gimbal with Bronze Ring
- NL-3366C:** Chrome Front Loading Adjustable Gimbal with Chrome Ring
- NL-3366CO:** Copper Front Loading Adjustable Gimbal with Copper Ring
- NL-3366G:** Gold Front Loading Adjustable Gimbal with Gold Ring
- NL-3366N:** Natural Metal Front Loading Adjustable Gimbal with Natural Metal Ring
- NL-3366W:** White Front Loading Adjustable Gimbal with White Ring

Type


Project

Catalog No.


Lamp/Wattage

### HOUSING DIMENSIONS

#### NL-301 SERIES

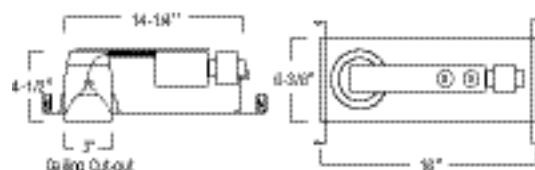

#### NLIC-301 SERIES

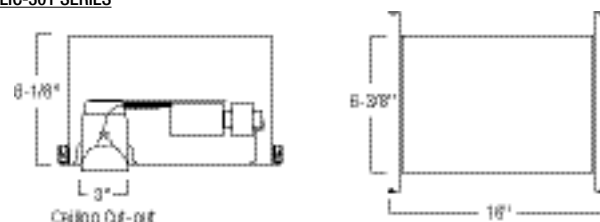

### Compatible Housings

#### LOW VOLTAGE

|                       |                                |          |                            |
|-----------------------|--------------------------------|----------|----------------------------|
| <b>NL-301QAT/20</b>   | Non-IC AT New Const., Mag.     | 20W MR16 | W: 6-3/8" L: 16" H: 5-5/8" |
| <b>NL-301QAT/37</b>   | Non-IC AT New Const., Mag.     | 37W MR16 | W: 6-3/8" L: 16" H: 5-5/8" |
| <b>NL-301QAT</b>      | Non-IC AT New Const., Mag.     | 50W MR16 | W: 6-3/8" L: 16" H: 5-5/8" |
| <b>NL-301AT/1EL</b>   | Non-IC AT New Const., Elec.    | 50W MR16 | W: 6-3/8" L: 16" H: 5-5/8" |
| <b>NLIC-301QAT/20</b> | IC Air-Tight New Const., Mag.  | 20W MR16 | W: 6-3/8" L: 16" H: 8-1/8" |
| <b>NLIC-301QAT/37</b> | IC Air-Tight New Const., Mag.  | 37W MR16 | W: 6-3/8" L: 16" H: 8-1/8" |
| <b>NLIC-301QAT</b>    | IC Air-Tight New Const., Mag.  | 50W MR16 | W: 6-3/8" L: 16" H: 8-1/8" |
| <b>NLIC-301AT/1EL</b> | IC Air-Tight New Const., Elec. | 50W MR16 | W: 6-3/8" L: 16" H: 8-1/8" |