

NL-467

4" Adjustable Gimbal with Baffle

FEATURES

Trim: Metal trim with adjustable gimbal can be adjusted 35°. Precision spun 0.040 aluminum baffle with deep grooves to reduce aperture glare. Gimbal ring allows lamp to be mounted on top of the trim. Trim ring available in metal, may also be used with custom combination of plastic or metal ring finishes.

Mounting: Trim includes three trim clips that securely mounts inside the housing.

COMPATIBLE LAMP / HOUSINGS

Low Voltage:

20W MR16 max. (NL-401QAT/20; NLIC-401QSAT/20; NLR-404QAT/20; NLR-405AT/20; NLIC-402SAT/20; NL-402S/20; NLR-403S/20)
37W MR16 max. (NL-401QAT/37; NLIC-401QSAT/37; NLR-404QAT/37; NLR-405AT/37; NLIC-402QSAT/37; NL-402S/37; NLR-403S/37)

50W MR16 max. (NLIC-401AT/1EL; NLIC-401AT/2EL; NLIC-401QSAT; NL-401AT/1EL; NL-401AT/2EL; NL-401QAT; NLR-404AT/1EL; NLR-404AT/2EL; NLR-404QAT; NLR-405AT; NLIC-402AT/1EL; NLIC-402QSAT; NL-402S/1EL; NL-402S; NLR-403S/1EL; NLR-403S)

Line Voltage:

20W MR16 max. (NSEIC-407AT/20; NSERIC-407AT/20)

25W MR16 max. (NFBIC-401AT/25A)

50W MR16 GU10 max. (NSL-401AT/10; NSLIC-401AT/10; NSLR-404AT/10)

OPTIONAL ACCESSORIES:

NM-100B/MR16: Blue Lens/Filter

NM-100C/MR16: Clear Lens/Filter (included with NL-467)

NM-100F/MR16: Frosted Lens/Filter

NM-100G/MR16: Green Lens/Filter

NM-100L/MR16: Linear Lens/Filter

NM-100R/MR16: Red Lens/Filter

NM-100S/MR16: Spread Lens/Filter

NM-100Y/MR16: Yellow Lens/Filter

NT-350B: Black Accessory Snoot

IMPORTANT: DO NOT USE GLASS LENS WHEN ALREADY USING LAMP W/ GLASS COVER

LISTING

cULus Listed for Damp Locations when used with compatible housing



4" Adjustable Gimbal with Baffle

Catalog No.

NL-467BN = 4" Natural Metal Adjustable Gimbal with Black Baffle

NL-467BW = 4" White Adjustable Gimbal with Black Baffle

NL-467WW = 4" White Adjustable Gimbal with White Baffle


Type

Project

Catalog No.

Notes

PRODUCT IMAGES AND DIMENSIONS

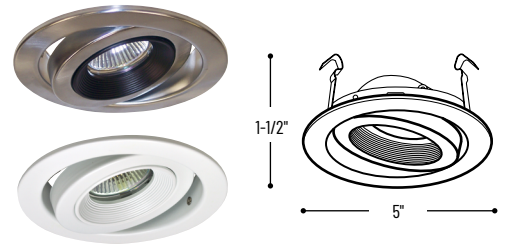

Compatible Housings

Catalog No.

Low Voltage

NLIC-401QSAT/20 = ICAT New Construction / 120V Magnetic / 20W

NLIC-401QSAT/37 = ICAT New Construction / 120V Magnetic / 37W

NLIC-401QSAT = ICAT New Construction / 120V Magnetic / 50W

NLIC-401AT/1EL = ICAT New Construction / 120V Electronic / 50W

NLIC-401AT/2EL = ICAT New Construction / 120V Electronic / 50W

NL-401QAT/20 = Non-IC AT New Construction / 120V Magnetic / 20W

NL-401QAT/37 = Non-IC AT New Construction / 120V Magnetic / 37W

NL-401QAT = Non-IC AT New Construction / 120V Magnetic / 50W

NL-401AT/1EL = Non-IC AT New Construction / 120V Electronic / 50W

NL-401AT/2EL = Non-IC AT New Construction / 277V Electronic / 50W

NLIC-402QSAT/20 = ICAT Shallow New Construction / 120V Magnetic / 20W

NLIC-402QSAT/37 = ICAT Shallow New Construction / 120V Magnetic / 37W

NLIC-402QSAT = ICAT Shallow New Construction / 120V Magnetic / 50W

NLIC-402AT/1EL = ICAT Shallow New Construction / 120V Electronic / 50W

NL-402S/20 = Non-IC Shallow New Construction / 120V Magnetic / 20W

NL-402S/37 = Non-IC Shallow New Construction / 120V Magnetic / 37W

NL-402S = Non-IC Shallow New Construction / 120V Magnetic / 50W

NL-402S/1EL = Non-IC Shallow New Construction / 120V Electronic / 50W

NLR-403S/20 = Non-IC Shallow Remodel / 120V Magnetic / 20W

NLR-403S/37 = Non-IC Shallow Remodel / 120V Magnetic / 37W

NLR-403S = Non-IC Shallow Remodel / 120V Magnetic / 50W

NLR-403S/1EL = Non-IC Shallow Remodel / 120V Electronic / 50W

NLR-404QAT/20 = Non-IC AT Remodel / 120V Magnetic / 20W

NLR-404QAT/37 = Non-IC AT Remodel / 120V Magnetic / 37W

NLR-404QAT = Non-IC AT Remodel / 120V Magnetic / 50W

NLR-404AT/1EL = Non-IC AT Remodel / 120V Electronic / 50W

NLR-404AT/2EL = Non-IC AT Remodel / 277V Electronic / 50W

NLR-405AT/20 = Non-IC AT Remodel / No Transformer / 20W

NLR-405AT/37 = Non-IC AT Remodel / No Transformer / 37W

NLR-405AT = Non-IC AT Remodel / No Transformer / 50W

Line Voltage

NSEIC-407AT/20 = ICAT LED New Construction / 20W

NSERIC-407AT/20 = ICAT LED Remodel / 20W

NFBIC-401AT/25A = Fire Rated IC Air-Tight New Construction / 25W

NSLIC-401AT/10 = ICAT New Construction / 50W

NSL-401AT/10 = Non-IC Air-Tight New Construction / 50W

NSLR-404AT/10 = Non-IC Air-Tight Remodel / 50W

Example: **NL-467WW** = 4" White Adjustable Gimbal with White Baffle