

NL-469

4" 45° Adjustable Reflector with Ring

FEATURES

Trim: Precision spun 0.050 aluminum bias cut high grade reflector for full lamp distribution. Gimbal ring allows lamp to be mounted on top of the trim and adjustable up to 45°.

Mounting: Trim includes three trim clips that securely mounts inside the housing.

COMPATIBLE LAMP / HOUSINGS

Low Voltage:

20W MR16 max. (NL-401QAT/20; NLIC-401QSAT/20; NLR-404QAT/20; NLR-405AT/20; NLIC-402SAT/20; NL-402S/20; NLR-403S/20)
37W MR16 max. (NL-401QAT/37; NLIC-401QSAT/37; NLR-404QAT/37; NLR-405AT/37; NLIC-402QSAT/37; NL-402S/37; NLR-403S/37)
50W MR16 max. (NLIC-401AT/1EL; NLIC-401AT/2EL; NLIC-401QSAT; NL-401AT/1EL; NL-401AT/2EL; NL-401QAT; NLR-404AT/1EL;
NLR-404AT/2EL; NLR-404QAT; NLR-405AT; NLIC-402AT/1EL; NLIC-402QSAT; NL-402S/1EL; NL-402S; NLR-403S/1EL; NLR-403S)
75W MR16 max. (NL-401/75/1EL; NL-401/75/2EL; NL-401/75; NLR-404/75/1EL; NLR-404/75/2EL; NLR-404/75)

Line Voltage:

20W MR16 max. (NSEIC-407AT/20; NSERIC-407AT/20)
25W MR16 max. (NFBIC-401AT/25A)
50W MR16 GU10 max. (NSL-401AT/10; NSLIC-401AT/10; NSLR-404AT/10)

IMPORTANT: DO NOT USE GLASS LENS WHEN ALREADY USING LAMP W/ GLASS COVER

LISTING

cULus Listed for Damp Locations when used with compatible housing




Type

Project

Catalog No.

Notes

PRODUCT IMAGES AND DIMENSIONS

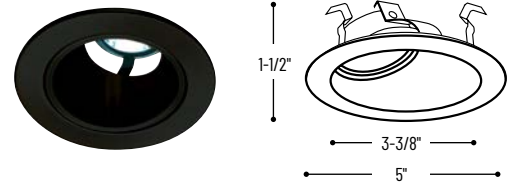

Compatible Housings

Catalog No.

Low Voltage

NLIC-401QSAT/20 = ICAT New Construction / 120V Magnetic / 20W
NLIC-401QSAT/37 = ICAT New Construction / 120V Magnetic / 37W
NLIC-401QSAT = ICAT New Construction / 120V Magnetic / 50W
NLIC-401AT/1EL = ICAT New Construction / 120V Electronic / 50W
NLIC-401AT/2EL = ICAT New Construction / 120V Electronic / 50W
NL-401QAT/20 = Non-IC AT New Construction / 120V Magnetic / 20W
NL-401QAT/37 = Non-IC AT New Construction / 120V Magnetic / 37W
NL-401QAT = Non-IC AT New Construction / 120V Magnetic / 50W
NL-401/75 = Non-IC New Const. / 120V Magnetic / 75W
NL-401AT/1EL = Non-IC AT New Construction / 120V Electronic / 50W
NL-401AT/2EL = Non-IC AT New Construction / 277V Electronic / 50W
NL-401/75/1EL = Non-IC New Construction / 120V Electronic / 75W
NL-401/75/2EL = Non-IC New Construction / 277V Electronic / 75W
NLIC-402QSAT/20 = ICAT Shallow New Construction / 120V Magnetic / 20W
NLIC-402QSAT/37 = ICAT Shallow New Construction / 120V Magnetic / 37W
NLIC-402QSAT = ICAT Shallow New Construction / 120V Magnetic / 50W
NLIC-402AT/1EL = ICAT Shallow New Construction / 120V Electronic / 50W
NL-402S/20 = Non-IC Shallow New Construction / 120V Magnetic / 20W
NL-402S/37 = Non-IC Shallow New Construction / 120V Magnetic / 37W
NL-402S = Non-IC Shallow New Construction / 120V Magnetic / 50W
NL-402S/1EL = Non-IC Shallow New Construction / 120V Electronic / 50W
NLR-403S/20 = Non-IC Shallow Remodel / 120V Magnetic / 20W
NLR-403S/37 = Non-IC Shallow Remodel / 120V Magnetic / 37W
NLR-403S = Non-IC Shallow Remodel / 120V Magnetic / 50W
NLR-403S/1EL = Non-IC Shallow Remodel / 120V Electronic / 50W
NLR-404QAT/20 = Non-IC AT Remodel / 120V Magnetic / 20W
NLR-404QAT/37 = Non-IC AT Remodel / 120V Magnetic / 37W
NLR-404QAT = Non-IC AT Remodel / 120V Magnetic / 50W
NLR-404/75 = Non-IC Remodel / 120V Magnetic / 75W
NLR-404AT/1EL = Non-IC AT Remodel / 120V Electronic / 50W
NLR-404AT/2EL = Non-IC AT Remodel / 277V Electronic / 50W
NLR-404/75/1EL = Non-IC Remodel / 120V Electronic / 75W
NLR-404/75/2EL = Non-IC Remodel / 277V Electronic / 75W
NLR-405AT/20 = Non-IC AT Remodel / No Transformer / 20W
NLR-405AT/37 = Non-IC AT Remodel / No Transformer / 37W
NLR-405AT = Non-IC AT Remodel / No Transformer / 50W

Line Voltage

NSEIC-407AT/20 = ICAT LED New Construction / 20W
NSERIC-407AT/20 = ICAT LED Remodel / 20W
NFBIC-401AT/25A = Fire Rated IC Air-Tight New Construction / 25W
NSLIC-401AT/10 = ICAT New Construction / 50W
NSL-401AT/10 = Non-IC Air-Tight New Construction / 50W
NSLR-404AT/10 = Non-IC Air-Tight Remodel / 50W

4" 45° Adjustable Reflector with Ring

Catalog No.

NL-469B = 4" 45° Black Adjustable Stepped Baffle with White Metal Ring
NL-469C = 4" 45° Specular Clear Adjustable Reflector with White Metal Ring
NL-469HZ = 4" 45° Haze Adjustable Reflector with White Metal Ring
NL-469N = 4" 45° Natural Metal Adjustable Reflector with Natural Metal Ring
NL-469W = 4" 45° Specular White Adjustable Reflector with White Metal Ring

Example: **NL-469B** = 4" 45° Black Adjustable Stepped Baffle with White Metal Ring