

NMIOT Series

Iolite Multiple Series

Source: 12W LED per head
1000lm per head

PRODUCT DESCRIPTION

Endless possibilities with Iolite multiple's functionality and architectural aesthetics. Iolite multiple recessed family consist of one to three independently adjustable heads, variety of beam distributions and multiple reflector options. Iolite multiple series is a perfect solution for most retail, hospitality and commercial applications.

FEATURES

- One to three head configurations
- Three optics included with each trim type (Premium TIR optics available)
- Customizable Trim options available
- Housing includes individual drivers for each module
- Cree® COB or Comfort Dim technology
- Triac, ELV or 0-10V dimming

SPECIFICATION

Housing: 0.0475" Galvanized steel housing with quick connects from each driver for ease of installation. Housing accepts standard ceiling thickness up to 1-1/2" may vary depending on ceiling type (up to 1" ceiling thickness when used with NMIO-W).

Air Flow Restriction: Housing has factory installed gaskets to restrict airflow from room into ceiling plenum to <2CFM (cubic feet per minute) in accordance with ASTM-283 Air-Tight requirements.

Clearance: "IC" Insulated ceiling housings are direct contact rated; no minimum clearance is required.

Bar Hangers: Two 13-7/8" to 25" adjustable bar hangers with captive nails are included with the housing. Bar hangers are parallel to junction box, but can be repositioned 90° perpendicular to junction box if desired. "L"-shaped bar hanger foot to align to bottom of construction joist. A T-bar notch allows for easy installation in a suspended ceiling.

Junction Box: Pre-wired 40 cubic inch 0.0475" thick galvanized steel, with six 1/2" knockouts. Leads are #18AWG wire. Suitable through branch circuit wiring, 4-in, 4-out (2-in, 2-out with wall wash trim).

ELECTRICAL

Voltage: 120-277V

Lumens / Wattage:

1000lm / 12W per head (Comfort Dim is 800lm per head) (Delivered lumens will vary depending on reflector, CCT, beam spread and finish)

Color Temperature:

2700K, 3000K, 3500K, 4000K or 5000K

CRI: 90+CRI

Optics (included): 25° Spot, 38° Narrow Flood, 60° Flood
Comfort Dim: Comfort Dim color tunes the temperature from a bright 3100K, to a romantic and comfortable 2000K on a gradual, even curve. Available in 800lm only.

Dimming: Triac, ELV or 0-10V

[Click Here](#) or check complete dimmer list at www.NoraLighting.com in the "Compatibility" page under "Resources" tab.

Trim Assembly: Each trim assembly includes three optics (flood 60° - installed, narrow flood 38° and spot 25°) and quick connect for easy installation. Trim options include a fixed snoot, adjustable snoot (20° adj.) and wall wash. Premium TIR optics are available in 15° and 25° beam spreads.

LABELS AND LISTINGS

- cULus Listed for Damp Location
- ENERGY STAR certified (wall wash not certified)
- [5-Year Limited Warranty](#)
- Certified to the high efficacy requirements of California Title 24 JA8-2019




Type

Project

Catalog No.


Notes

PRODUCT IMAGES AND DIMENSIONS

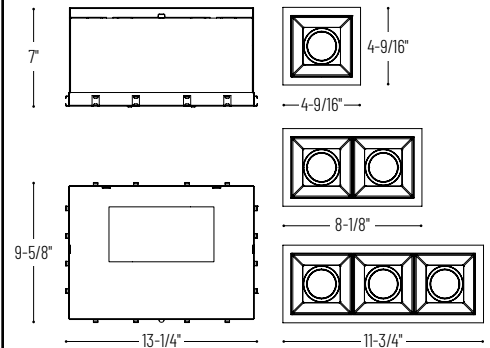

Hole Cut-Out

- 1-Head: 3.95" x 3.95"
- 2-Head: 7-1/2" x 3.95"
- 3-Head: 11" x 3.95"



NMIOT-F
Fixed Downlight
B, BMPW, HZ, MPW



NMIOT-A
Adjustable Snoot
B, HZ, MPW



NMIOT-W
Wall Wash
B, HZ, MPW

Iolite Multiple New Construction Housing

Number of Head(s)	Driver / Dimming
NMHIOIC-11 = One Head	LE4 = 120-277V input; Triac / ELV / 0-10V dimming
NMHIOIC-12 = Two Heads	
NMHIOIC-13 = Three Heads	

Optional Accessories

Description
NIO-REFLTIR15 = Premium 15° TIR Optic (must specify per head)
NIO-REFLTIR25 = Premium 25° TIR Optic (must specify per head)

Iolite Multiple Trim

Number of Head(s)	Flange Finish	Trim Type (specify one per head)	Color Temp.	Lumens / Wattage per Head	Trim Finish
NMIOT-11 = One Head	-B = Black	-A = Adjustable Snoot	-27X = 2700K	-10 = 1000lm / 12W per head	-B = Black
NMIOT-12 = Two Heads	-MPW = Matte Powder White	-B = Blank Finished Plate	-30X = 3000K	(800lm w/Comfort Dim)	-BMPW* = Black / Matte Powder White (Fixed downlight only)
NMIOT-13 = Three Heads		-F = Fixed Downlight	-35X = 3500K		-HZ = Haze
		-W = Wall Wash	-40X = 4000K		-MPW = Matte Powder White
			-50X = 5000K		
			-CDX = Comfort Dim		

* Adjustable snoot and/or wall wash ordered in combination with BMPW will be MPW

Example: **NMHIOIC-13LE4 / NMIOT-13-MPW-AAF-30X-10-MPW** = Three Head Iolite Multiple, Matte Powder White Flange, Adjustable Snoot-Fixed-Adjustable Snoot, 3000K, 1000lm / 12W per head, / Matte Powder White finish

PHOTOMETRICS

Iolite Multiple Series

Type


Project

Catalog No.

Notes

Test Information

Test Number: NTR11396
Part Number: NM10T-11-B-F-40X-10-BMPW
Beam Spread: 26° Spot
Lumens: 1361lm
Wattage: 11.65W
Efficacy: 117lpw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180): 0.44
Spacing Criteria (90°-270): 0.44



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	193fc	1'-10"
6'	85.6fc	2'-10"
8'	48.2fc	3'-8"
10'	30.8fc	4'-7"
12'	21.4fc	5'-6"

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	868	63.8
0-40	1157	85
0-60	1346	98.9
0-90	1349	99.1
90-180	12	0.9
0-180	1361	100

Candela Table

Vertical Angles	Candela
0	3082
5	2821
15	1208
25	595
35	464
45	227

Test Information

Test Number: NTR11397
Part Number: NM10T-11-B-F-40X-10-BMPW
Beam Spread: 38° Narrow Flood
Lumens: 1368lm
Wattage: 11.65W
Efficacy: 117lpw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180): 0.64
Spacing Criteria (90°-270): 0.64



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	127fc	2'-10"
6'	56.5fc	4'-4"
8'	31.8fc	5'-8"
10'	20.4fc	7'-1"
12'	14.1fc	8'-6"

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	867	63.4
0-40	1152	84.2
0-60	1354	99
0-90	1361	99.5
90-180	7	0.5
0-180	1368	100

Candela Table

Vertical Angles	Candela
0	2036
5	1942
15	1386
25	654
35	455
45	237

Test Information

Test Number: NTR11398
Part Number: NM10T-11-B-F-40X-10-BMPW
Beam Spread: 60° Flood
Lumens: 1340lm
Wattage: 11.64W
Efficacy: 115lpw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180): 0.9
Spacing Criteria (90°-270): 0.9



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	53.8fc	4'-11"
6'	23.9fc	7'-5"
8'	13.5fc	9'-11"
10'	8.6fc	12'-5"
12'	6fc	14'-10"

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	750	55.9
0-40	1095	81.7
0-60	1323	98.7
0-90	1333	99.5
90-180	7	0.5
0-180	1340	100

Candela Table

Vertical Angles	Candela
0	1194
5	1178
15	1033
25	763
35	557
45	258

PHOTOMETRICS

Iolite Multiple Series

Type


Project

Catalog No.

Notes

Test Information

Test Number: NTR11391
Part Number: NM10T-11-MPW-A-40X-10-MPW
Beam Spread: 25° Spot
Lumens: 1116lm
Wattage: 11.63W
Efficacy: 96lpw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180): 0.44
Spacing Criteria (90°-270): 0.44



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	193fc	1'-10"
6'	85.8fc	2'-8"
8'	48.2fc	3'-6"
10'	30.9fc	4'-5"
12'	21.4fc	5'-4"

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	824	73.8
0-40	921	82.5
0-60	1045	93.6
0-90	1111	99.5
90-180	6	0.5
0-180	1116	100

Candela Table

Vertical Angles	Candela
0	3087
5	2834
15	1120
25	574
35	122
45	84

Test Information

Test Number: NTR11392
Part Number: NM10T-11-MPW-A-40X-10-MPW
Beam Spread: 38° Narrow Flood
Lumens: 1096lm
Wattage: 11.62W
Efficacy: 94lpw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180): 0.6
Spacing Criteria (90°-270): 0.6



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	127fc	2'-7"
6'	56.3fc	3'-11"
8'	31.7fc	5'-2"
10'	20.3fc	6'-6"
12'	14.1fc	7'-10"

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	796	72.6
0-40	896	81.8
0-60	1023	93.3
0-90	1091	99.5
90-180	5	0.5
0-180	1096	100

Candela Table

Vertical Angles	Candela
0	2028
5	1918
15	1239
25	619
35	126
45	85

Test Information

Test Number: NTR11393
Part Number: NM10T-11-MPW-A-40X-10-MPW
Beam Spread: 60° Flood
Lumens: 1060lm
Wattage: 11.62W
Efficacy: 91lpw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180): 0.84
Spacing Criteria (90°-270): 0.84



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	77.9fc	4'-1"
6'	34.6fc	6'-1"
8'	19.5fc	8'-1"
10'	12.5fc	10'-1"
12'	8.7fc	12'-2"

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	701	66.1
0-40	849	80.1
0-60	986	93.1
0-90	1055	99.6
90-180	5	0.4
0-180	1060	100

Candela Table

Vertical Angles	Candela
0	1246
5	1221
15	982
25	708
35	208
45	93

PHOTOMETRICS

Iolite Multiple Series

Type

Project

Catalog No.

Notes

Test Information

Test Number: NTR11400R1
 Part Number: NM10T-11-B-W-40X-10-MPW
 Lumens: 586lm
 Wattage: 11.85W
 Efficacy: 49lpw
 CCT / CRI: 4000K / 90 CRI
 Spacing Criteria (0°-180): 0.9
 Spacing Criteria (90°-270): 1.28

Multiple unit data (footcandles)


	2' from wall		
	2' on center		
1'	31	28	31
2'	30	31	30
3'	17	18	17
4'	10	10	10
5'	6	6	6
6'	4	4	4
7'	2	2	2
8'	2	2	2
9'	1	1	1
10'	1	1	1

Multiple unit data (footcandles)

	2' from wall		
	3' on center		
1'	28	16	28
2'	25	22	25
3'	15	15	15
4'	8	9	8
5'	5	5	5
6'	3	4	3
7'	2	2	2
8'	2	2	2
9'	1	1	1
10'	1	1	1

Multiple unit data (footcandles)

	3' from wall		
	3' on center		
1'	8	7	8
2'	16	15	16
3'	13	14	13
4'	9	10	9
5'	6	7	6
6'	4	5	4
7'	3	3	3
8'	2	2	2
9'	2	2	2
10'	1	1	1



Example: Two luminaires located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 13fc beneath and 14fc between luminaires.