

NMIOTL Series

Iolite Multiple Trimless

Source: 12W LED per head
1000lm per head

PRODUCT DESCRIPTION

Endless possibilities with Iolite multiple's functionality and architectural aesthetics. Iolite multiple recessed family consist of one to three independently adjustable heads, variety of beam distributions and multiple reflector options. Iolite multiple series is a perfect solution for most retail, hospitality and commercial applications.

FEATURES

- Trimless knife edge appearance
- One to three head configurations
- Three optics included with each trim type (Premium TIR optics available)
- Customizable reflector options
- Cree® COB or Comfort Dim technology

SPECIFICATION

Housing: 0.0475" Galvanized steel housing with quick connects from each driver for ease of installation. Housing accepts standard ceiling thickness up to 1-1/2" may vary depending on ceiling type (up to 1" ceiling thickness when used with NMIO-W).

Air Flow Restriction: Housing has factory installed gaskets to restrict airflow from room into ceiling plenum to <2CFM (cubic feet per minute) in accordance with ASTM-283 Air-Tight requirements.

Clearance: "IC" Insulated ceiling housings are direct contact rated. **Not to be used in direct contact with spray foam insulation.**

Mud Plate: Galvanized steel mud plate for a premium finishing technique with minimalist appearance.

Mounting: Mud plate mounts inside Iolite Multiple Housing and screws into drywall to be flush. A professional drywall finisher floats the ceiling to blend in the mud plate, sands and paints. The reflectors are then inserted into the mud plate and the results are a spectacular, minimalist appearance with no flange.

Optics: Each reflector includes field changeable optics (spot, narrow flood and flood - preinstalled). Premium 15° and 25° TIR optics are also available. (Note: TIR optics are not compatible with Comfort Dim)

ELECTRICAL

Lumens / Wattage:

1000lm / 12W per head (Comfort Dim is 800lm per head) (Delivered lumens will vary depending on reflector, CCT, beam spread and finish)

Color Temperature: 2700K, 3000K, 3500K, 4000K, 5000K

CRI: 90+ CRI

Optics (included): Spot, Narrow Flood, Flood

Comfort Dim: Comfort Dim color tunes the temperature from a bright 3100K, to a romantic and comfortable 2000K on a gradual, even curve. Available in 800lm only.

Dimming: Triac, ELV or 0-10V

[Click Here](#) or check complete dimmer list at

www.NoraLighting.com in the "Compatibility" page under "Resources" tab.

REFLECTORS

Fixed Downlight: Fixed downlight delivers over 1300lm in four finishes; Black (B), Black interior / Matte Powder White (BMPW - Note: adjustable and wall wash reflectors mixed with BMPW will be MPW), Haze (HZ) or Matte Powder White (MPW).

Adjustable Snoot: Rotates 359° horizontally and pivots 20° delivering over 1100 lumens in three finishes; Black (B), Haze (HZ) or Matte Powder White (MPW).

Wall Wash: Fixed wall wash reflector aims LED modules at optimal angle for maximum light distribution along wall surfaces. Available in three finishes; Black (B), Haze (HZ) or Matte Powder White (MPW).

Blank Plate: Blank plate is used in conjunction with two or three head configurations where a blank head is needed. Available in three finishes; Black (B), Haze (HZ) or Matte Powder White (MPW).

LABELS AND LISTINGS

- cULus Listed for Damp Location
- ENERGY STAR certified (wall wash not certified)
- [5-Year Limited Warranty](#)
- Certified to the high efficacy requirements of California Title 24 JA8-2019




Type

Project

Catalog No.

Notes

PRODUCT IMAGES AND DIMENSIONS

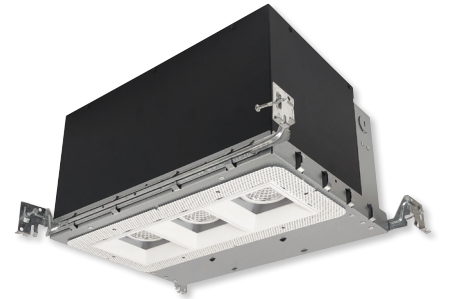


Ceiling Cut-Out

1-Head: 3.95" x 3.95"


2-Head: 7-1/2" x 3.95"

3-Head: 11" x 3.95"

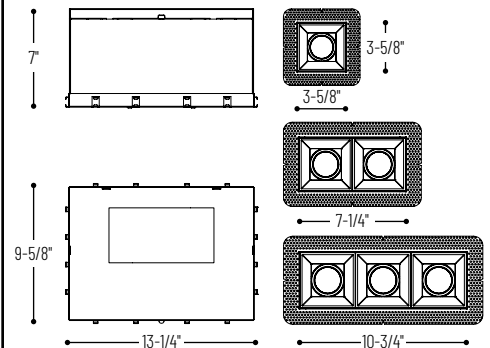

Fixed Downlight
B, BMPW, HZ, MPW

Blank Plate
B, HZ, MPW

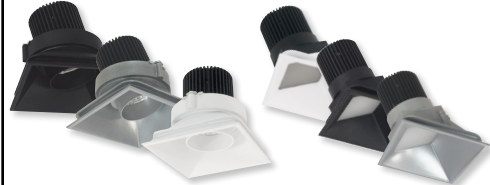

Adjustable Snoot
B, HZ, MPW

Wall Wash
B, HZ, MPW

Iolite Multiple New Construction Housing

Number of Head(s)	Driver / Dimming
NMHIOIC-11 = One Head	LE4 = 120-277V input; Triac / ELV / 0-10V dimming
NMHIOIC-12 = Two Heads	
NMHIOIC-13 = Three Heads	

Optional Accessories

Description
NIO-REFLTIR15 = Premium 15° TIR Optic (must specify per head)
NIO-REFLTIR25 = Premium 25° TIR Optic (must specify per head)

Iolite Multiple Trimless Reflectors

Number of Head(s)	Flange Finish	Trim Type (specify one per head)	Color Temp.	Lumens / Wattage per Head	Trim Finish
NMIOTL-11 = One Head	-NF = No Flange	-A = Adjustable Snoot	-27X = 2700K	-10 = 1000lm / 12W per head (800lm w/Comfort Dim)	-B = Black
NMIOTL-12 = Two Heads		-B = Blank Finished Plate	-30X = 3000K		-BMPW* = Black / Matte Powder White (Fixed downlight only)
NMIOTL-13 = Three Heads		-F = Fixed Downlight	-35X = 3500K		-HZ = Haze
		-W = Wall Wash	-40X = 4000K		-MPW = Matte Powder White
			-50X = 5000K		
		-CDX = Comfort Dim			* Adjustable snoot and/or wall wash ordered in combination with adjustable beam angle

* Adjustable snoot and/or wall wash ordered in combination with BMPW will be MPW

Example: NMHIOIC-13LE4 / NMIOTL-13-NF-AAF-30X-10-MPW = Three Head Iolite Multiple Trimless, Adjustable Snoot-Adjustable Snoot-Fixed Downlight, 3000K, 1000lm / 12W per head, vMatte Powder White finish

PHOTOMETRICS

Iolite Multiple Trimless Series Fixed Downlight

Type


Project

Catalog No.

Notes

Test Information

Test Number: NTR11396
Part Number: NM10TL-11-F-40X-10-BMPW
Beam Spread: 26° Spot
Lumens: 1361lm
Wattage: 11.65W
Efficacy: 117lpw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180): 0.44
Spacing Criteria (90°-270): 0.44



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	193fc	1'-10"
6'	85.6fc	2'-10"
8'	48.2fc	3'-8"
10'	30.8fc	4'-7"
12'	21.4fc	5'-6"

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	868	63.8
0-40	1157	85
0-60	1346	98.9
0-90	1349	99.1
90-180	12	0.9
0-180	1361	100

Candela Table

Vertical Angles	Candela
0	3082
5	2821
15	1208
25	595
35	464
45	227

Test Information

Test Number: NTR11397
Part Number: NM10TL-11-F-40X-10-BMPW
Beam Spread: 38° Narrow Flood
Lumens: 1368lm
Wattage: 11.65W
Efficacy: 117lpw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180): 0.64
Spacing Criteria (90°-270): 0.64



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	127fc	2'-10"
6'	56.5fc	4'-4"
8'	31.8fc	5'-8"
10'	20.4fc	7'-1"
12'	14.1fc	8'-6"

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	867	63.4
0-40	1152	84.2
0-60	1354	99
0-90	1361	99.5
90-180	7	0.5
0-180	1368	100

Candela Table

Vertical Angles	Candela
0	2036
5	1942
15	1386
25	654
35	455
45	237

Test Information

Test Number: NTR11398
Part Number: NM10TL-11-F-40X-10-BMPW
Beam Spread: 60° Flood
Lumens: 1340lm
Wattage: 11.64W
Efficacy: 115lpw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180): 0.9
Spacing Criteria (90°-270): 0.9



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	53.8fc	4'-11"
6'	23.9fc	7'-5"
8'	13.5fc	9'-11"
10'	8.6fc	12'-5"
12'	6fc	14'-10"

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	750	55.9
0-40	1095	81.7
0-60	1323	98.7
0-90	1333	99.5
90-180	7	0.5
0-180	1340	100

Candela Table

Vertical Angles	Candela
0	1194
5	1178
15	1033
25	763
35	557
45	258

PHOTOMETRICS

Iolite Multiple Trimless Series Adjustable Snoot

Type


Project

Catalog No.

Notes

Test Information

Test Number: NTR11391
Part Number: NM10TL-11-A-40X-10-MPW
Beam Spread: 25° Spot
Lumens: 1116lm
Wattage: 11.63W
Efficacy: 96lpw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180): 0.44
Spacing Criteria (90°-270): 0.44



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	193fc	1'-10"
6'	85.8fc	2'-8"
8'	48.2fc	3'-6"
10'	30.9fc	4'-5"
12'	21.4fc	5'-4"

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	824	73.8
0-40	921	82.5
0-60	1045	93.6
0-90	1111	99.5
90-180	6	0.5
0-180	1116	100

Candela Table

Vertical Angles	Candela
0	3087
5	2834
15	1120
25	574
35	122
45	84

Test Information

Test Number: NTR11392
Part Number: NM10TL-11-A-40X-10-MPW
Beam Spread: 38° Narrow Flood
Lumens: 1096lm
Wattage: 11.62W
Efficacy: 94lpw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180): 0.6
Spacing Criteria (90°-270): 0.6



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	127fc	2'-7"
6'	56.3fc	3'-11"
8'	31.7fc	5'-2"
10'	20.3fc	6'-6"
12'	14.1fc	7'-10"

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	796	72.6
0-40	896	81.8
0-60	1023	93.3
0-90	1091	99.5
90-180	5	0.5
0-180	1096	100

Candela Table

Vertical Angles	Candela
0	2028
5	1918
15	1239
25	619
35	126
45	85

Test Information

Test Number: NTR11393
Part Number: NM10TL-11-A-40X-10-MPW
Beam Spread: 60° Flood
Lumens: 1060lm
Wattage: 11.62W
Efficacy: 91lpw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180): 0.84
Spacing Criteria (90°-270): 0.84



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	77.9fc	4'-1"
6'	34.6fc	6'-1"
8'	19.5fc	8'-1"
10'	12.5fc	10'-1"
12'	8.7fc	12'-2"

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	701	66.1
0-40	849	80.1
0-60	986	93.1
0-90	1055	99.6
90-180	5	0.4
0-180	1060	100

Candela Table

Vertical Angles	Candela
0	1246
5	1221
15	982
25	708
35	208
45	93

PHOTOMETRICS

Iolite Multiple Trimless Series

Wall Wash

Type

Project

Catalog No.

Notes

Test Information

Test Number: NTR11400R1

Part Number: NM10TL-11-W-40X-10-MPW

Lumens: 586lm

Wattage: 11.85W

Efficacy: 49lpw

CCT / CRI: 4000K / 90 CRI

Spacing Criteria (0°-180): 0.9

Spacing Criteria (90°-270): 1.28

Multiple unit data (footcandles)


	2' from wall			
	2' on center			
Distance from ceiling (ft.)				
1'	31	28	31	
2'	30	31	30	
3'	17	18	17	
4'	10	10	10	
5'	6	6	6	
6'	4	4	4	
7'	2	2	2	
8'	2	2	2	
9'	1	1	1	
10'	1	1	1	

Multiple unit data (footcandles)

	2' from wall			
	3' on center			
Distance from ceiling (ft.)				
1'	28	16	28	
2'	25	22	25	
3'	15	15	15	
4'	8	9	8	
5'	5	5	5	
6'	3	4	3	
7'	2	2	2	
8'	2	2	2	
9'	1	1	1	
10'	1	1	1	

Multiple unit data (footcandles)

	3' from wall			
	3' on center			
Distance from ceiling (ft.)				
1'	8	7	8	
2'	16	15	16	
3'	13	14	13	
4'	9	10	9	
5'	6	7	6	
6'	4	5	4	
7'	3	3	3	
8'	2	2	2	
9'	2	2	2	
10'	1	1	1	



Example: Two luminaires located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 13fc beneath and 14fc between luminaires.