

NMRT-470 Series

MR16 Multiple Lighting System Trims

Source: 20W-50W 12V MR16

NORALIGHTING.


Type

Project

Catalog No.

Lamp/Wattage

TRIM DIMENSIONS

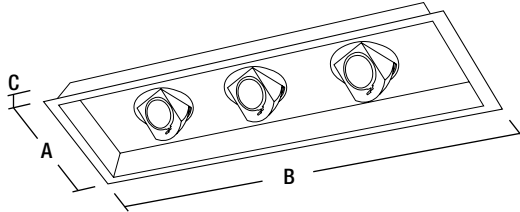


Adjustable: 90°

DIMENSIONS


CONFIGURATION

1 Row / 1 Lamp
A: Width: 9-3/4"
B: Length: 9-3/4"
C: Height: 2-1/4"




CONFIGURATION

1 Row / 2 Lamps
A: Width: 9-3/4"
B: Length: 18"
C: Height: 2-1/4"



CONFIGURATION

1 Row / 3 Lamps
A: Width: 9-3/4"
B: Length: 23-3/4"
C: Height: 2-1/4"



FEATURES

Trim

Metal trim with fully adjustable elbow can be adjusted up 358° horizontally and 90° vertically. Adjustable elbow allows lamp to be front loaded into trim.

Mounting

Trim includes two "V" torsion springs to mount trim securely to housing.

Compatible Multiple Lighting System Housings

Compatible with Low Voltage housings.

See individual specification sheets for more information.

Lamp

Low Voltage

20W-50W 12V MR16 (Ordered Separately)

Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

NMRT-470 Trim

Series	Type	#of Rows	# of Lamps	Trim	Finish
NMR	T=Trim	1=1 Row (1 to 3 Lamps only)	1=1 Lamp 2=2 Lamps 3=3 Lamps	470=MR16	BW=Black Face/White Flange SS=Silver Face/Silver Flange WW=White Face/White Flange

Create a complete MLS trim catalog number: Example: NMRT-13470SS

NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040
www.noralighting.com • Specifications subject to change without notice. © 2011
Phone: 800.686.6672 • FAX: 800.500.9955 • e-mail: nora@noralighting.com