

NMRT-628 Series

PAR30 Multiple Lighting System Trims

Source: 75W PAR30L Maximum
70W PAR30L CMH Maximum

NORALIGHTING.


Type

Project

Catalog No.

Lamp/Wattage


TRIM DIMENSIONS

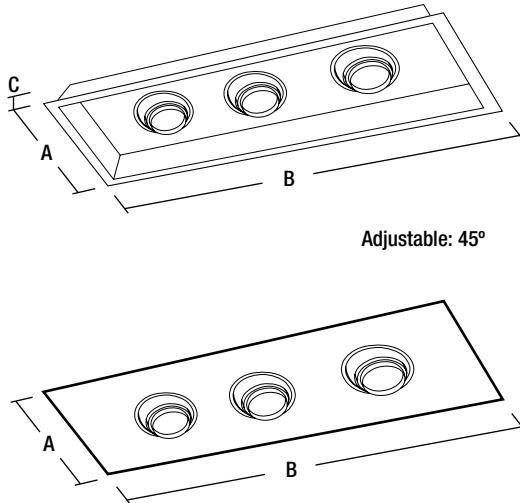

DIMENSIONS


CONFIGURATION

1 Row / 1 Lamp
A: Width: 9-3/4"
B: Length: 9-3/4"
C: Height: 2-1/4"




CONFIGURATION

1 Row / 2 Lamps
A: Width: 9-3/4"
B: Length: 18"
C: Height: 2-1/4"



CONFIGURATION

1 Row / 3 Lamps
A: Width: 9-3/4"
B: Length: 23-3/4"
C: Height: 2-1/4"



FEATURES

Trim

Adjustable metal eyeball can be adjusted up to 45°.

Mounting

Trim includes two "V" torsion springs to mount trim securely to housing.

Compatible Multiple Lighting System Housings

Compatible with Line Voltage and HID Metal Halide housings.
See individual specification sheets for more information.

Lamp

Line Voltage

75W PAR30L Maximum

HID Metal Halide

70W PAR30L CMH Maximum

Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

NMRT-628 Trim

Series	# of Rows	Face Plate	# of Lamps	Trim	Face/Flange Finish
NMRT=MLS Trim	1=1 Row (1 to 3 lamps only)	(Blank) = Regress	1=1Lamp	628=MR16	BW=Black Face, White Flange
		F = Flat	2=2lamps		SS=Silver Face, Silver Flange
			3=3Lamps		WW=White Face, White Flange

Create a complete MLS trim catalog number: Example: NMRT-13628SS

NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040
www.noralighting.com • Specifications subject to change without notice. © 2011
Phone: 800.686.6672 • FAX: 800.500.9955 • e-mail: nora@noralighting.com