

NPR-56RNDC

5"/6" Pearl LED Round Retrofit Downlight

Source: 12W LED
1200lm

PRODUCT DESCRIPTION

Pearl LED Retrofit series is cULus classified for use in existing IC or Non-IC housings manufactured by Nora and others. Retrofit luminaire delivers over 1200 lumens with deep regressed cone reflector for optimal visual cut-off.

FEATURES

- Comfort Dim (warm dimming) is available in 900lm only
- 2700K, 3000K, 3500K, 4000K @ 90+ CRI
- Field changeable optics included (Spot, Narrow Flood and Flood - installed)
- Integral dimmable driver
- Includes medium base socket adapter for easy retrofitting in 5" or 6" recessed housings
- 5-year limited warranty
- ENERGY STAR certified
- cULus classified for wet locations

SPECIFICATION

Construction: Trims are constructed of heat dissipating, die-cast aluminum. The aluminum die-cast LED heat sink is threaded to fit the reflector and transfer heat.

Mounting: Luminaire includes friction blades to mount securely to housing.

OPTICS

Three field changeable optics (spot, narrow flood and flood) are included with each LED module. Premium 22° and 26° TIR optics are also available.

Retrofit: Pearl retrofit series includes medium base screw-socket adapter (NRA-211SM) for retrofitting into existing medium base downlight housings. GU24 socket adapter is available for use with GU24 housings, must specify NRA-212SM.

ELECTRICAL

Input Voltage: 120V

Lumens / Wattage: 1200lm / 12W (900lm w/ Comfort Dim)

Color Temperature: 2700K, 3000K, 3500K, 4000K

Color Rendering Index: 90+CRI

Beam Spread: 29° Spot, 44° Narrow Flood, 61° Flood

Operating Temp.: 0°C to 25°C ambient temperature

Lifetime: 50,000 hours @ L70

Comfort Dim: Comfort Dim color tunes the temperature from a bright 3100K, to a romantic and comfortable 2000K on a gradual, even curve. Available in 900lm only.

Dimming: Triac (leading edge) or ELV (trailing edge)

[Click Here](#) or check complete dimmer list at

www.NoraLighting.com in the "Compatibility" page under "Resources" tab

COMPATIBLE HOUSINGS

Retrofit is compatible with most 5" & 6" IC and Non-IC housings by Nora and others.

Fire Box

[NFBIC-5INCATA](#)

[NFBIC-5LMRATA*](#)

[NFBIC-6INCATA](#)

[NFBIC-6LMRATA*](#)

New Construction

[NHIC-5LMRAT*](#)

[NHIC-5LMRAT/277*1](#)

[NHIC-527LMRAT*](#)

[NHIC-5010AT](#)

[NHIC-5270AT](#)

[NH-501Q](#)

[NHIC-6LMRAT*](#)

[NHIC-6LMRAT/277*1](#)

[NHICCP-6LMRAT*](#)

[NHIC-27LMRAT*](#)

[NHIC-170AT](#)

[NHIC-17QNBAT](#)

[NHIC-270AT](#)

[NH-26Q](#)

[NH-27Q](#)

[NHIC-6G24ATFL](#)

Remodel

[NHRIC-5LMRAT*](#)

[NHRIC-527LMRAT*](#)

[NHRIC-5040AT](#)

[NHRIC-5270AT](#)

[NHR-504Q](#)

[NHRIC-6LMRAT*](#)

[NHRIC-27LMRAT*](#)

[NHRIC-170AT](#)

[NHRIC-17QNBAT](#)

[NHRIC-270AT](#)

[NHR-26Q](#)

[NHR-27Q](#)

* Nora LED Dedicated housings are cULus listed for use only with Nora LED Retrofits.

¹ Housings include a step down transformer

LABELS AND LISTINGS

- cULus classified for Wet Locations
- ENERGY STAR certified
- RoHS compliant
- [5-Year Limited Warranty](#)
- Certified to the high efficacy requirements of California Title 24 JA8-2022



Type

Project

Catalog No.



Notes

Performance Data

Part Number	Lumens	CCT	Optic
NPR-56RNDC40XMPW	1218lm	4000K	Spot
NPR-56RNDC40XMPW	1225lm	4000K	Narrow
NPR-56RNDC40XMPW	1200lm	4000K	Flood

Delivered lumens will vary depending on CCT, optic and finish


PRODUCT IMAGES & DIMENSIONS



BB
Black Reflector
Black Flange



BW
Black Reflector
White Flange



CHMPW
Champagne Haze Reflector
Matte Powder White Flange



HZMPW
Haze Reflector
Matte Powder White Flange



MPW
Matte Powder White Reflector
Matte Powder White Flange



WW
White Reflector
White Flange

5"/6" Pearl LED Round Retrofit Reflector with Round Aperture

Trim Type	Color Temperature	Reflector Finish / Flange Finish
NPR-56RNDC = Round Reflector with Round Aperture	27X = 2700K	BB = Black / Black
	30X = 3000K	BW = Black / White
	35X = 3500K	CHMPW = Champagne Haze / Matte Powder White
	40X = 4000K	HZMPW = Haze / Matte Powder White
	CDX = Comfort Dim	MPW = Matte Powder White / Matte Powder White
		WW = White / White

Example: **NPR-56RNDC27XWW** = 5"/6" Pearl LED Round Retrofit Reflector with Round Aperture, 2700K, White finish

Pearl LED Retrofit Accessories


5"/6" Pearl LED Round Retrofit Downlight

Type
Project
Catalog No.
Notes

FIELD CHANGEABLE OPTICS

Pearl luminaires include spot, narrow flood and flood optics. Optics can be changed in the field by removing LED module from die-cast trim. Replacement optics include an optional frosted lens.

Note: Premium TIR optics are not compatible with Comfort Dim LED modules.

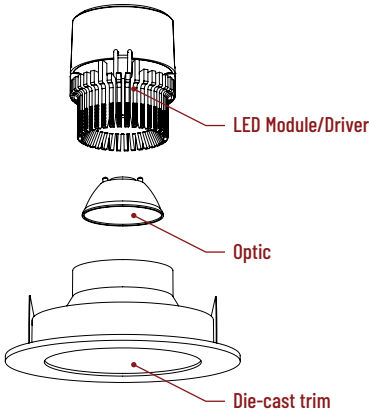

Frosted Filter-Optic

NIO-REFL38FR 60° Optic
NIO-REFL60FR 73° Optic

Replaces optics that are included with each LED module.




Premium TIR Optics

NIO-REFLTIR15 22° Optic
NIO-REFLTIR25 26° Optic

Premium TIR (total internal reflection) optics create optimal spot and narrow flood beam spread.
Not compatible with Comfort Dim (CDX) LED module

ACCESSORIES

Pearl accessories can be added at any point in the design process. Accessories easily install between LED module and die-cast trim. Luminaire will accommodate (1) hex louver and (1) collar accessory, no accessory holder required.

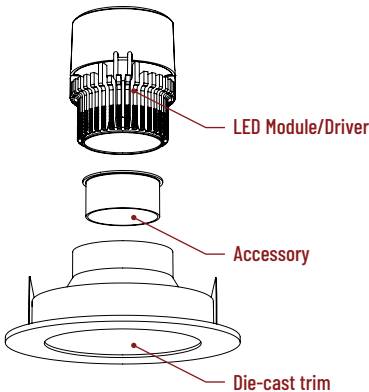

Translucent Decorative Collar

NIO-AS14(color) 5/8" length
NIO-AS19(color) 3/4" length
NIO-AS26(color) 1" length
Color:
AM (amber), BLU (blue), FR (frosted), R (red)

Translucent collars color the aperture with the specified color while producing white general light. Collars are available in different lengths. Use to add interest, create a theme, match a theme or define a space.



Opaque Collar Snoot

NIO-AS14(color) 5/8" length
NIO-AS19(color) 3/4" length
NIO-AS26(color) 1" length
Color:
MPW (matte powder white), WH (white)

Opaque snoot greatly reduces aperture brightness while preserving light output.



Hex Cell Louver

NIO-HC Black
Hex cell louver subtly reduces aperture brightness by reducing light output by about 20%.

PHOTOMETRICS

5" / 6" Pearl LED Round Retrofit Downlight

Type


Project

Catalog No.

Notes

Test Information

Test Number: NTR1885R1
Part Number: NPR-56RNDC40XWW
Beam Spread: 29° Spot
Lumens: 1218lm
Wattage: 11.89W
Efficacy: 102pw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180°): 0.48
Spacing Criteria (90°-270°): 0.48



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	177fc	2'
6'	78.7fc	3'
8'	44.2fc	4'-1"
10'	28.3fc	5'-1"
12'	19.7fc	6'-1"

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	928	76.2
0-40	1122	92.1
0-60	1194	98.1
0-90	1218	100
90-180	0	0
0-180	1218	100

Candela Table

Vertical Angles	Candela
0	2831
5	2547
15	1324
25	716
35	346
45	58

Test Information

Test Number: NTR1886R1
Part Number: NPR-56RNDC40XWW
Beam Spread: 44° Narrow Flood
Lumens: 1225lm
Wattage: 11.91W
Efficacy: 103pw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180°): 0.7
Spacing Criteria (90°-270°): 0.7



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	124fc	3'-2"
6'	55.3fc	4'-10"
8'	31.1fc	6'-5"
10'	19.9fc	8'
12'	13.8fc	9'-7"

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	932	76.1
0-40	1128	92.1
0-60	1200	98
0-90	1225	100
90-180	0	0
0-180	1225	100

Candela Table

Vertical Angles	Candela
0	1991
5	1906
15	1444
25	771
35	338
45	55

Test Information

Test Number: NTR1887R1
Part Number: NPR-56RNDC40XWW
Beam Spread: 61° Flood
Lumens: 1200lm
Wattage: 11.94W
Efficacy: 100pw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180°): 0.94
Spacing Criteria (90°-270°): 0.94



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	80.5fc	4'-8"
6'	35.8fc	7'-1"
8'	20.1fc	9'-6"
10'	12.9fc	11'-11"
12'	8.9fc	14'-2"

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	838	69.9
0-40	1089	90.8
0-60	1173	97.8
0-90	1200	100
90-180	0	0
0-180	1200	100

Candela Table

Vertical Angles	Candela
0	1287
5	1268
15	1146
25	875
35	431
45	65

Lumen Output Multipliers

Color Temperature: 2700K (0.9), 3000K (0.92), 3500K (0.97), 4000K (1.0)