


NS-38

Specular Clear Reflector for Decorative Glass

TRIM DIMENSIONS



Trim OD: 5"
Height: 2"

FEATURES

Trim

Precision spun 0.050 aluminum high grade reflector with white flange. Flange has three holes to accept stand offs included with each decorative glass. Adjustable ring allows lamp to be mounted on top of the trim and adjustable up to 15°.

Mounting

Trim includes three trim clips that securely mount trim in housing. Remove socket from plate and mount directly onto adjustable ring.

Compatible Housings

Compatible with Line Voltage and Compact Fluorescent housings. See individual specification sheets for more information.

Lamp

Line Voltage

50W R20/PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)

Compact Fluorescent

13W Quad/Triple (NS-406Q; NS-406EL; NSR-408Q; NSR-408EL)

Labels and Listings

cULus Listed for Wet Location when used with compatible housing.

Specular Clear Reflector for Decorative Glass

- NS-38BZ: Specular Clear Reflector for Decorative Glass, Bronze Ring
- NS-38C: Specular Clear Reflector for Decorative Glass, Chrome Ring
- NS-38N: Specular Clear Reflector for Decorative Glass, Natural Metal Ring
- NS-38W: Specular Clear Reflector for Decorative Glass, White Ring

Decorative Glass

- NTG-4B/80: 4" Tempered Blue Glass with 3-1/8" Open Center
- NTG-4CF: 4" Tempered Clear Glass with Frosted Center
- NTG-4FC: 4" Tempered Frosted Glass with Clear Center
- NTG-4HC: 4" Tempered Clear Glass with Frosted Center and 3-1/8" Open Center

NORALIGHTING.

Type


Project

Catalog No.


Lamp/Wattage

HOUSING DIMENSIONS


NS-401QAT

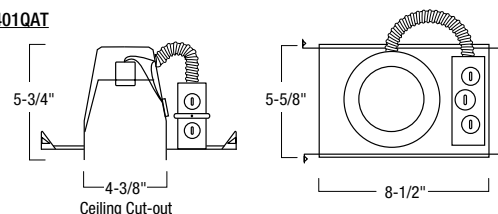


NSIC-401QAT

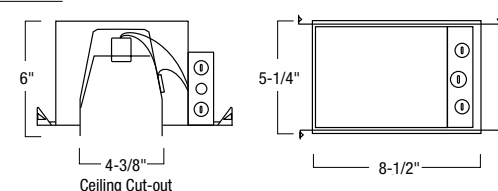


NSR-404QAT

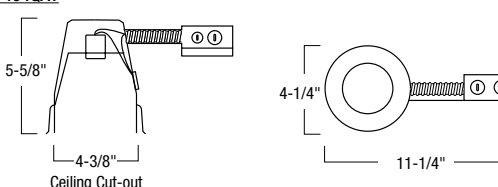

NS-406Q / NS-406EL

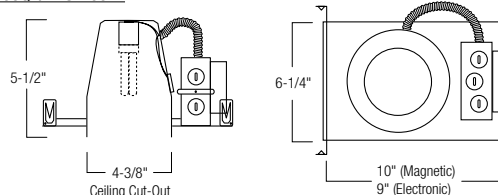

NSR-408Q / NSR-408EL

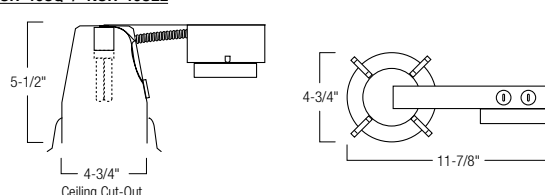

Compatible Housings

LINE VOLTAGE

Item Number	Installation Type	Lamp	Dimensions
NS-401QAT	Non-IC Air-Tight New Const.	50W R/PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
NSIC-401QAT	IC Air-Tight New Construction	50W R/PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
NSR-404QAT	Non-IC Air-Tight Remodel	50W R/PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"

COMPACT FLUORESCENT

NS-406Q	Non-IC New Constr., Magnetic	13W Quad	W: 6-1/4" L: 10" H: 5-1/2"
NS-406EL	Non-IC New Constr., Electronic	13W Quad/Triple	W: 6-1/4" L: 9" H: 5-1/2"
NSR-408Q	Non-IC Remodel, Magnetic	13W Quad	W: 4-3/4" L: 11-7/8" H: 5-1/2"
NSR-408EL	Non-IC Remodel, Electronic	13W Quad/Triple	W: 4-3/4" L: 11-7/8" H: 5-1/2"

NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040
www.noralighting.com • Specifications subject to change without notice. © 2011
Phone: 800.686.6672 • FAX: 800.500.9955 • e-mail: nora@noralighting.com