

NT-5026

5" Frosted Flat Lens with Metal Trim and Bracket

Type

Project

Catalog No.

Notes

FEATURES

Trim: High grade frosted flat lens attached to metal trim with a bracket. Bracket includes two socket positions for optimum light control and output.

Mounting: Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86).

COMPATIBLE HOUSINGS

Compatible with Line Voltage housings. See individual specification sheets for more information.

LAMP

Line Voltage:

40W A19 Maximum (NHIC-501QAT; NHRIC-504QAT)


60W A19 Maximum (NH-501Q; NHR-504Q)

LABELS AND LISTINGS

· cULus Listed for Wet Location when used with compatible housing



PRODUCT IMAGES AND DIMENSIONS

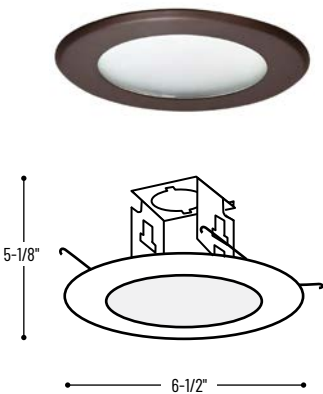

Frosted Dome Lens with Metal Trim and Bracket

Catalog No.

NT-5026BZ = Frosted Flat Lens with Bronze Metal Trim and Bracket

NT-5026C = Frosted Flat Lens with Chrome Metal Trim and Bracket

NT-5026N = Frosted Flat Lens with Natural Metal Trim and Bracket

NT-5026W = Frosted Flat Lens with White Metal Trim and Bracket

Compatible Housings

Catalog No.

NHIC-501QAT = 5" IC Air-Tight New Construction / 40W max

NHRIC-504QAT = 5" IC Air-Tight Remodel / 40W max

NH-501Q = 5" Non-IC New Construction / 60W max

NHR-504Q = 5" Non-IC Remodel / 60W max

Example: NT-5026BZ = Frosted Flat Lens with Bronze Metal Trim and Bracket