

NTE-89033

12" T-Wash Wall Wash LED Track Head

Source: 33W LED
3000lm

Type

Project

Catalog No.

Notes

PRODUCT DESCRIPTION

Die cast aluminum LED track fixture. Heavy duty yoke allows full horizontal rotation and vertical adjustment. Dual tightening knobs assure secure lock on vertical angle position. Architectural design allows venting out the back for cool operation.

FEATURES

- 3000lm / 33W LED package
- 3000K or 4000K @ 80+ CRI
- Heavy duty die cast aluminum body with die cast end caps
- Low profile, aesthetic design
- Frosted lens produces an even broadcast of light.
- Integral high efficiency solid state dimmable driver
- One or two circuit track capable
- Available in standard H-Style, J-Style or L-Style adapters
- Dimmable

CONSTRUCTION

Housing: Main body consists of die cast aluminum terminating at two .10 die cast aluminum end caps, permanently welded to fixture body.

Aiming: Fixture can be mounted anywhere along the track. 358 degree horizontal rotation and 90 degree vertical locking adjustment.

Yoke: .085 Rigid steel yoke connects fixture housing to electrical contact head. Dual Plastic angle tightening knobs maintain clean, decorative appearance of the fixture and provide secure angle position.

Lens: Includes frosted lens diffuses LED diode and provides even light distribution

ELECTRICAL

Input Voltage: 120V

Lumens / Wattage: 3000lm / 33W

Color Temperature: 3000K or 4000K

CRI: 80

Dimming: Triac or ELV

[Click Here](#) or check complete dimmer list at www.NoraLighting.com in the "Compatibility" page under "Resources" tab

One / Two Circuit Conversion: Positive contact (opposite neutral and ground contacts) is preset to "down" position at factory, but may be raised to the higher position to install onto the second circuit of Nora Lighting NT-2300 series two-circuit track.


Accessories: Luminaire can accommodate louver, no accessory holder is required.

LABELS AND LISTINGS

- cULus Listed for dry locations
- [5-Year Limited Warranty](#)



PRODUCT IMAGES AND DIMENSIONS

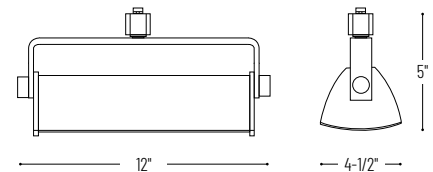

12" T-Wash Wall Wash LED Track Head

Series	Length / Lumens / Wattage	Color Temperature	Finish	Adapter Style
NTE-890	33 = 12" Yoke / 3000lm / 33W	30 = 3000K	B = Black	(blank) = H-Style
		40 = 4000K	S = Silver	/J = J-Style
			W = White	/L = L-Style

Optional Accessories

Description

- NTEL-8903B** = 12" Louver, Black
- NTEL-8903S** = 12" Louver, Silver
- NTEL-8903W** = 12" Louver, White



Example: **NTE-8903330W** = 12" T-Wash Wall Wash LED Track Head, 3000lm / 33W, 3000K, White Finish, H-Style adapter

PHOTOMETRICS

12" T-Wash Wall Wash LED Track Head

Type


Project

Catalog No.

Notes

Test Information

Test Number: 20150813-001
Part Number: NTE-8903330W
Lumens: 2803lm
Wattage: 30.5W
Efficacy: 92lpw
CCT / CRI: 3000K / 80 CRI
Spacing Criteria (0°-180°): 1.14
Spacing Criteria (90°-270°): 1.18



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	76.2fc	8"-4"
6'	33.9fc	12'-5"
8'	19.1fc	16'-7"
10'	12.2fc	20'-8"
12'	8.5fc	24'-10"

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	907	32.4
0-40	1437	51.3
0-60	2358	84.1
0-90	2803	100
90-180	0	0
0-180	2803	100

Candela Table

Vertical Angles	Candela
0	1220
5	1210
15	1139
25	1002
35	819
45	619