

NTM-300
6" BR/PAR30 Open Trim with Bracket

Type

Project

Catalog No.

Notes

FEATURES

Trim: Metal trim with 3-1/2" open center and bracket.

Mounting: Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86). Remove socket from socket plate within housing (if applicable), and mount socket on bracket.

COMPATIBLE HOUSINGS

Compatible with line voltage housings. See individual specification sheets for more information.

LAMP

Line Voltage:




75W BR/PAR30 Maximum (NFBIC-6INCATA ; NH-26Q; NH-26QNB; NH-27Q; NHIC-17/100DWQA; NHIC-17QAT; NHIC-17QNBAT; NHIC-27QAT; NHR-26Q; NHR-27Q; NHRIC-17QAT; NHRIC-17QNBAT; NHRIC-27QAT)

LABELS AND LISTINGS

cULus Listed for Damp Location when used with compatible housing.



PRODUCT IMAGES AND DIMENSIONS

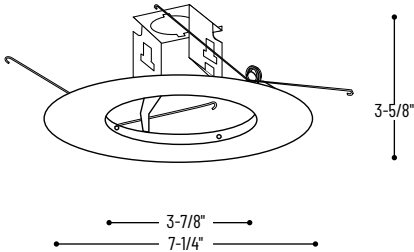

6" BR/PAR30 Open Trim with Bracket

Catalog No.
NTM-300B = 6" BR/PAR30 Open Trim with Bracket, Black finish
NTM-300BZ = 6" BR/PAR30 Open Trim with Bracket, Bronze finish
NTM-300W = 6" BR/PAR30 Open Trim with Bracket, White finish

Compatible Housings

Catalog No.
NFBIC-6INCATA = 2-Hour Fire Rated New Construction / 75W max.
NHIC-17/100DWQA = IC Air-Tight Double Wall New Construction / 75W max.
NHIC-17QAT = IC Air-Tight New Construction / 75W max.
NHIC-17QNBAT = IC Air-Tight New Construction, No Bracket / 75W max.
NHRIC-17QAT = IC Air-Tight Remodel / 75W max.
NHRIC-17QNBAT = IC Air-Tight Remodel, No Bracket / 75W max.
NH-26Q = Non-IC New Construction / 75W max.
NH-26QNB = Non-IC New Construction, No Bracket / 75W max.
NHR-26Q = Non-IC Remodel / 75W max.
NH-27Q = Non-IC Shallow New Construction Housing / 75W Max
NHR-27Q = Non-IC Shallow Remodel / 75W Max
NHIC-27QAT = ICAT Shallow New Construction / 75W Max
NHRIC-27QAT = ICAT Shallow Remodel / 75W Max

Example: NTM-300W = 6" BR/PAR30 Open Trim with Bracket, White finish