

NP-322 / NTM-322

6" Albalite Lens with Trim and Bracket

Type

Project

Catalog No.

Notes

FEATURES

Trim: High grade albalite lens attached to a trim with a bracket.

Mounting: Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86). Remove socket from socket plate within housing (if applicable), and mount socket on bracket.

COMPATIBLE LAMP / HOUSINGS

Line Voltage:

25W A19 Max. (NHIC-27QAT; NHRIC-27QAT)

40W A19 Max. (NHIC-17QAT; NHIC-17QNBAT; NHRIC-17QAT; NHRIC-17QNBAT)

60W A19 Maximum (NH-26Q; NH-26QNB; NH-27Q; NHIC-17/100DWQA; NHR-26Q; NHR-27Q)


See individual housing specification sheets for more information.

LABELS AND LISTINGS

* cULus Listed for Wet Location when used with compatible housing



PRODUCT IMAGES & DIMENSIONS

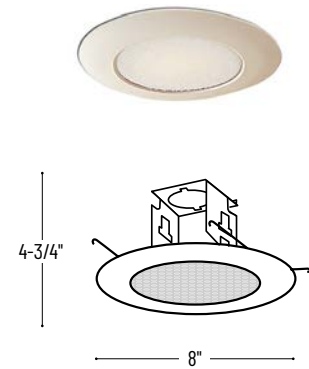

6" Albalite Lens with Trim and Bracket

Catalog No.

NP-322 = 6" Albalite Lens with White Plastic Trim and Bracket

NTM-322W = 6" Albalite Lens with White Metal Trim and Bracket

Compatible Housings

Catalog No.

NH-26Q = Non-IC New Construction / 60W max

NHR-26Q = Non-IC Remodel / 60W max

NH-26QNB = Non-IC New Construction No Bracket / 60W max

NHIC-17/100DWQA = IC Air-Tight Double Wall New Construction / 60W max

NHIC-17QAT = IC Air-Tight New Construction / 40W max

NHIC-17QNBAT = IC Air-Tight New Construction No Bracket / 40W max

NHRIC-17QAT = IC Air-Tight Remodel / 40W max

NHRIC-17QNBAT = IC Air-Tight Remodel No Bracket / 40W max

NH-27Q = Shallow Non-IC New Construction / 60W max

NHR-27Q = Shallow Non-IC Remodel / 60W max

NHIC-27QAT = Shallow IC Air-Tight New Construction / 25W max

NHRIC-27QAT = Shallow IC Air-Tight Remodel / 25W max

Example: **NP-322** = 6" Albalite Lens with White Plastic Trim and Bracket