

NTM-323 / NP-323  
6" Fresnel Lens with Trim and Bracket

Type

Project

Catalog No.

Notes

FEATURES

**Trim:** High grade fresnel lens attached to a metal trim with a bracket.

**Mounting:** Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86). Remove socket from socket plate within housing (if applicable), and mount lamp into gimbal ring.

COMPATIBLE HOUSINGS

Compatible with line voltage housings. See individual specification sheets for more information.

LAMP


- 25W A19 Max. (NHIC-27QAT; NHRIC-27QAT)
- 40W A19 Max. (NHIC-17QAT; NHIC-17QNBAT; NHRIC-17QAT; NHRIC-17QNBAT)
- 60W A19 Maximum (NH-26Q; NH-26QNB; NH-27Q; NHIC-17/100DWQA; NHR-26Q; NHR-27Q)

LABELS AND LISTINGS

- cULus Listed for Wet Location when used with compatible housing.



PRODUCT IMAGES AND DIMENSIONS

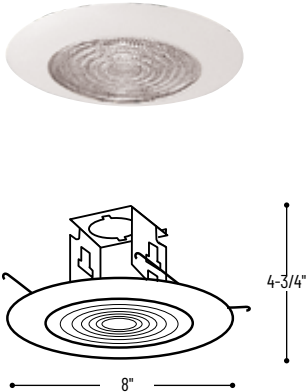

6" Fresnel Lens with Trim and Bracket

Catalog No.

- NP-332** = 6" Fresnel Lens with White Plastic Trim and Bracket
- NTM-323N** = 6" Fresnel Lens with Natural Metal Trim and Bracket
- NTM-323W** = 6" Fresnel Lens with White Metal Trim and Bracket

Compatible Housings

Catalog No.

- NHIC-27QAT** = IC Air-Tight Shallow New Construction / 25W max
- NHRIC-27QAT** = IC Air-Tight Shallow Remodel / 25W max
- NHIC-17QAT** = IC Air-Tight New Construction / 40W
- NHIC-17QNBAT** = 6" IC Air-Tight New Construction, No Bracket / 40W
- NHRIC-17QAT** = IC Air-Tight Line Voltage Remodel / 40W max
- NHRIC-17QNBAT** = IC Air-Tight Remodel, No Bracket / 40W max
- NH-26Q** = Non-IC New Construction / 60W max
- NH-26QNB** = Non-IC New Construction, No Bracket / 60W max
- NH-27Q** = Non-IC Shallow New Construction / 60W max
- NHIC-17/100DWQA** = IC Air-Tight Double Wall New Construction / 60W max
- NHR-26Q** = Non-IC Remodel / 60W max
- NHR-27Q** = 6" Non-IC Shallow Remodel / 60W max

Example: **NTM-323W** = 6" Fresnel Lens with White Metal Trim and Bracket