

NTM-55

6" PAR38 Stepped Baffle with Adjustable Gimbal

Type

Project

Catalog No.

Notes

FEATURES

Trim: Precision spun 0.040 baffle with deep grooves to reduce aperture glare. Metal trim with gimbal ring can be adjusted up to 20°. Separate trim ring available in plastic or metal, may also be used with custom combination of ring finishes.

Mounting: Trim includes three trim clips to mount trim securely to housing. Lamp mounts directly on trim.

COMPATIBLE HOUSINGS

Compatible with Line Voltage housings. See individual specification sheets for more information.

LAMP

Line Voltage:


- 90W PAR38 Maximum (NFBIC-6INCATA)
- 100W PAR38 Maximum (NHIC-17/100DWQA; NHIC-17QAT; NHIC-17QNBAT; NHRIC-17QAT; NHRIC-17QNBAT)
- 150W PAR38 Maximum (NH-26Q; NH-26QNB; NHR-26Q)

LABELS AND LISTINGS

cULus Listed for Damp Location when used with compatible housing.



PRODUCT IMAGES AND DIMENSIONS

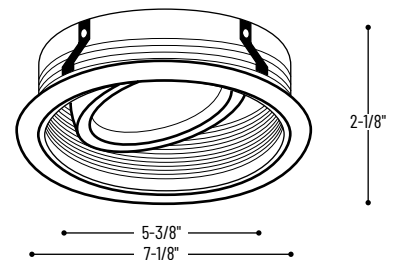

6" PAR38 Stepped Baffle with Adjustable Gimbal

Catalog No.

NTM-55B = 6" PAR38 Black Stepped Baffle with Adjustable Gimbal, White Ring

NTM-55W = 6" PAR38 Black Stepped Baffle with Adjustable Gimbal, White Ring

Compatible Housings

Catalog No.

NFBIC-6INCATA = 2-Hour Fire Rated New Construction / 90W max.

NHIC-17/100DWQA = IC Air-Tight Double Wall New Construction / 100W max.

NHIC-17QAT = IC Air-Tight New Construction / 100W max.

NHIC-17QNBAT = IC Air-Tight New Construction, No Bracket / 100W max.

NHRIC-17QAT = IC Air-Tight Remodel / 100W max.

NHRIC-17QNBAT = IC Air-Tight Remodel, No Bracket / 100W max.

NH-26Q = Non-IC New Construction / 150W max.

NH-26QNB = Non-IC New Construction, No Bracket / 150W max.

NHR-26Q = Non-IC Remodel / 150W max.

Example: **NTM-55B** = 6" PAR38 Black Stepped Baffle with Adjustable Gimbal, White Ring