

LINEAR STRIP LIGHTS SLST4-5CCT+W | SLST4-5CCT+WMS



WARNING

WARNING — THE INSTALLATION MUST BE CARRIED OUT BY A QUALIFIED ELECTRICIAN.


- Please keep the LED Linear Strip Lights away from any corrosive substance, and please use dry cloth when you clean it
- Before installation or maintenance, please disconnect the power to prevent electric shock

CAUTION


PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.

- Electrical products can cause death or injury, or damage to property.
- If in any doubt about the installation or use of this product, consult a competent electrician.


SUSPENDING INSTALLATION

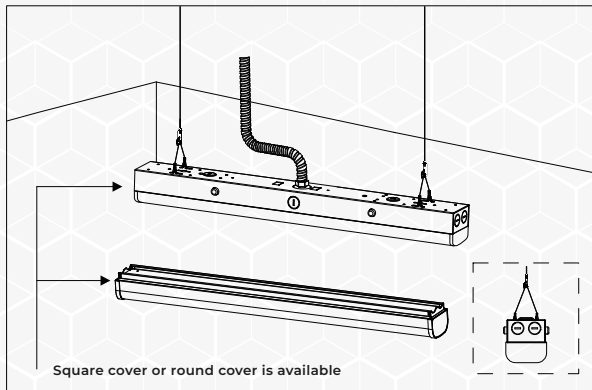


1. Fixing the hook and suspending the lamp.

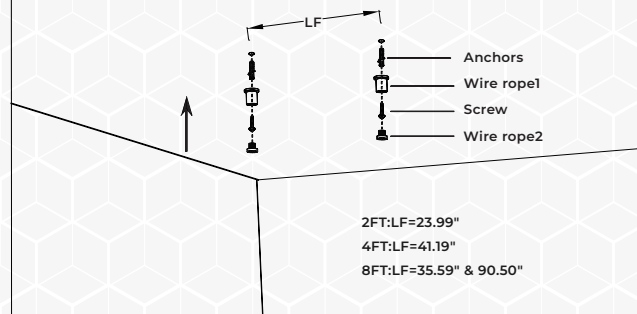

2. Adjusting the hanging rope length.

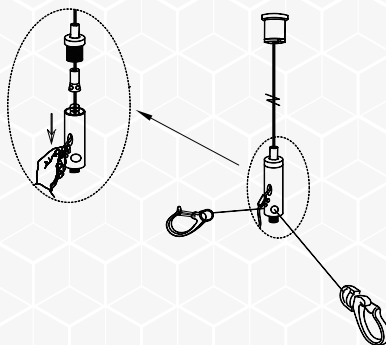

3. Adjusting the hanging rope making the LED strip in a horizontal state.

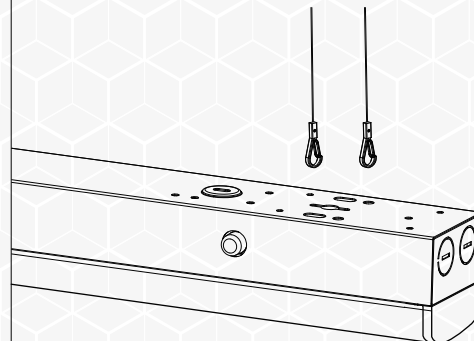


ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.




LINEAR STRIP LIGHTS SLST4-5CCT+W | SLST4-5CCT+WMS

SUSPENDING INSTALLATION


4. Turn off the power and wiring by using wire nuts.

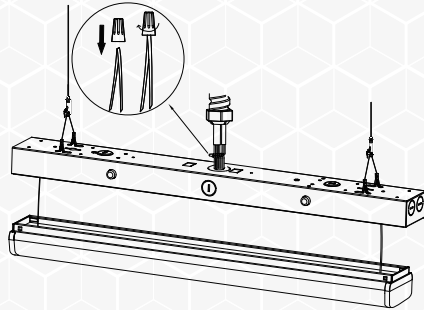


To Source
AC120V-277V
AC120V-347V




5. Insert the terminal block and wires into the lamp housing.

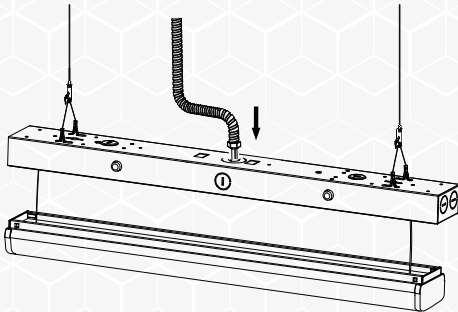


6. Press upward the cover and lock it.

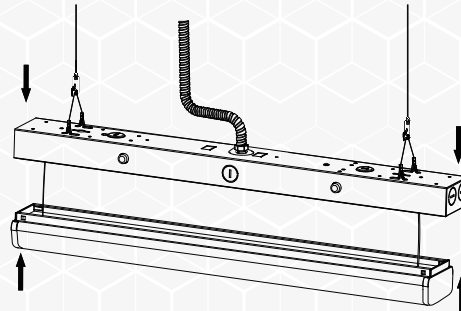

7. The installation completed.

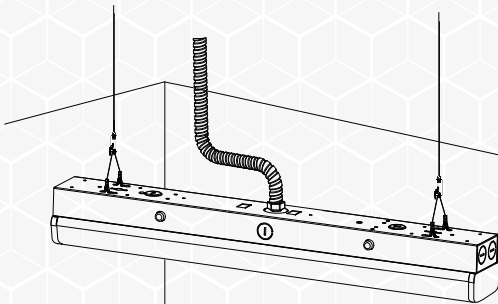


8. Press the buckle on both sides and remove, if you need to remove the cover.

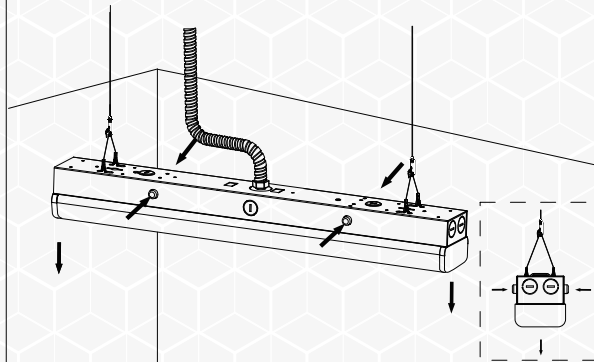


LINEAR STRIP LIGHTS SLST4-5CCT+W | SLST4-5CCT+WMS

SURFACE MOUNTED INSTALLATION

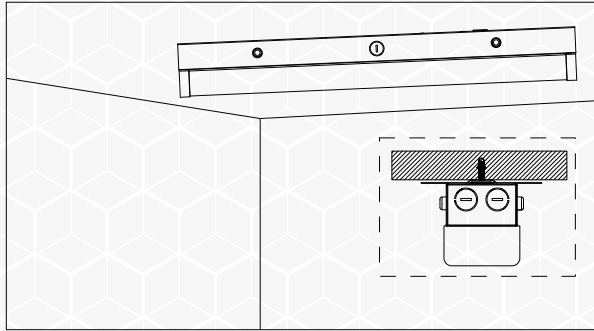


1. Punch a hole on the wall and put the expansion tube inside.

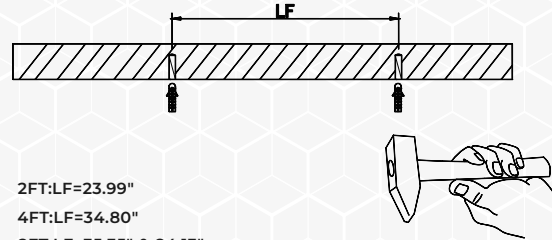


2FT:LF=23.99"
4FT:LF=34.80"
8FT:LF=35.35" & 84.13"


2. Turn off the power and wiring by using wire nuts.

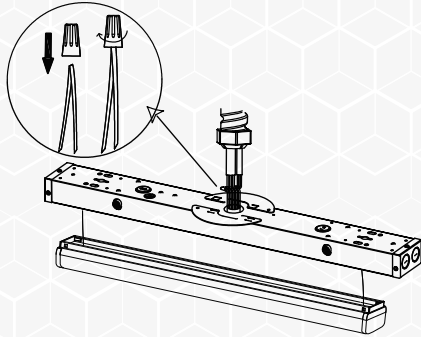


To Source
AC120V-277V
AC120V-347V

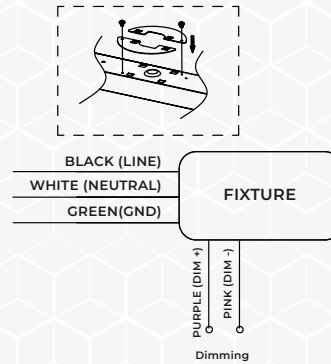


3. Secure the fixture on the wall and lock it in tight.

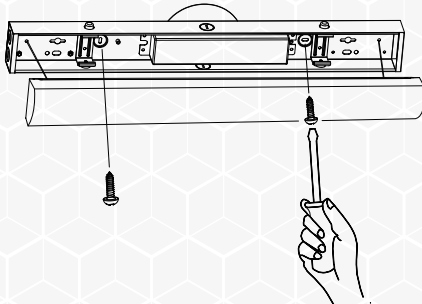


4. Press upward the cover and lock it with springs tightly which located into the fixture.

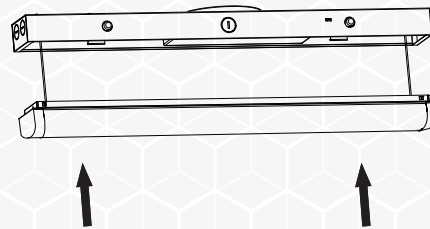

5. The installation completed.

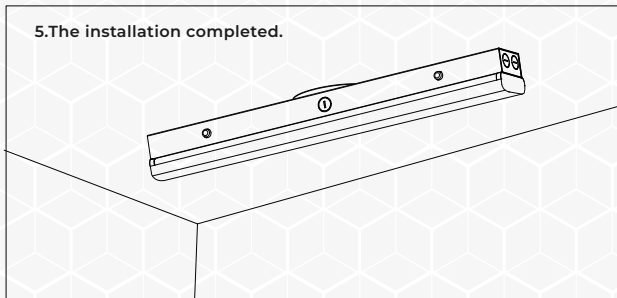

6. Press the buckle on both sides and remove, if you need to disassemble the cover.

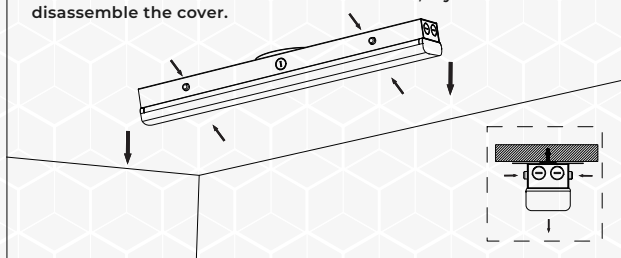

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.