

4" SLIM LIGHTS DISC4DGR-5CCT



HIGHLIGHTS

4" Round Regress Anti-glare Slim Gimbal Light With Selectable CCT

- Does **NOT** include the driver/transformer in packaging
- Intended to be used in conjunction with a 0-10v driver **OT-010-DGR4**
- No housing required - Type IC, air tight & wet location rated
- Easy & fast installation - install directly into ceiling with clips
- 38° wide beam with 30° tilt and 360° rotation

12W

120V AC

900 LMN

80 CRI

CERTIFICATIONS



COLOUR TEMPERATURE

2700K / 3000K / 3500K / 4000K / 5000K (Selectable)




SPECIFICATIONS

MODEL	DISC4DGR-5CCT
Wattage	15W
Voltage	120V AC, 60Hz
Lumens	900 lmn
Beam Angle	38°
Lifetime	50,000 hours
Dimmable	Yes (TRIAC dimming)
CRI	80Ra
Rating	IC rated/Indoor use/ Wet Location
Grade of Protection	IP44
Cutout	Ø4-1/4" (108mm)
Operating Temperature	-20°C ~ +40°C
Case Quantities	18

**ELEVATE
YOUR
LIGHTING
GAME**

5 YEAR WARRANTY

DIMENSIONS

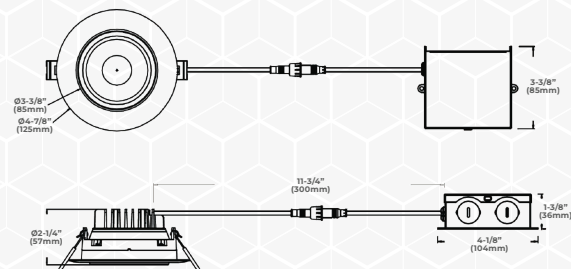

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.



4" SLIM LIGHTS DISC4DGR-5CCT

INCLUDED IN BOX

- 4" Regress Gimbal Light with Remote Driver



AVAILABLE FINISHES

WHITE



BLACK



ACCESSORIES (SOLD SEPARATELY)



CORD-24 | 60 | 120 | 240
Extension Cord




PLATE13-4 | PLATE13-4-L | PLATE26-4 | PLATE26-4-L
Construction plate made up of galvanized steel for recessed lighting




PLATE4-HB
Galvanized steel mounting plate with hanger bars



OT-010-DGR4
0-10V Class 2 LED Driver



REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

