

FLUSH MOUNTS

FM2-5-5CCT | FM2-7-5CCT | FM2-12-5CCT



HIGHLIGHTS

5", 7" And 12" Solid Built IP65 Weatherproof Flush Mount with Adjustable 5 CCT

- UV-Rated PC (polycarbonate) lens prevents damage to diffuser due to exposure to sun over time, guaranteeing long-lasting brightness
- Edge-lit technology, no glare or dark spots, instant-on, light weight
- Suitable for installation on most standard junction boxes



120°



120V AC



WEATHERPROOF



90 CRI

CERTIFICATIONS



COLOUR TEMPERATURE

2700K / 3000K / 3500K / 4000K / 5000K (Selectable)




SPECIFICATIONS

MODEL	FM2-5-5CCT	FM2-7-5CCT	FM2-12-5CCT
Wattage	10W	15W	22W
Voltage	120V AC, 60Hz	120V AC, 60Hz	120V AC, 60Hz
Lumens	800 lmn	1200 lmn	1700 lmn
Beam Angle	120°	120°	120°
Lifetime	50,000 hours	50,000 hours	50,000 hours
Dimmable	Yes	Yes	Yes
Grade Of Protection	IP65	IP65	IP65
CRI	90	90	90
Diffuser/Lens Material	PC	PC	PC
Rating	IC rated/Wet location/ Outdoor use	IC rated/Wet location/ Outdoor use	IC rated/Wet location/ Outdoor use
Operating Temperature	-20°C ~ +40°C	-20°C ~ +40°C	-20°C ~ +40°C
Application	Corridors/Lobbies/Kitchens/ Bathrooms / Bedrooms	Corridors/Lobbies/Kitchens/ Bathrooms / Bedrooms	Corridors/Lobbies/Kitchens/ Bathrooms / Bedrooms

**FLAT-OUT
FABULOUS
CEILING
PERFECTION**

5 YEAR WARRANTY

DIMENSIONS

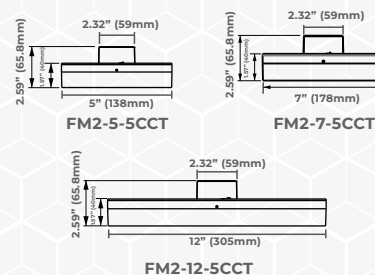

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.




FLUSH MOUNTS

FM2-5-5CCT | FM2-7-5CCT | FM2-12-5CCT




INSTALLATION

FM2-5-5CCT
FM2-7-5CCT

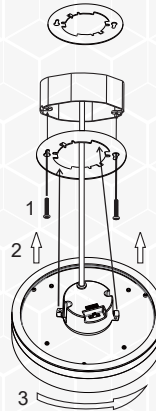

FM2-12-5CCT

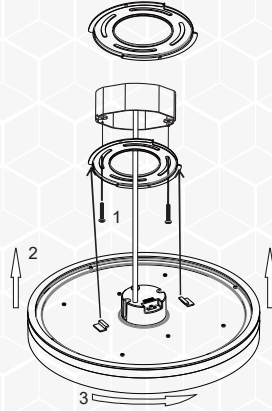

AVAILABLE FINISHES



(Chrome finish available on special request basis only -
please inquire for more info on special pricing & lead times)

INCLUDED IN BOX

- 1 x (5", 7" & 12") Surface mount LED fixture
- Two Mounting Screws
- Three Wire Nuts
- 1 mounting bracket



ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

