

4" SLIM LIGHTS SLIM4TRG-5CCT



HIGHLIGHTS

4" LED Regressed Gimbal Downlight - Compact, Adjustable Lighting With Sleek Design And Selectable CCT

- Durable aluminum body with adjustable gimbal
- Simple snap-in installation is fast and easy
- No housing required
- 30° tilting, 360° rotation
- Compatible with industry standard TRIAC/ELV dimmers (100-10%)
- Suitable for WET LOCATION

14W

120V AC

1200 LMN

90Ra CRI

CERTIFICATIONS



COLOUR TEMPERATURE

2700K / 3000K / 3500K / 4000K / 5000K (Selectable)




SPECIFICATIONS

MODEL	SLIM4TRG-5CCT
Wattage	14W
Voltage	120V AC, 60Hz
Lumens	1200 lmn
Beam Angle	38°
Lifetime	50,000 hours
Dimmable	Yes (TRIAC dimming)
CRI	90Ra
Rating	IC rated/Indoor use/ Wet Location
Grade of Protection	IP54
Cutout	Ø4-1/4" (108mm)
Operating Temperature	-20°C ~ +40°C

ELEVATE
YOUR
LIGHTING
GAME

5 YEAR WARRANTY

DIMENSIONS

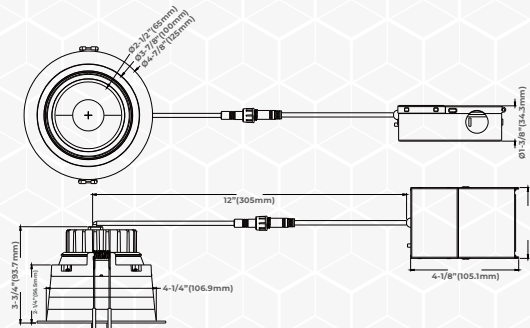

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.



4" SLIM LIGHTS SLIM4TRG-5CCT

COLOUR OPTIONS




White



Black



CUT HOLE SIZE

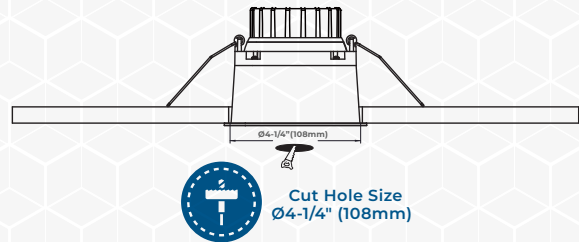

INCLUDED IN BOX

- 1 x 4" Regressed Gimbal Downlight with Remote Driver



ACCESSORIES (SOLD SEPARATELY)



CORD-B24 | CORD-B120
Extension Cord




PLATE13-4A | PLATE13-4A-L | PLATE26-4A | PLATE26-4A-L
Construction plate made up of galvanized steel for recessed lighting




PLATE4A-HB
Galvanized steel mounting plate with hanger bars



REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

