

MODEL SLIM 6ID-3.22K (Dim to Warm) / 5.40K WH

HIGHLIGHTS

- Indirect 6" round LED with driver in connection box
- Suitable for damp locations where directly not exposed to rain or snow
- Round, durable aluminum body
- Includes two spring loaded clips to attach to any ceiling material
- The slim profile allows to be mounted under joists or duct work




SPECIFICATIONS

- **Wattage:** 12W
- **Voltage:** 120V
- **Lumens:** 700 lmn
- **Beam Angle:** 110°
- **Lifetime:** 50000 hours
- **Cutout:** 160 mm
- **Dimmable:** Yes,
Dimmable up to 90% with most household dimmers
- **Colour Temp.:** 3.22K (from 3000K to 2200K)
5.40K (from 5000K to 4000K)
- **Dimensions:** 170 mm x 170 mm x 51 mm

Ordering Guide



Colour Temp.:
3.22K (Dim to Warm)
From 3K to 2.2K
5.40K
From 5K to 4K

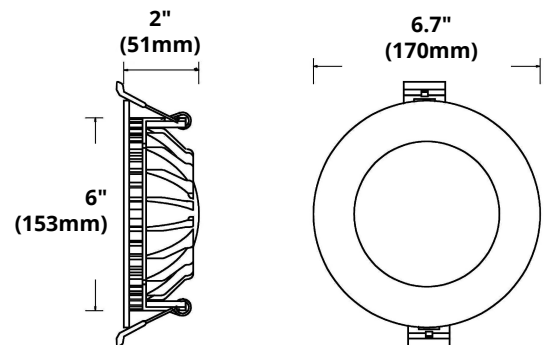

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: