




FPH-Series Surface Mount Kit for Flat Panel Hybrid Fixtures

FPH-14SMK1 | FPH-22SMK1 | FPH-24SMK1

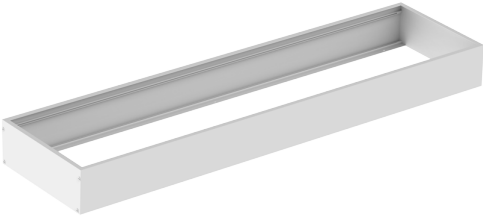

WHAT'S IN THE BOX

- SURFACE MOUNT KIT
- ASSEMBLY SCREWS
- ANCHORING SCREWS

WHAT YOU'LL NEED (NOT INCLUDED)

- WIRING SUPPLIES AS SPECIFIED BY CODE
- FPH-SERIES HYBRID FLAT PANEL FIXTURE

IMPORTANT

Before assembling, please make sure that you carefully read through this instruction sheet.

WARNING

- These instructions do not intend to cover all variations in installation, operation, maintenance or mounting situation.
- Make sure that the power is turned OFF before installing or servicing this fixture.
- Do not mount near flammable materials or electric heaters.
- Do not let power supply cords touch hot surface.
- Fixture is for indoor and dry location. NOT use for outdoor location.
- The fixture shall be installed or maintained by qualified electrician or person who is familiar with the fixture.

TO INSTALL THE SURFACE MOUNT KIT

1. Position 3 sides of the surface mount kit together. Ensure that you use two sides that have the mounting holes and one without mounting holes.
2. Using the assembly screws, secure the three sides together to form a frame, with the sides that have mounting holes positioned on the left and right, and the side without mounting holes positioned at the back.
3. Mount the three-sided frame onto the ceiling/wall using anchoring screws.
4. Make the appropriate wire connections to connect the fixture (refer to the wiring diagram in the fixture installation sheet).
5. Insert the FPH Hybrid Flat Panel fixture into the grooves of the frame. Ensure that the panel is inserted "power supply-side first", so that the frame does not interfere with the power supply box.
6. Attach the fourth side to the frame with assembly screws. Tighten until snug. Installation is now complete.

