



Project	
Date	
Prepared by	
Model #	FL4-4504T4-1

FL4-SERIES AREA LIGHT



OVERVIEW

The FL4-Series Area Light represents our entry into specification grade exterior lighting. Finished in black, its sleek design and larger housing size provides an attractive look, especially when mounted on poles. Offering a wide range of mounting options, lumen packages, IES beam distribution patterns, and integrated controls, they will allow you to achieve any design requirement.

PRODUCT HIGHLIGHTS

- Interchangeable mounting options to adapt to any application: mounting arm, yoke, trunnion or slip fitter*
- Operates in -40°F/-40°C degree outdoor weather
- 1-10V dimming for maximum control and energy savings
- IP65 and Wet Location rated
- Black contemporary finish to complement all outdoor environments
- Available with integrated motion sensor or photocell (optional)

*Fixture does not include mount. Mount must be ordered separately.




OPTICAL SPECIFICATIONS

Lumen Output (lm) ₁	61183 lm	Beam Angle (°) ₁	Type IV (150°x95°)
CCT (K) ₁	4000K	Projected Lifetime (L ₇₀)	50,000 hrs]
CRI (Ra) ₁	80	Chromaticity Shift	±250K
Efficacy (lm/W) ₁	135 lm/W		

ELECTRICAL SPECIFICATIONS

Power	450W	Replacement For	Up to 1000W HID or HPS/MH
Apparent Power (VA)	452.3VA	Current Draw at 120V _{AC} (A) ₂	3.8A
System Wattage (W)	451.43W	Current Draw at 208V _{AC} (A) ₂	2.1A
Input Voltage	100-277VAC	Current Draw at 240V _{AC} (A) ₂	1.9A
Output Voltage (VDC)	56VDC	Current Draw at 277V _{AC} (A) ₂	1.65A

PRODUCT DIMENSIONS

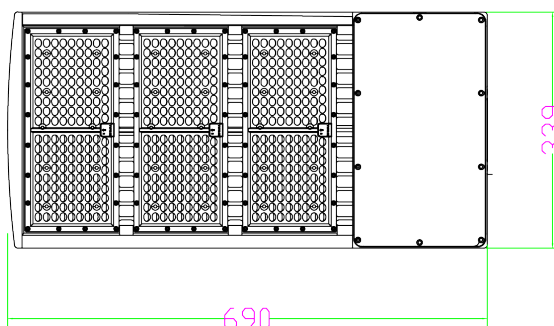

CONSTRUCTION

Housing Material	Aluminum Alloy	Installation Method	Wall Mounted/ Square Pole Mounted/ Round Pole Mounted
Housing Color	Black	Operation Range (°F/°C)	-40°F to 113°F/-40°C to 45°C
Lens Material	Polycarbonate	Weight (Kg/Lbs)	13.2kg / 29.1lbs
Dimensions (inch/mm)	27.2" x 13.3" x 3.7" / 690mm x 339mm x 95mm	Warranty	10 Years


APPROVALS AND LISTINGS

DLC Premium	P7PECLH0	IP Rating	IP65
Wet Location Rated	Yes	EPA Rating	2.57ft²
UL/ETL	cETLus	BUG Rating	B5-U3-G5

LED AND DRIVER SPECIFICATIONS

LED Type	3030	Surge Protection	L/N-PE: 10KV, L-N: 6KV
Dimmable	Yes (1-10V)	Inrush Current (A)	50A
Power Factor	0.9	Driver Class	Class 2
THD	15%		

PHOTOMETRICS

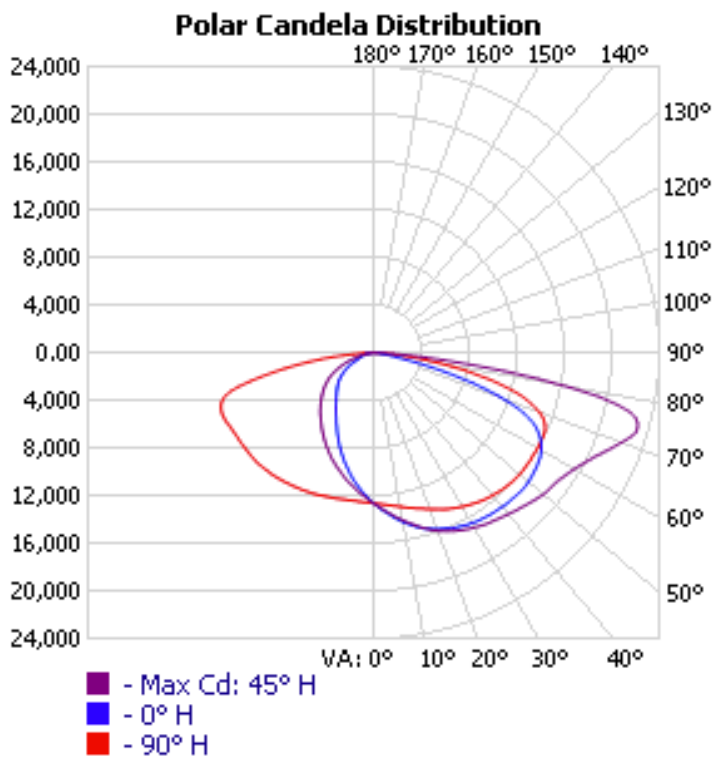

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	10,632.1	17.4%	17.4%
0-40	18,403.9	30.1%	30.1%
0-60	38,404.0	62.8%	62.8%
60-90	22,546.6	36.9%	36.9%
70-100	11,331.7	18.5%	18.5%
90-120	121.9	0.2%	0.2%
0-90	60,950.5	99.6%	99.6%
90-180	231.4	0.4%	0.4%
0-180	61,181.9	100%	100%

LCS TABLE

BUG RATING	B5 - U3 - G5
FORWARD LIGHT	LUMENS LUMENS %
LOW(0-30):	6,290.3 10.3%
MEDIUM(30-60):	19,007.5 31.1%
HIGH(60-80):	16,067.1 26.3%
VERY HIGH(80-90):	1,615.9 2.6%
BACK LIGHT	LUMENS LUMENS %
LOW(0-30):	4,341.6 7.1%
MEDIUM(30-60):	8,768.9 14.3%
HIGH(60-80):	4,492.2 7.3%
VERY HIGH(80-90):	368.8 0.6%
UPLIGHT	LUMENS LUMENS %
LOW(90-100):	45.2 0.1%
HIGH(100-180):	186.2 0.3%
TRAPPED LIGHT:	0.007 0%

ILLUMINANCE AT A DISTANCE

	CENTER BEAM	BEAM SPREAD(FT)	FIELD SPREAD(FT)		
HEIGHT(FT)	FOOTCANDLE	HORIZONTAL VERTICAL	HORIZONTAL VERTICAL		
4.00	789.78 FC	14.5 9.3	30.9 27.9		
8.00	197.45 FC	28.9 18.6	61.8 55.7		
12.00	87.75 FC	43.4 27.9	92.6 83.6		
16.00	49.36 FC	57.9 37.3	123.5 111.4		
20.00	31.59 FC	72.3 46.6	154.4 139.3		
		BEAM ANGLE	FIELD ANGLE		
		122.1° 98.7°	150.9° 147.9°		

MOUNTING OPTIONS



FL-MA4

Mounting Arm for FL4-Series
Area/Flood Lights

ACCESSORIES



PC1-TPT-1

Stem Mount Swivel Photocell
(Compatible with Mounting Arm
or Slip Fitter option only)



FL-SHIELD34

Glare Shield for FL4-Series
Area/Flood Lights (450W models
only)

PRODUCT KEY

FL4	-				-		-		Adds
Product Series			CCT		Voltage				
			☐ 4 - 4000K		☐ 1 - 100-277V ☐ 2 - 277-480V				
		Wattage		LENS					
		☐ 80 ☐ 100 ☐ 150 ☐ 200 ☐ 240 ☐ 300 ☐ 450		☐ T3 - Type III Distribution ☐ T4 - Type IV Distribution ☐ T5 - Type V Distribution					

Example
FL4-2404T3-1-M6P1

FACTORY INSTALLED ADDERS

Motion Sensor Adders

☐ M6 Microwave Motion Sensor, Dimmable, 120-277V (80W-300W models)
☐ M7 Microwave Motion Sensor, Dimmable, 120-277V (450W model)

Photocell Sensor Adders

☐ P1 Stem Mount Photocell, 120V (Mounting Arm and Slip Fitter Only)

1. Due to the special conditions of manufacturing, the typical data of optical specifications can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.
2. Exceeding maximum ratings for input voltage and current will cause hazardous overload and will likely destroy the LED fixture.
3. Refer to Warranty Terms & Conditions available at premiseled.com/warranty