



Project	
Date	
Prepared by	
Model #	FP6-2230P40-3

FP6-SERIES PREMIUM FLAT PANELS



OVERVIEW

The FP6-Series Premium Flat Panels use a universal input voltage to work with 100-347 VAC and a higher efficacy to meet DLC Premium requirements. They are the perfect replacement for traditional fluorescent lighting found in offices, hospitals, and schools.

PRODUCT HIGHLIGHTS

- DLC Premium
- Universal Voltage (works with 100-347 VAC)
- 0-10 V dimmer driver
- PMMA Light Guide Plate (No Yellowing!)
- Excellent light transmittance and uniformity
- Slim profile, 10 mm thin
- Designed to easily fit into existing suspended T-bar ceilings (aircraft cable or surface-mount kit installation methods are available as optional accessories)


OPTICAL SPECIFICATIONS

Lumen Output (lm) ₁	3979	Beam Angle (°) ₁	120°
CCT (K) ₁	4000K	Projected Lifetime (L ₇₀)	>60,000
CRI (Ra) ₁	82.5	Chromaticity Shift	±54
Efficacy (lm/W) ₁	126 lm/W		



ELECTRICAL SPECIFICATIONS

Power	30W	Current Draw at 120V _{AC} (A) ₂	0.256
Apparent Power (VA)	29.7VA	Current Draw at 208V _{AC} (A) ₂	0.150
System Wattage (W)	31.56W	Current Draw at 240V _{AC} (A) ₂	0.133
Input Voltage	100-347 V	Current Draw at 277V _{AC} (A) ₂	0.118
Replacement For	2 Lamp 32W T8 U-Bent	Current Draw at 347V _{AC} (A) ₂	0.100

PRODUCT DIMENSION

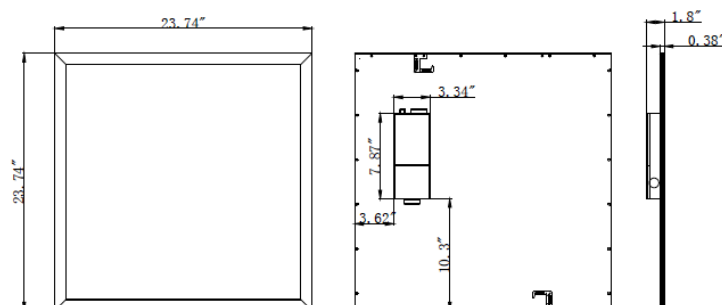

CONSTRUCTION		LED AND DRIVER SPECIFICATIONS	
Housing Material	Powder Coated Aluminum Frame with Galvanized Steel Back Plate	LED (Brand)	Jufei
Housing Color	White	LED Design Origin	China
Light Guide Plate	PMMA	LED Type	SMD4014
Lens Material	Polystyrene (PS)	Dimmable	Yes (0-10 V)
Dimensions (inch/mm)	23.7 x 23.7 x 0.4 (in) 600 x 600 x 10 (mm)	Out Voltage (VDC)	25-42 V
Weight (kg/lbs)	3.0 kg / 6.6 lbs	Power Factor	≥0.9
Installation Method	Recessed mount for T-bar ceilings Optional Methods: Aircraft Cables or Surface-Mount Kit (Not included)	THD	18.49%
Operation Range (°F/°C)	-4°F to 122°F/-20°C to 50°C	Surge Protection	L-N: 1 kV L/N-GND: 2 kV
Warranty	10 Years	Inrush Current (A)	30
APPROVALS AND LISTINGS		Driver Class	Class 2
DLC Premium	PLIFKH5M6J1X		
Damp Location Rated	Yes		
UL/ETL	cETL UL-1598 CAN/CSA-C22.2 No. 250.0		
CANDELA		ILLUMINANCE AT A DISTANCE	

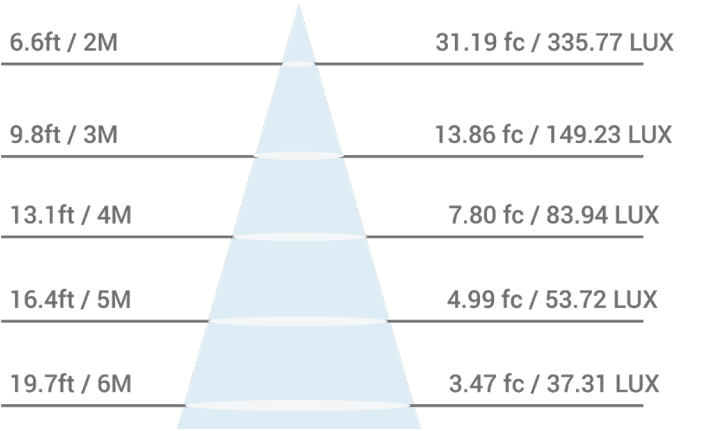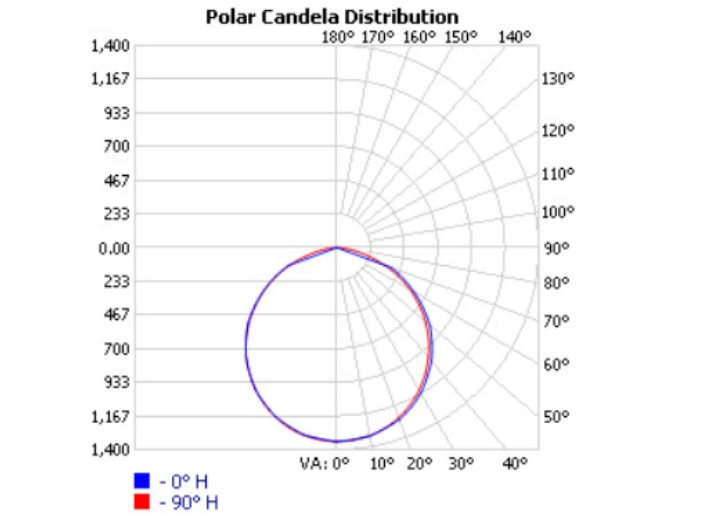

OPTIONAL ACCESORIES	
AC-22	Aircraft Cables for Flat Panels
SMK-22	Surface Mount Kit for Flat Panels