



### Tools Required

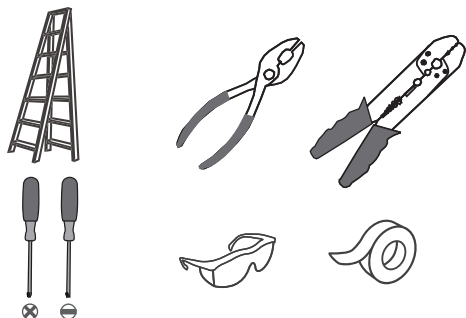

### Light Source

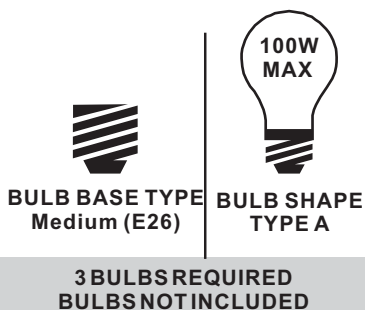

### Fixture Height Adjustable 22.25" to 57.5"

#### ⚠ Warnings and Cautions

Turn off the electricity at the circuit breaker before installation. Consult a licensed electrician if in doubt about installation.

Turn off power to the fixture and allow the bulbs to cool before replacing.

### Package Contents

**Preparation:** Identify and inspect all parts before beginning the installation.

Missing or damaged parts? Contact your original place of purchase.

#### PARTS BAG




A Crossbar Assembly x 1



B Outlet Box Screw x 2




C Wire Connector x 3




D Ceiling Canopy x 1




E 6" L Rod x 2



F 12" L Rod x 2



G Fixture Body x 1




H Shade x 3



I Socket Collar x 3


### Table of Contents

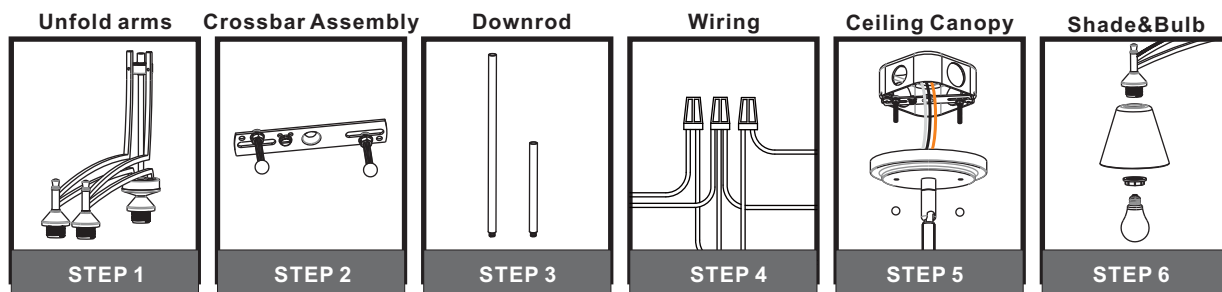

## STEP 1


1

Unfold support arms

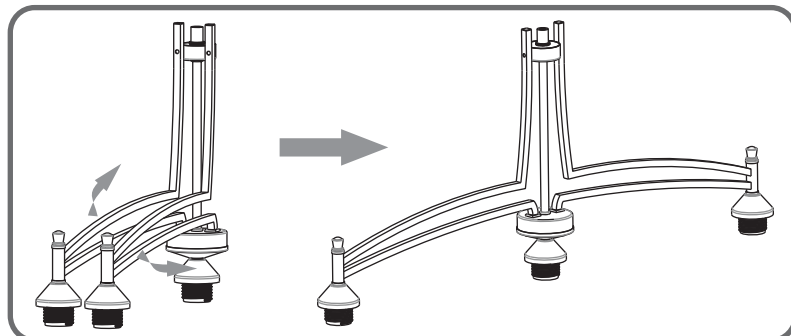

2


Install lock screws

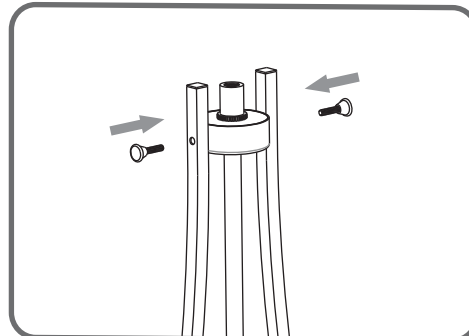

## STEP 2


1

**Step 1**  
**Install crossbar assembly**

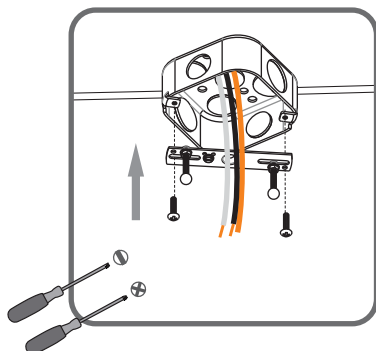


2

**Step 2 - 3**  
**Test fitting ceiling canopy to mounting screws**



3

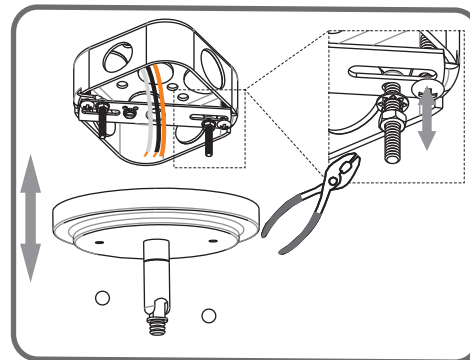

## STEP 3

### Optional Rods

**8' ceiling:**

(1) 12"L rod

**9' ceiling:**


(2) 6"L + (1) 12"L rod

**10' ceiling:**


(2) 6"L + (2) 12"L rods




1

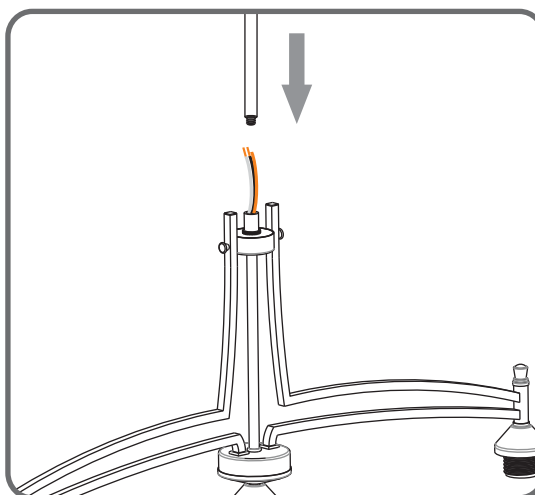


2

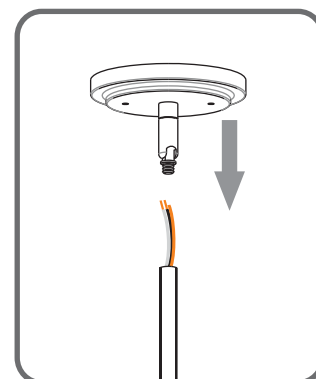

## STEP 4

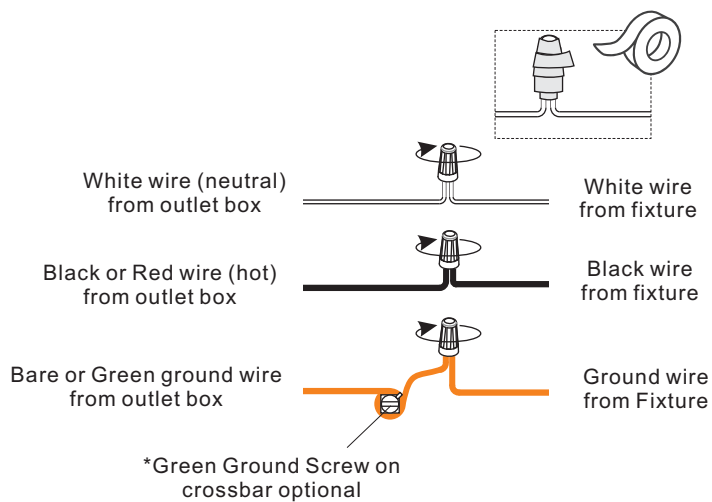

## STEP 5

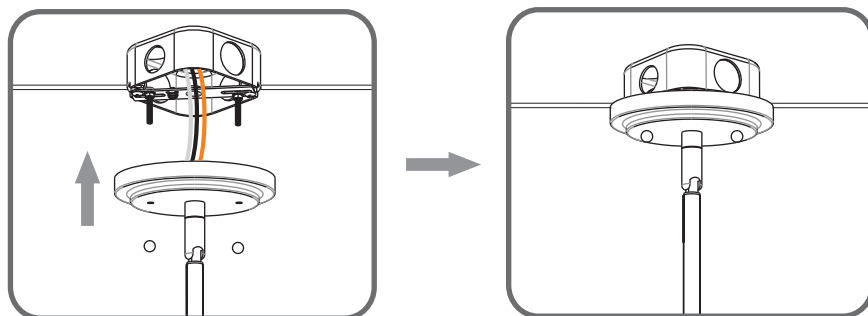

## STEP 6

