



Tools Required

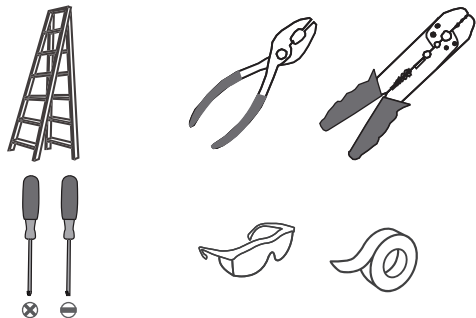

Light Source

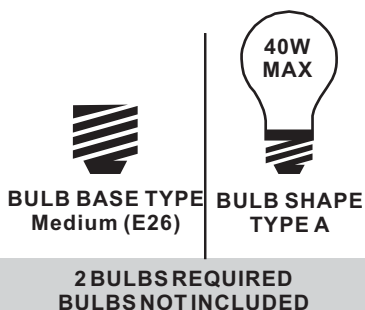

Warnings and Cautions

Turn off the electricity at the circuit breaker before installation. Consult a licensed electrician if in doubt about installation.


Turn off power to the fixture and allow the bulbs to cool before replacing.

Package Contents

Preparation: Identify and inspect all parts before beginning the installation.

Missing or damaged parts? Contact your original place of purchase.

PARTS BAG

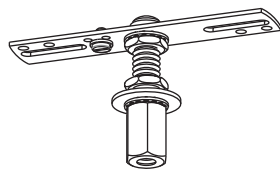

A Crossbar Assembly
x 1



B Outlet Box Screw
x 2



C Wire Connector
x 3



D Lock Washer
x 1




E Stem with
Hex Nut
x 1




F Hex Nut
x 1



G Finial
x 1

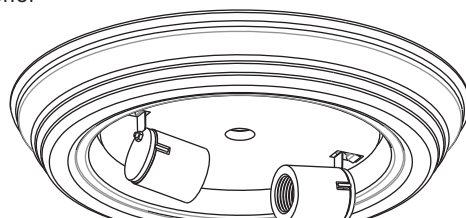

H Ceiling Canopy
x 1

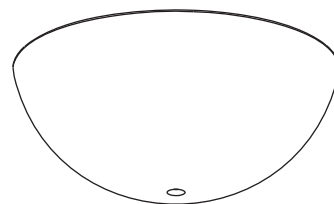

I Shade
x 1


Table of Contents

Crossbar Assembly	Wiring	Ceiling Canopy	Stem with Hex Nut	Bulb	Shade
STEP 1	STEP 2	STEP 3	STEP 4	STEP 5	STEP 6

STEP 1


1

Step 1
Install crossbar assembly

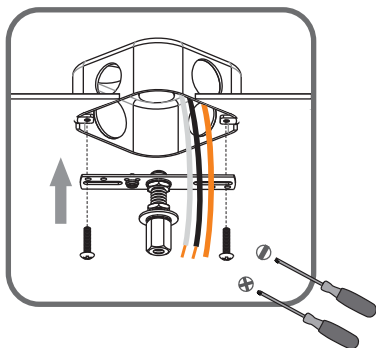


2


Step 2 - 3
Test fitting ceiling canopy to nipple




3

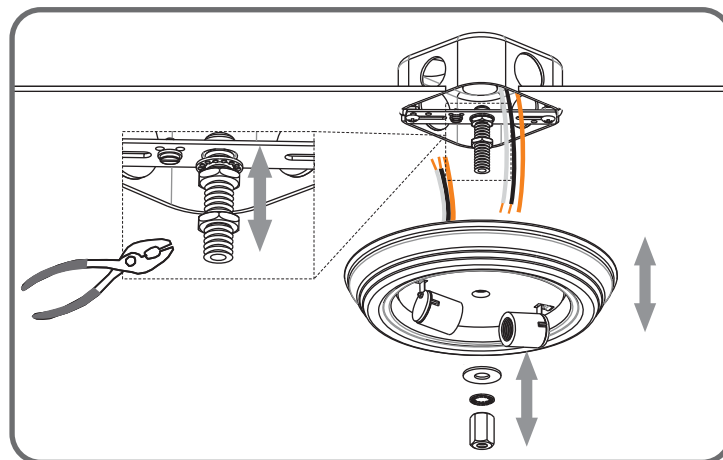



STEP 2

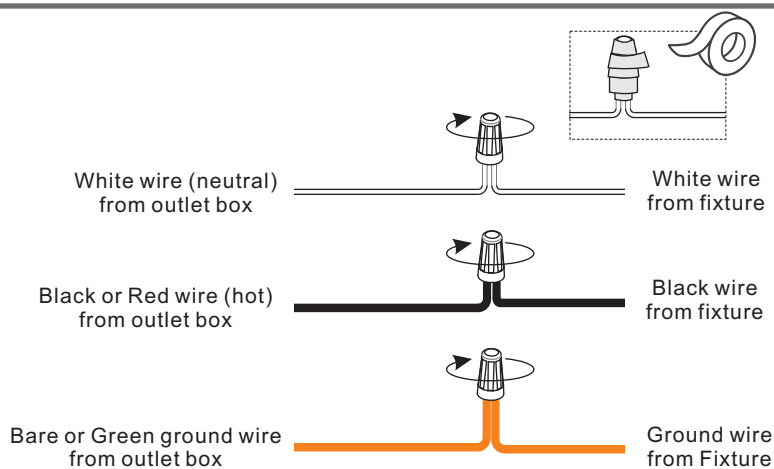



STEP 3

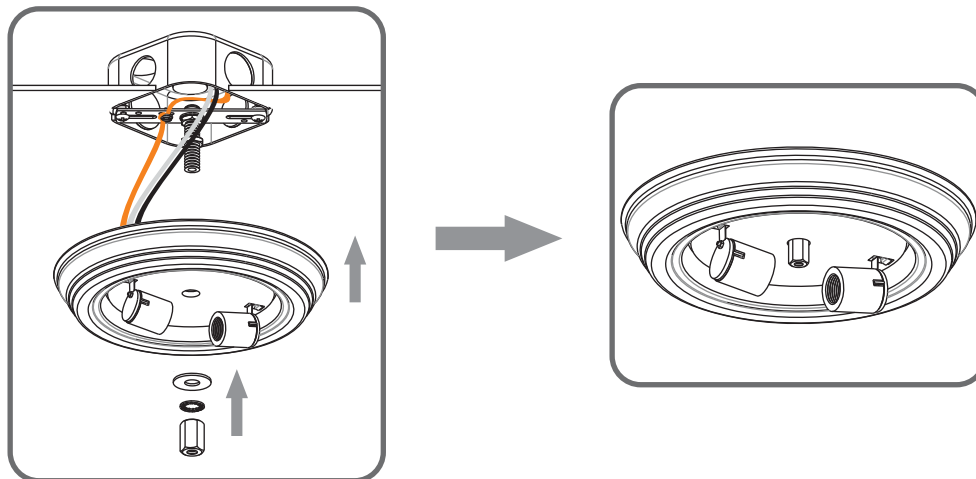

STEP 4

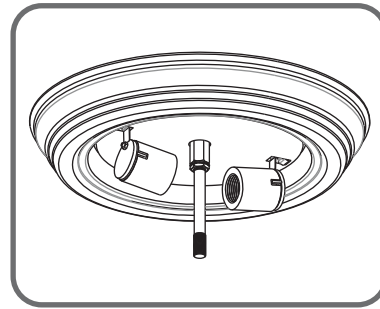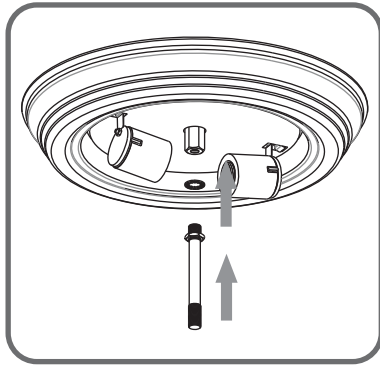

STEP 5

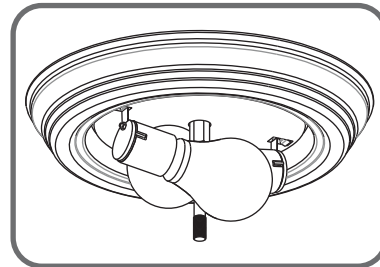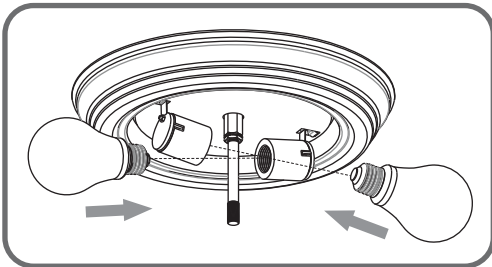

STEP 6

