

Date:

Type:

Project Name:

Part Number:

OPS SERIES

LED SECURITY WALL PACK



APPLICATIONS

- Commercial Building
- Exterior Parking
- School & Hospital

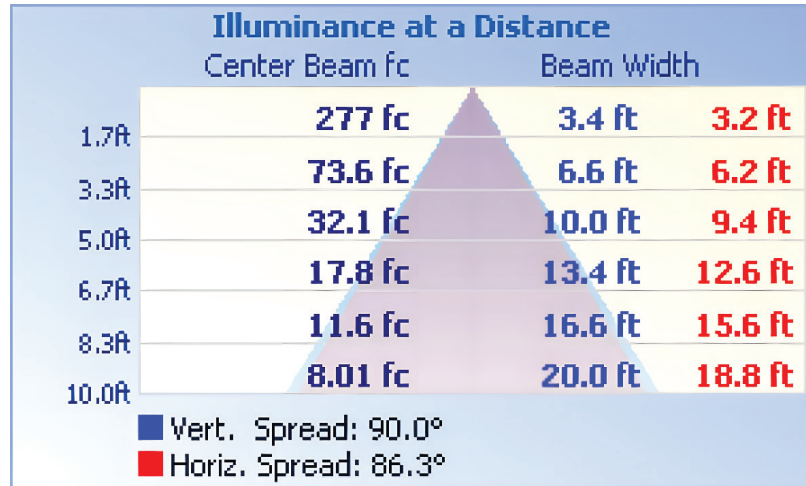


FEATURES

- DLC Listed
- Dual Voltage 120-277V
- High and stable lumen output
- 40°F to 104°F (-40°C to 40°C) operating temperature
- Elegant and Efficient design
- Integrated type photocell
- 50,000 hours lifespan
- 5-year Warranty
- Custom colours available
- Selectable Wattage & CCT
- IP66 Rated

SPECIFICATION

ORDER #	MODEL#	WATTS	VOLTS	BEAM ANGLE	INITIAL LUMENS	HOUR RATING	CCT
R51014	RENO-WP-25W-MW-MCCT-SEN	16/20/25W	120-277V	90°	2600	50,000	3500K/4000/5000K

LUMINOUS EMITTANCE

DIMENSION
