


Project Name

Location

Prepared By

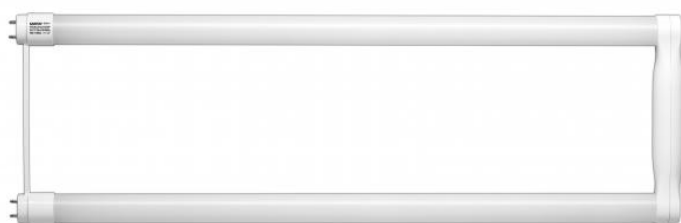

SATCO S9931

15T8U6/LED/22.5-835/BP

Notes

General

Status	Active
Watts	15
Volts	120V-277V
Ballast Type	Type B
Shape	T8
Base	Medium Bi Pin
ANSI Base	G13
Nominal Length	22.5
Finish	Frosted
CCT (Kelvin)	3500
Temperature	Neutral White
CRI	82
Lumens	1700
Beam Spread	220
Dimmable	Non-Dimmable
Hours Rated	50000
Lamp Type	U-Bend
Technology	LED

Electrical

Ballasting Requirements	Ballast Bypass
Operating Frequency	50/60 Hz
Dimmable Down To	N/A
Dimming Type	N/A
Power Factor	0.9
Operating Temperature	-20C (-4F) to a maximum of +45C (+113F)

Physical

MOL	22.5
MOD	1
Leg Spacing	6

Additional Information

Warranty	5 Year Limited - T8 LED Bulbs - Ballast Bypass
----------	--

Compliance

Safety Listing	cULus Classified
Location Rating	Damp
Energy Star	No
DLC Approved	Yes
DLC ID	P5DE5AYV
CEC Status	Lawful for sale in California
RoHS Compliant	Yes
NSF Approved	Yes - Approved

