

Date		Project	
Type		Part Number	




ALL-IN-ONE PERFORMANCE LIGHTING

SOL Series

Square Slim Surface Fixture

The SOL series Slim Surface Square is one of the most popular fixtures sought after in the commercial property market: a modern, round flush mount fixture that replaces 2 or 3-lamp incandescent ceiling fixtures. This 1" low profile fixture is easy to install and gives a clean, finished look to any room.

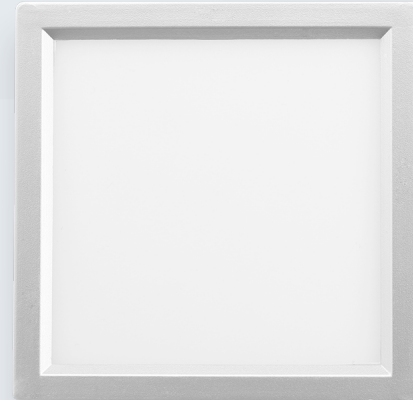

PRODUCT FEATURES

- Edge-lit technology, no glare or dark spots, instant-on
- This 1" thick luminaire is easy to install on standard J-boxes with a quick snap
- Die-cast aluminum with white translucent acrylic lens
- IC-rated and Air-Tight ready and may be in direct contact with insulation
- Suitable for Wet Locations
- Flicker-free 120V forward-phase triac dimming down to 10%
- Operating temperature: -22°F to +122°F (-30°C to +50°C)
- Rated Lifespan: L70 ~100,000 hrs
- 10 year limited warranty

KEY SPECIFICATIONS

Voltage	120V
Sizes	5", 7", 9", & 12"
Wattage	10W, 15W, 18W, 22W
Lumens	Up to 1,450 lm
CCT	27/30/35/40/5000K
Power Factor	>0.9
CRI	>80
Beam Angle	120°
Dimming	120V forward-phase TRIAC Dimming
Mounting	Surface
Applications	Commercial, Residential, Retail Facilities


 EMERGENCY
 BACKUP READY

SPECIFICATIONS - 5" SLIM SURFACE

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT	Finish
R31110	RENO-S5R-MCCT-10W-WH-SQ	10W	120V	600 lm	60 lm/W	2700/3000 3500/ 4000/5000K	White

SPECIFICATIONS - 7" SLIM SURFACE

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT	Finish
R31111	RENO-S7R-MCCT-15W-WH-SQ	15W	120V	900 lm	60 lm/W	2700/3000 3500/ 4000/5000K	White

SPECIFICATIONS - 9" SLIM SURFACE

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT	Finish
R31112	RENO-S9R-MCCT-18W-WH-SQ	18W	120V	1,150 lm	64 lm/W	2700/3000 3500/ 4000/5000K	White

SPECIFICATIONS - 12" SLIM SURFACE

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT	Finish
R31113	RENO-S12R-MCCT-22W-WH-SQ	22W	120V	1,450 lm	66 lm/W	2700/3000 3500/ 4000/5000K	White

ACCESSORIES – TRIM



R31181
 RENO-S5RT-BK-SQ
 5" Black Square Trim



R31182
 RENO-S5RT-BN-SQ
 5" Brushed Nickel Square Trim



R31183
 RENO-S7RT-BK-SQ
 7" Black Square Trim



R31184
 RENO-S7RT-BN-SQ
 7" Brushed Nickel Square Trim



R31185
 RENO-S9RT-BK-SQ
 9" Black Square Trim



R31186
 RENO-S9RT-BN-SQ
 9" Brushed Nickel Square Trim



R31187
 RENO-S12RT-BK-SQ
 12" Black Square Trim




R31188
 RENO-S12RT-BN-SQ
 12" Brushed Nickel Square Trim

Order#	Model	Description
R31151	RENO-S5RT-BK-SQ	Black Trim for 5" Slim Surface Fixture
R31152	RENO-S5RT-BN-SQ	Brushed Nickel Trim for 5" Slim Surface Fixture
R31153	RENO-S7RT-BK-SQ	Black Trim for 7" Slim Surface Fixture
R31154	RENO-S7RT-BN-SQ	Brushed Nickel Trim for 7" Slim Surface Fixture
R31155	RENO-S9RT-BK-SQ	Black Trim for 9" Slim Surface Fixture
R31156	RENO-S9RT-BN-SQ	Brushed Nickel Trim for 9" Slim Surface Fixture
R31157	RENO-S12RT-BK-SQ	Black Trim for 12" Slim Surface Fixture
R31158	RENO-S12RT-BN-SQ	Brushed Nickel Trim for 12" Slim Surface Fixture

ACCESSORIES – MOUNTING



R31159
 RENO-RC4
 4" Recessed Can Retrofit Kit



R31160
 RENO-RC6
 6" Recessed Can Retrofit Kit

Order#	Model	Description
R31159	RENO-RC4	4" Recessed Can Retrofit (E26 ADAPTOR + MOUNTING BRACKET, components for New Construction & Remodeling)
R31160	RENO-RC6	6" Recessed Can Retrofit (E26 ADAPTOR + MOUNTING BRACKET, components for New Construction & Remodeling)


ACCESSORIES – EMERGENCY DRIVER



R83000
 RENO-EM-H08
 Emergency LED Driver (100-347V AC, 50-60Hz, 12W)

Order#	Model	Description
R83000	RENO-EM-H08	External Mount Emergency Driver, 12W Output, ≥90 Minutes Operating Time


DIMENSIONS

5"



Width: 4.38" (111 mm)

Length: 4.38" (111 mm)

Height: 0.63" (16 mm)




Weight: 1 lbs (0.45 kg)

7"



Width: 6.38" (161 mm)

Length: 6.38" (161 mm)

Height: 0.63" (16 mm)




Weight: 1 lbs (0.45 kg)

9"


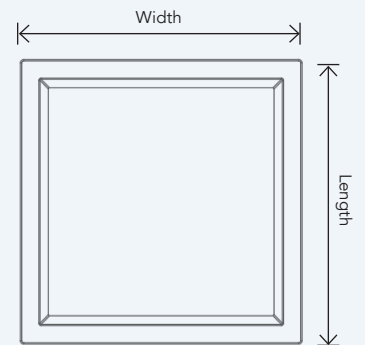
Width: 9" (228 mm)

Length: 9" (228 mm)

Height: 0.63" (16 mm)




Weight: 1.2 lbs (0.54 kg)

12"


Width: 12" (306 mm)

Length: 12" (306 mm)

Height: 1" (25 mm)



Weight: 1.5 lbs (0.68 kg)