

LED FIXTURE

RIGID Series

LED Centre Basket RGD-CB2

Recessed commercial grade lay-in luminaire, clean contemporary low glare design
Multiple Wattage - Multiple Kelvin



Features & Benefits

120-347V LED auto-sensing driver

Multiple Wattage and Multiple Kelvin (CCT)

PMMA lens offers clean look low glare

Range of sizes (1'x4', 2'x2', 2'x4' available)

High quality metal construction in white powder coat finish

cUL listed

L70 @ 100,000 Hrs

0-10V Dimmable

High CRI (80+)

Damp location rated, Type IC

Warranty

5-year limited warranty in commercial use from the date of purchase


Operating temperature range between -20°C and +50°C

Applications

Commercial/ Industrial/ Retail location

For use in Offices, Stores, Schools, Medical building where ever quality light is required.

Dimensional drawing

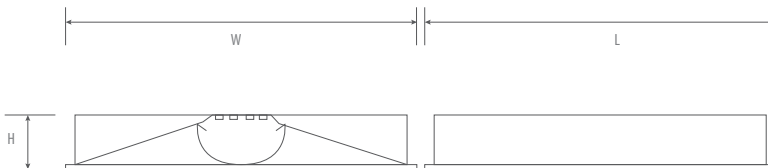

	L	W	H
2'x2'	23 3/4"	23 3/4"	2 3/4"
2'x4'	47 3/4"	23 3/4"	2 3/4"
1'x4'	47 3/4"	11 3/4"	2 3/4"

Ordering Information

Example: RGD-CB2/22/MW/MK/120-347/D

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Dimmable
RGD (Rigid)	CB2 (Backlit Panel)	22 (2'x2') 14 (1'x4') 24 (2'x4')	40W-36W-30W (2'x2') 40W-36W-30W (1'x4') 45W-40W-36W (2'x4')	35-40-50K	120 -347V	D (0-10V Dim)

Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Dimension (inch)	Case QTY.
3664303	RGD-CB2/14/MW/MK/120-347V/D	30-25-20W	120-347V	50,000	3750-3125-2500	35K-40K-50K	>80	11 3/4" x 47 3/4"	1
3664304	RGD-CB2/22/MW/MK/120-347V/D	30-25-20W	120-347V	50,000	3750-3125-2500	35K-40K-50K	>80	23 3/4" x 23 3/4"	1
3664305	RGD-CB2/24/MW/MK/120-347V/D	45-38-34W	120-347V	50,000	5625-4750-4250	35K-40K-50K	>80	23 3/4" x 47 3/4"	1