



## Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

## Features & Benefits

- Replaces MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Universal burn position
- Easy installation
- Reduced maintenance costs

## Applications

- Post top
- Wall pack
- Area Lighting
- Flood lighting
- Garage lighting
- General illumination

## Notes

- The use of an external surge protection device is recommended.
- Operating temp. range between -40°F and 113°F (-40°C and 45°C).
- Suitable for use in open and enclosed luminaires.
- Suitable for use in dry and damp environments.
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.
- Lamps have clear polycarbonate cover lenses

## Warranty

For warranty information refer to: <https://www.venturelighting.com/resources/warranties>



## Product Performance

|                                    |                                                |
|------------------------------------|------------------------------------------------|
| Input Power (W)                    | 24                                             |
| Initial Lumens                     | 3350                                           |
| Lumens/Watt                        | 140                                            |
| Correlated Color Temperature (CCT) | 4000K                                          |
| Color Rendering Index (CRI)        | 80                                             |
| Life Hours                         | 50000                                          |
| Minimum Lamp Compartment Size      | 13.39" x 7.87" x 7.87" (340mm x 200mm x 200mm) |
| Dimming                            | No                                             |
| Operating Temperature Range        | -40°F to 113°F (-40°C to 45°C)                 |

## Physical Characteristics

|                  |                    |
|------------------|--------------------|
| Base Type        | Medium, (E26)      |
| Overall Length A | 7.52" (191mm)      |
| Diameter B       | 2.56" (65mm)       |
| Weight           | 0.75 lbs (0.34 kg) |

## Electrical Characteristics

|                     |                    |
|---------------------|--------------------|
| Input Voltage Range | 100V-277V; 50/60Hz |
| Power Factor        | >0.90              |
| THD                 | <20%               |

## Regulatory Qualifications


cULus Listed (UL 1993/CSA C22.2 No. 1993)

cULus Classified (UL 1598C/CSA C22.2 No. 250.1)

## Accessories

SP12714 – 120-277V Surge Protector

# Venture 24W LED Retrofit Lamp

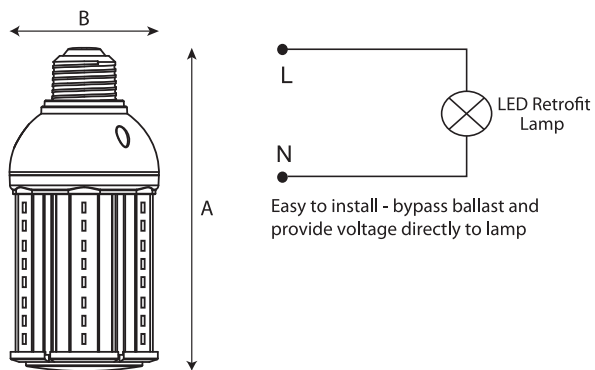

(800) 451-2606  
Fax: (800) 451-2605  
7905 Cochran Rd, Suite 300  
Glenwillow, Ohio 44139  
E-mail: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)  
[VentureLighting.com](http://VentureLighting.com)

