



# 72W Recessed LED Canopy Fixture, 5000K

Order Code: CP36619



## Description

The Venture Lighting LED Recessed Canopy series of luminaires are low profile, lightweight, and designed for long life and low maintenance. The fixtures are designed to allow for easy replacement of existing recessed lighting fixtures. The robust design paired with universal mounting makes them ideal for locations, such as retail canopies and drive-thrus, where heavy pedestrian or automotive traffic makes maintenance difficult.

## Construction

The housing unit is constructed from heavy-duty aluminum. Fixtures are finished with a durable white polyester powder coating. To ensure weather-tight protection, each optical assembly is sealed with a silicone gasket. Each unit is ETLcertified to withstand wet locations for use in covered canopies, not open air canopies. Luminaires are rated for an ambient operating temperature range of -40°C to 40°C.

## Optics

High-performance, UV stabilized acrylic optics are used to achieve precise photometric distributions.

## Electrical

The Class II power supply has a range of 120-277V, 50/60 Hz. The high performance LEDs are rated up to 190,000 hours at 25°C ambient temperature. 0-10V dimming capability is standard.

## Mounting

The fixture is NON-IC Rated and is designed for recessed mounting. IT IS THE CUSTOMER'S RESPONSIBILITY TO VERIFY THE AVAILABILITY OF ADEQUATE SPACE FOR INSTALLATION.

DLC Model# CPC-03C-80NDA-xxAC01

## Product Performance

|                                         |                                |
|-----------------------------------------|--------------------------------|
| Wattage                                 | 72W                            |
| Lumen Output                            | 9000                           |
| Correlated Color Temperature (CCT)      | 5000K                          |
| Color Rendering Index (CRI)             | 70+                            |
| Lumen Maintenance @50,000 hours*        | 97%                            |
| Calculated L70 @ 25°C Ambient in Hours* | >500,000                       |
| Replaces HID Wattage                    | 250W                           |
| Operating Temperature Range             | -40°F to 104°F (-40°C to 40°C) |

## Physical Characteristics

|               |         |
|---------------|---------|
| Fixture Color | White   |
| Weight        | 6.8 lbs |
| Width         | 16.0"   |
| Length        | 16.0"   |
| Height        | 2.4"    |

## Electrical Characteristics

|                                  |                                     |
|----------------------------------|-------------------------------------|
| Amperage Draw (Input Volts/Amps) | 120/0.61 208/0.36 240/0.31 277/0.27 |
| Surge Protection                 | 10kA                                |

## Regulatory Qualifications

cETLus Listed

DLC Qualified - Model# CPC-03C-80NDA-xxAC01

Rated for wet locations

## Accessories

SP12714 – 120-277V Surge Protector


## NOTE:

\*Lumen maintenance data is based on LED testing per IESNA LM-80-08 and projected per IESNA TM-21-11




VENTURE  
LIGHTING

# Venture 72W Recessed LED Canopy Fixture, 5000K

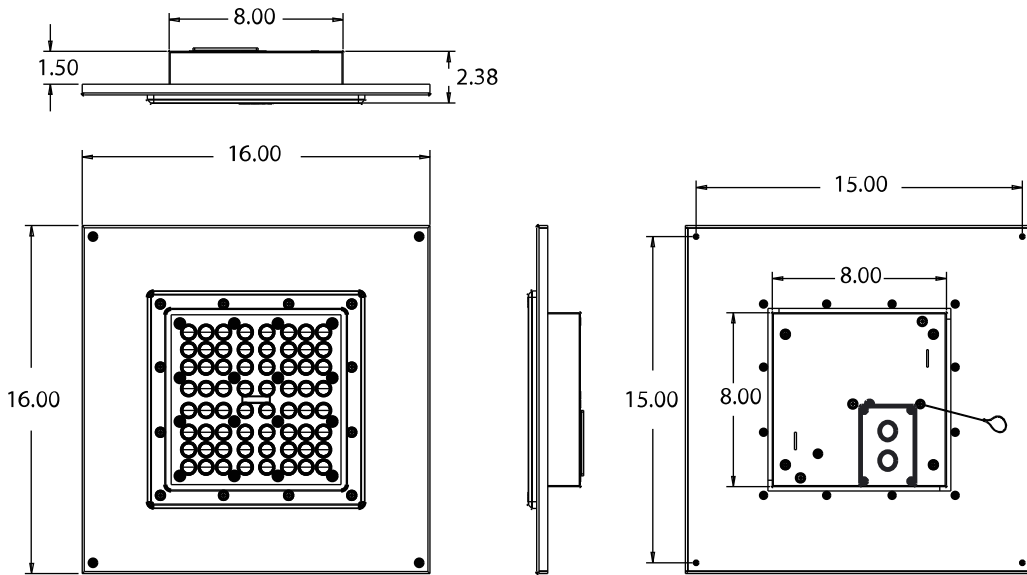

Luminous Intensity Distribution Diagram

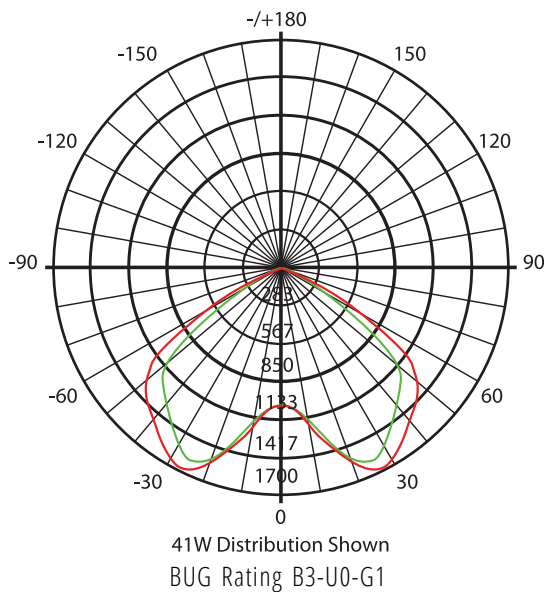

(800) 451-2606  
Fax: (800) 451-2605  
2451 Enterprise Parkway East  
Twinsburg, Ohio 44087 USA  
E-mail: [venture@adlt.com](mailto:venture@adlt.com)  
[VentureLighting.com](http://VentureLighting.com)

