




44W LED Panel - Color Selectable

Order Code: PN41751

CCT Selectable: 3500K / 4000K / 5000K

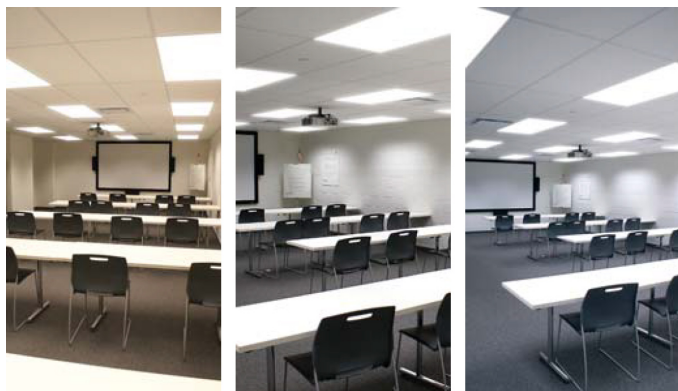

3500K

4000K

5000K

Description

Venture Lighting's color temperature selectable LED panels are low profile, lightweight, and designed for long life and low maintenance. These thin luminaires are designed to quickly and easily upgrade existing fluorescent fixtures and be more versatile than other LED panels. The high performance LED source is mounted to ensure proper thermal management of the system. Each fixture is capable of changing CCT with a simple flip of a switch. The CCT Selection method allows for a cost effective method to reduce stocking inventory by 66%.

- Change from 3500K, 4000K or 5000K with just the flip of a switch.
- All CCT Selectable Panel fixtures are preset to 4000K at the factory.

Construction

The high performance LED source is mounted to ensure proper thermal management of the system. The design allows for a cooler running LED chip which leads to longer lifetime, better efficacy, and color consistency.

Optics

Each fixture utilizes a specially engineered optic which is designed to have low glare yet maximize the product performance.

Electrical

The power supply has a range of 120-277V, 50/60 Hz. Driver input voltage terminal block can use 12 to 22 wire gauge. Driver output voltage terminal block can use 16 to 22 wire gauge. 0-10V DC dimming capability is standard.

Mounting

The fixture is designed for replacing fluorescent fixtures in T-grid applications. Fixtures are IC-rated and rated for damp and dry locations.

Product Performance

Wattage	44W		
	CCT	DLC Model#	Lumen Output
Standard	4000K	P124-48N-ANR-C	4740
Field Selectable	3500K	P124-48B-ANR-C	4660
Field Selectable	5000K	P124-48C-ANR-C	5030
Color Rendering Index (CRI)	80+		
Life Hours	50,000		
Operating Temperature Range	-13°F to 113°F (-25°C to 45°C)		

Physical Characteristics

Fixture Color	White
Weight	11.0 lbs
Width	23.7"
Length	47.7"
Height	1.9"
Panel Size	2x4

Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120/0.42 208/0.25 240/0.22 277/0.19
----------------------------------	-------------------------------------

Regulatory Qualifications

cULus Listed
DLC Model# (4000K) P124-48N-ANR-C
DLC Model# (3500K) P124-48B-ANR-C
DLC Model# (5000K) P124-48C-ANR-C
IC-Rated


Accessories

KT18522 2X4 SURFACE MOUNT KIT, WHITE
KT18916 2X4 DRYWALL MOUNT KIT, WHITE
BB23468 BATTERY BACK-UP




Venture 44W LED Panel - Color Selectable


44W 2x4 LED Panel

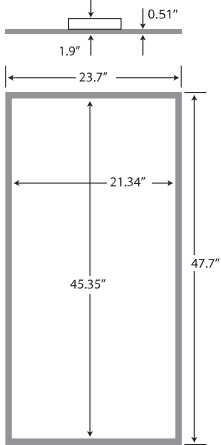


Switch Position:
LED Output OFF




Switch Position:
3500K CCT



Switch Position:
4000K CCT



Switch Position:
5000K CCT



(800) 451-2606
Fax: (800) 451-2605
2451 Enterprise Parkway East
Twinsburg, Ohio 44087 USA
E-mail: venture@adlt.com
VentureLighting.com

