


Project :  
Type :  
Drawn by :  
Catalogue No. :  
Date :

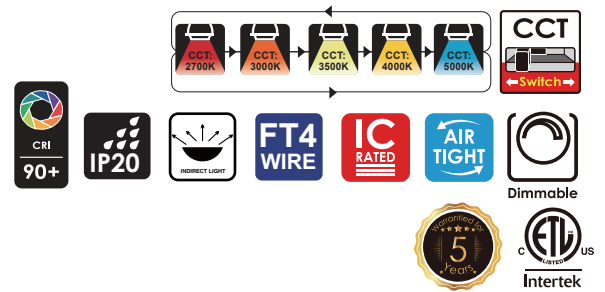

## Specifications


| Model No.              |                            | □ VO-INDRP4W12-120-D-5WAY       |
|------------------------|----------------------------|---------------------------------|
| General                | Watts                      | 12W                             |
|                        | HID Equivalent             | 40W                             |
|                        | Lumen                      | 700L                            |
|                        | CCT                        | 2700K/3000K/3500K/4000K/5000K   |
|                        | Volts                      | 120V                            |
|                        | CRI                        | >90                             |
|                        | Beam Angel                 | 130°                            |
|                        | Hours Rated                | 50000 hours                     |
|                        | Min Compartment Size       | Ø4 3/4 " x 1 3/8 "              |
| Electrical             | Operating Frequency        | 50-60Hz                         |
|                        | Power Factor               | >0.9                            |
|                        | Operating Position         | Both Horizontal&Vertical        |
|                        | Surge Protection           | Built-in surge protection-2.5KV |
|                        | Operating Temperature      | -20°C /-4°F to 40°C/104°F       |
| Physical               | Housing Color              | White                           |
|                        | Weight (Kg)                | 0.44                            |
| Additional Information | Additional Info            | 5 way CCT                       |
|                        | Rated For Enclosed Fixture | Yes                             |
|                        | Warranty                   | 5 years                         |
| Compliance             | Safety Listing             | CETLus-Listed                   |
|                        | Location Rating            | Damp                            |
|                        | Energy Star                | No                              |
|                        | DLC Approved               | No                              |
|                        | DLC ID                     | No                              |

## Features & Specifications



|                  |                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction     | <ul style="list-style-type: none"> <li>• Construction: One-piece die cast aluminum trim and heat sink construction</li> <li>• Multiple LED array for uniform illumination</li> <li>• Its hidden light source bounces off the interior dome to emit a diffused soft functional light</li> <li>• CCT switches are placed discretely inside the driver housing</li> </ul>             |
|                  | <ul style="list-style-type: none"> <li>• Easy installation for remodel or new construction applications<br/>With 2700K/3000K/3500K/4000K/5000K 5CCT selectable</li> </ul>                                                                                                                                                                                                          |
| Mounting         |                                                                                                                                                                                                                                                                                                                                                                                    |
| Performance Data | <ul style="list-style-type: none"> <li>• Available in 2700k/3000k/3500k/4000k/5000k selectable color temperature</li> <li>• 90+ CRI</li> <li>• Electrical ratings: 120v</li> <li>• Estimated life of over 100 000 hours to L70</li> <li>• ELV&amp;TRIACDimming</li> <li>• 2.5kV surge protection (standard)</li> <li>• Operating temperature: -20°C /-4°F to 40°C/104°F</li> </ul> |
|                  |                                                                                                                                                                                                                                                                                                                                                                                    |
| Compliances      | <ul style="list-style-type: none"> <li>• ETL certified for damp locations</li> <li>• IP20</li> </ul>                                                                                                                                                                                                                                                                               |

## Dimensions & Weights

| Model No.        | VO-INDRP4W12-120-D-5WAY |
|------------------|-------------------------|
| Diameter in.(cm) | 4 3/4 in (12)           |
| Height in. (cm)  | 1 3/8 in (3.5)          |
| Net weight (lbs) | 0.65                    |

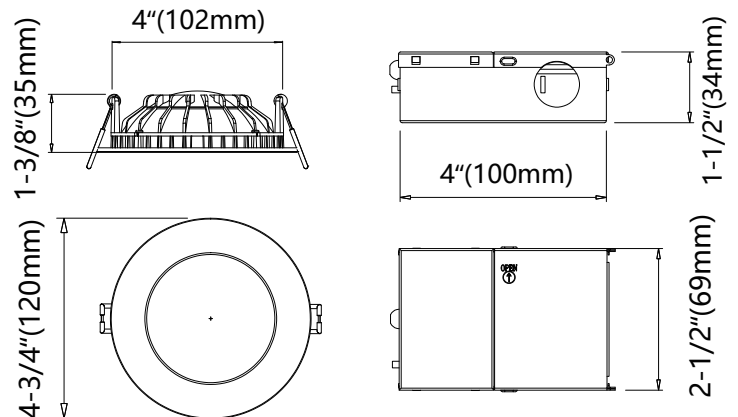

### Product Details

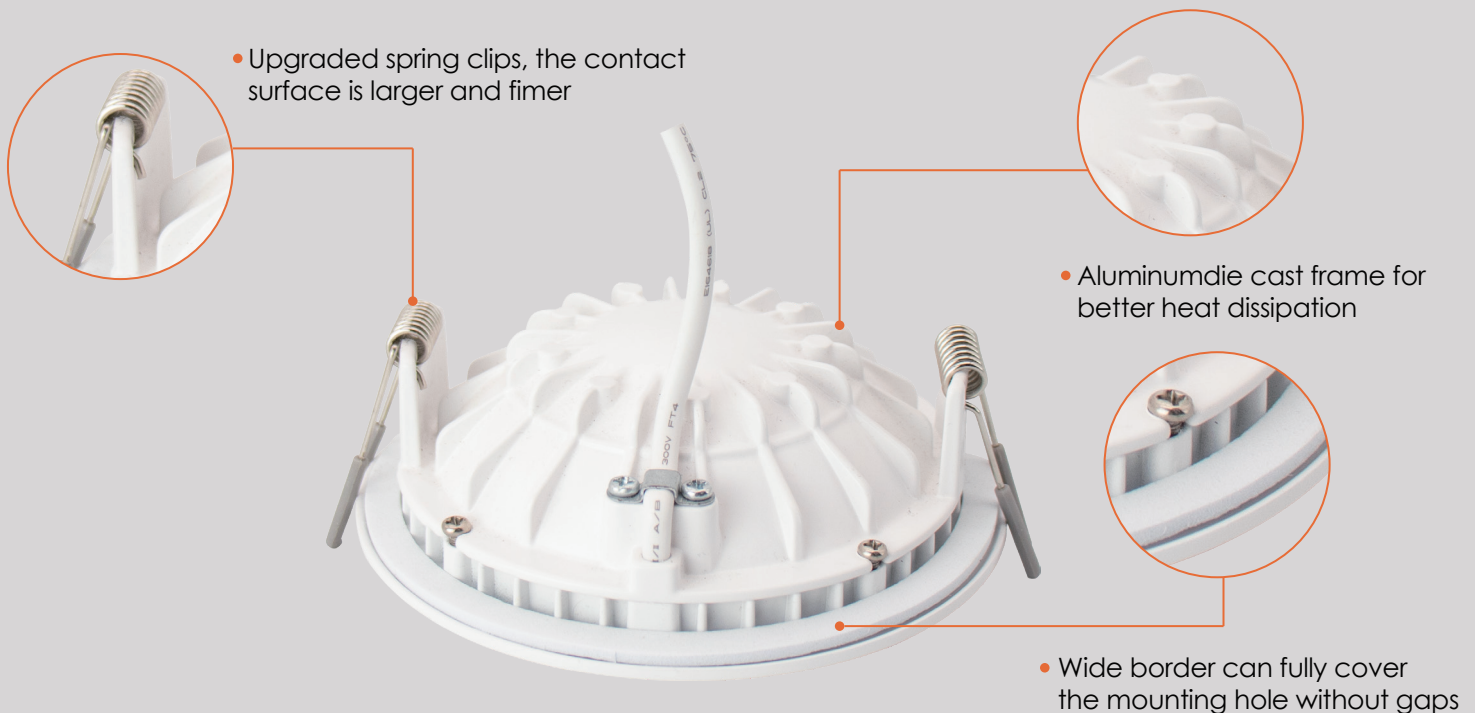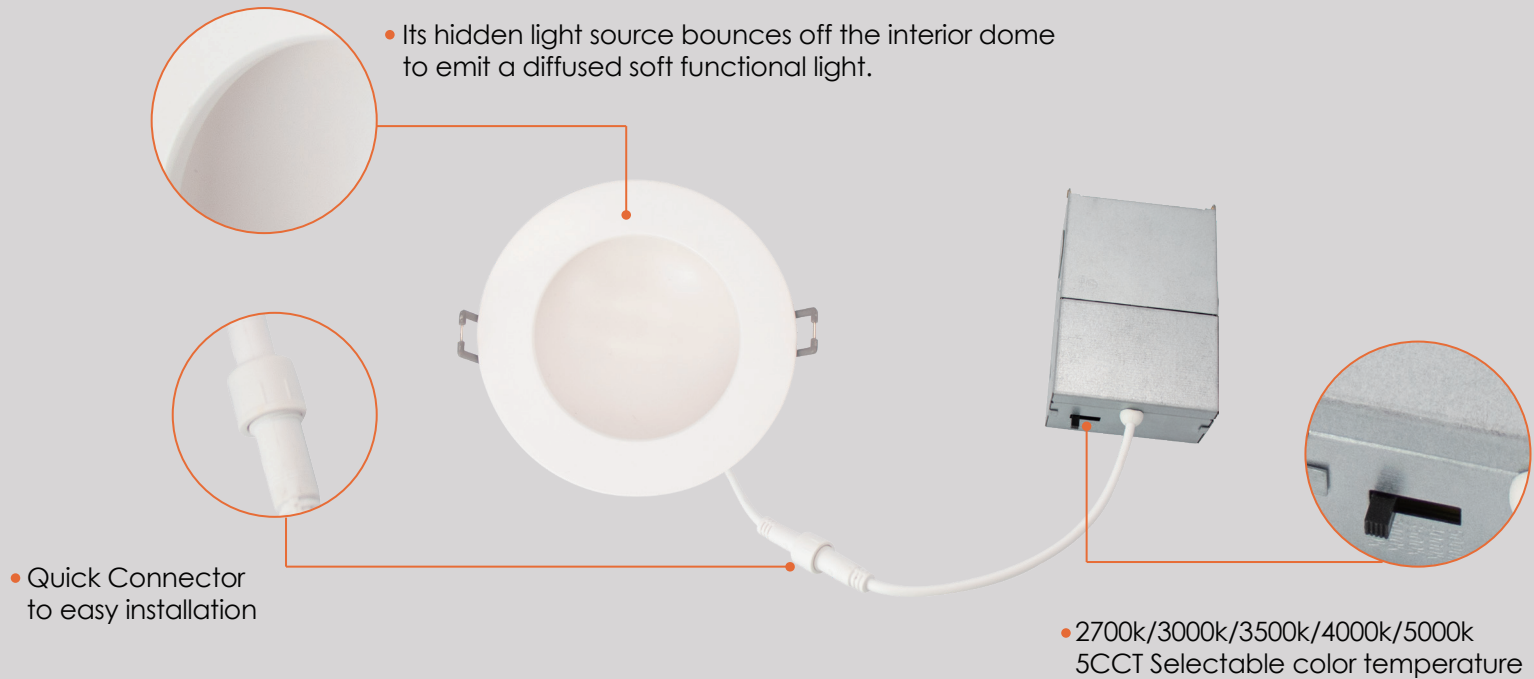

## Compatible Dimmers

| BRAND   | SERIES     | MODEL             |
|---------|------------|-------------------|
| LUTRON  | SKYLARK    | S-600             |
| LUTRON  | /          | 153P              |
| LEVITON | SURESLIDE  | 6633-P            |
| LUTRON  | RadioRA 2  | RRD-10ND          |
| LUTRON  | Diva       | DVCL-153P         |
| LUTRON  | Ariadni    | AY-600P           |
| LUTRON  | SKYLARK    | CTCL-153P         |
| LEGRAND | /          | LS603PWV          |
| LUTRON  | TOGGLER    | TGCL-153P         |
| LUTRON  | SKYLARK    | S-600P            |
| LUTRON  | SKYLARK    | S-603PG           |
| LUTRON  | Lumea      | LGCL-153PL        |
| LUTRON  | Lumea      | LG-603P           |
| LUTRON  | Rotany     | D-600P            |
| LEVITON | Decora     | 6631-L            |
| LEVITON | Decora     | 6681              |
| LEVITON | SURESLIDE  | 6613-P            |
| LEVITON | ILLUMATECH | IPI06-1LZ         |
| LUTRON  | /          | D-600PH-DK        |
| LEVITON | Vizia      | VPE06             |
| LUTRON  | Maestro    | MAEL-153M         |
| LUTRON  | SKYLARK    | CTELV-303P        |
| LUTRON  | Diva       | DVELV-300P        |
| LUTRON  | Diva       | DV-600P           |
| LUTRON  | SKYLARK    | SELV-300P         |
| LEVITON | Decora     | 6674              |
| LUTRON  | SKYLARK    | SCL-153P          |
| LUTRON  | Nova       | NLV-600           |
| LUTRON  | RadioRA 2  | RRD-6NA-WH        |
| LUTRON  | Diva       | MAELV-600-WH      |
| LEVITON | Decora     | 6672              |
| LUTRON  | /          | PD-6WCL-WH Caseta |
| LUTRON  | Diva       | DVLV-600P         |
| LEGRAND | /          | RHCL453P          |
| LEGRAND | /          | RH703P            |
| LEGRAND | /          | ADPD703H          |

Dimming range : 10%-100%

This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance.

Read and comply to the dimmer installation instructions. Some dimmers may require more than one product for stable operation.

recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

## Lumen Details

| Model No.:              | Watts (W) | 2700K             |                   | 3000K             |                   | 3500K             |                   | 4000K             |                   | 5000K             |                   |
|-------------------------|-----------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|                         |           | Lumen Output (LM) | Efficiency (LM/W) | Lumen Output (LM) | Efficiency (LM/W) | Lumen Output (LM) | Efficiency (LM/W) | Lumen Output (LM) | Efficiency (LM/W) | Lumen Output (LM) | Efficiency (LM/W) |
| VO-INDRP4W12-120-D-5WAY | 12W       | 686LM             | 54                | 768LM             | 63                | 805LM             | 69                | 812LM             | 68                | 759LM             | 60                |

