

EXITA SERIES

EMERGENCY LIGHTING
EXITA-5024



The EXITA-5024 is the Metal Running Man Sign Combo exit light from ERALUX. This exit light comes standard for mounting either on ceiling, wall or even for side installations. It also comes standard with three pictograms that be can changed in the field to offer versatility to the installation process. The housing provides a rigid, lightweight and durable sign.

Project: _____
Qty: _____
Notes: _____

OPERATING & ELECTRICAL

Input Voltage

120/347Vac

Power factor

0.9

PERFORMANCE

CCT

6500K

Power consumption

2.0W

Emergency Power

2.0W

MECHANICAL & HOUSING

Housing

Steel Frame

Finish

White

Power Supply

Factory wired

electronic LED driver

APPLICATION CONDITION

Ambient temperature range

0 to 40°C

COMPATIBLE MOUNTING

Mounting

Surface, Wall, Ceiling or

End mounting

WARRANTY

System warranty

2 years

Recommended Battery replacement

2 years

Lumen maintenance



Rated for 85% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES). (L85 at 50,000 hours)

APPROVALS

UL Certified to C22.2 #141-15

DIMENSIONS

Unit:mm
[in]

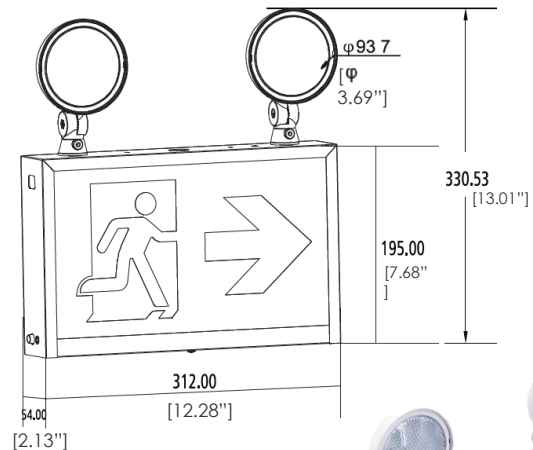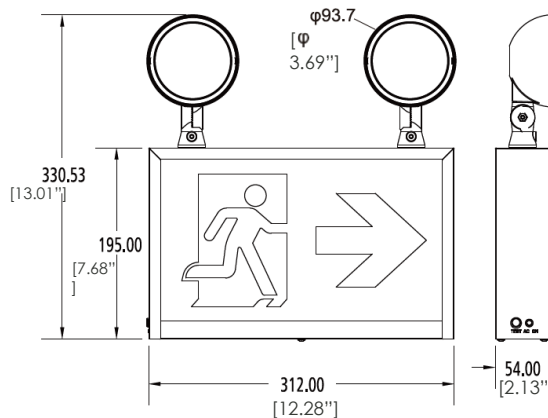

ORDERING GUIDE

EXAMPLE: BY-F5024CA

BY-F5024CA
FIXTURE FAMILY
BY-F5024CA ERALUX emergency exit sign



OVERVIEW



Input: AC120/347V/60Hz
Input Power: 2W
Emergency Power: 2W
CCT: 6500K
 Overcharge/Over-discharge protection

Emergency Duration: ≥ 1.5 Hours
Charge Time: ≤ 24 Hours
 High performance, Ni-Cad Battery Test Switch
 Combo Adjustable Heads

Housing Material: Steel Frame
Universal Mounting: Ceiling, wall, end mount
 Suitable for Damp location

CONFIGURATIONS

Single or Double Face
 Comes standard with 3 pictograms:



French Version for
Quebec Market



ERALUX Inc.
 1-514-447-7598 | 1-630-534-2589
www.eralux.com