

Description: 12V, 75W Constant Voltage LED Driver with 0-10V dimming. Universal input range of 100-277VAC. One 12V independent, constant voltage output channel.

This Driver Will Operate The Following LED Modules:


LED module designed to accept constant voltage input of 12V and has a maximum input current of 6.25A.

Note: Constant voltage modules are usually with on-board circuit besides LEDs, the module & driver compatibility check is preferred before any installation. Some of the modules with big input capacitance may lead to the incompatibility with the dimmable driver, contact Fulham for further assistance.

ELECTRICAL DATA


Input Voltage	100-277VAC, 50/60Hz
Input Current	0.91A@100V, 0.32A@277V
Input Power	89W
Power Factor	>0.9
THD	<20%
Driver Type	Constant Voltage
Output Voltage	12VDC
Output Current Range	0-6.25A
Output Wattage	75W
Number of Output Channels	1
Dimming	0-10V
RFI/EMI	FCC PART 15B CONSUMER, EN55015
Output Type	NON-CLASS 2
Ambient Operating Temperature Range	-20°C to 51°C
Max Case Temperature at Tc	89°C
Sound Rating	A
Protections	Input Surge Protection
	Input Current Protection
	Output Short Circuit Protection
	Output Open Circuit Protection
	Output To Ground Short Protection
Expected Service Life	Overload Protection
	5 YEARS
Approvals / Class	cURus NON-Class 2, IP64, CE, RoHS, Dry or Damp Locations, Type TL/HL

MECHANICAL DATA

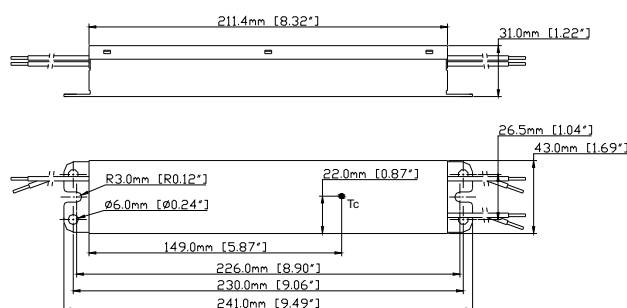

WIRING DIAGRAMS

INPUT SIDE	LENGTH	OUTPUT SIDE	LENGTH
WHITE	300mm [11.8"]	RED	300mm [11.8"]
BLACK	300mm [11.8"]	BLUE	300mm [11.8"]
		GREY	300mm [11.8"]
		PURPLE	300mm [11.8"]

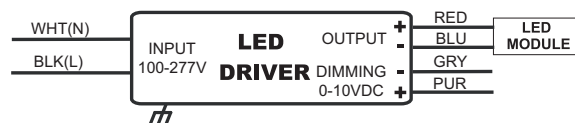

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.