


NS-4857

4" Square Trim with Regressed Reflector

Source: 50W max.
PAR20

PRODUCT IMAGES AND DIMENSIONS

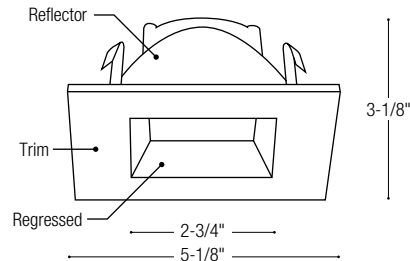

CONSTRUCTION

Trim: 4" die-cast aluminum flange provides sharp clean corners. Non-reflective painted finishes and square trim.

Mounting: Trim includes three trim clips that securely mount trim in housing.

COMPATIBLE LAMP / HOUSINGS

Line Voltage:

10W PAR20 max. (NSIC-401QAT/10; NS-401QAT/10; NSR-404QAT/10)

50W PAR20 max. (NFBIC-4INCAT; NSIC-401QAT; NS-401QAT; NSR-404QAT; NSRIC-404QAT)

LISTING

cULus Listed for damp locations when used with compatible housing



Compatible Housings

Item Number / Description / Max. Wattage

LINE VOLTAGE

NFBIC-4INCAT = IC Air-Tight Fire Box / 50W

NSIC-401QAT = IC Air-Tight New Construction / 50W

NSIC-401QAT/10 = IC Air-Tight New Construction / 10W

NS-401QAT = Non-IC Air-Tight New Construction / 50W

NS-401QAT/10 = Non-IC Air-Tight New Construction / 10W

NSR-404QAT = Non-IC Air-Tight Remodel / 50W

NSR-404QAT/10 = Non-IC Air-Tight Remodel / 10W

NSRIC-404QAT = IC Air-Tight Remodel / 50W

4" Square Trim with Regressed Reflector - Housing Required

Series	Finish
NS-4857 = 4" Square Trim with Regressed Reflector	BB = Black Reflector / Black Regressed / Black Trim BBW = Black Reflector / Black Regressed / White Trim BWW = Black Reflector / White Regressed / White Trim BZBZ = Bronze Reflector / Bronze Regressed / Bronze Trim HZHZW = Haze Reflector / Haze Regressed / Haze Trim NN = Natural Metal Reflector / Natural Metal Regressed / Natural Metal Trim WW = White Reflector / White Regressed / White Trim

Example: **NS-4857BWW** = 4" Square White Trim with Black Reflector and White Regressed