



Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

Features & Benefits

- Energy Saving Replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Universal burn position
- Easy installation
- Reduced maintenance costs

Applications

- Post top
- Wall pack
- Area Lighting
- Flood lighting
- Garage lighting
- General illumination

Notes

- The use of an external surge protection device is recommended.
- Operating temp. range between -40°F and 113°F (-40°C and 45°C).
- Suitable for use in open and enclosed luminaires.
- Suitable for use in dry and damp environments.
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.
- Lamps have clear polycarbonate cover lenses

Warranty

For warranty information refer to:

<https://www.venturelighting.com/resources/warranties>



Product Performance

Input Power (W)	36
Initial Lumens	5150
Lumens/Watt (Bare Lamp)	142
Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	80
Life Hours	50000
Dimming	No
Operating Temperature Range	-40°F to 113°F (-40°C to 45°C)

Physical Characteristics

Base Type	Mogul, (EX39)
Overall Length A	8.43" (214mm)
Diameter B	3.35" (85mm)
Minimum Compartment Size	14.96" x 7.87" x 7.87" (380mm x 200mm x 200mm)
Weight	1.23 lbs (0.56 kg)

Electrical Characteristics

Input Voltage Range	100V-277V; 50/60Hz
Power Factor	≥0.90
THD	≤20%

Regulatory Qualifications

cULus Listed (UL 1993/CSA 22.2 No. 1993)


cULus Classified (UL 1598C/CSA C22.2 No. 250.1)

DLC® Qualified

Accessories

SP12714 – 120-277V Surge Protector

Venture 36W LED Retrofit Lamp

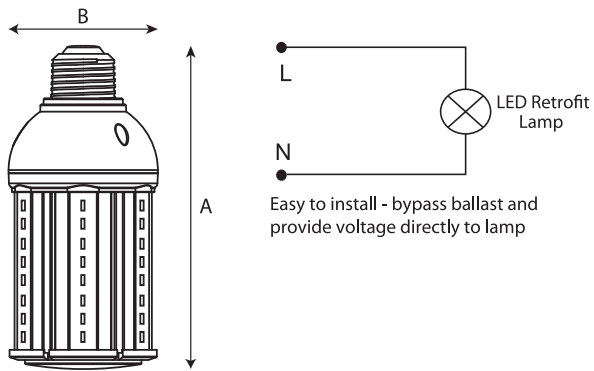

(800) 451-2606
Fax: (800) 451-2605
7905 Cochran Rd, Suite 300
Glenwillow, Ohio 44139
E-mail: Venture_Lighting@VentureLighting.com
VentureLighting.com

