



Kellems® Wire Management Products

Low Tension Pulling Grips

Flexible Eye, Single Weave, Galvanized Steel

WARNING!

It is important that you read all breaking strength, safety and technical data relating to this product on pages T-17 through T-27.

Light Duty Pulling Grips are made of galvanized steel in a single weave construction. They feature a flexible eye for easy attachment to a pulling line.

Junior Pulling Grips feature a strong galvanized steel, single weave mesh. A flexible eye easily attaches to a pulling line, snake or fish tape.


Junior Grip Kit

Junior Grip Kit contains 6 grips, one of each size. Catalog number 033051114.



Note: Refer to page T-27 for building wire selection chart.

Note: Refer to page T-26 for multiple cables in a single pulling grip.

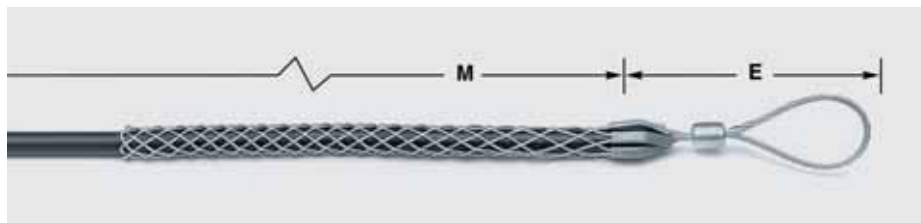


Light Duty Grips

Cable Diameter Range Inches (cm.)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Numbers
Short				
.50"-.61" (1.27-1.55)	2,800 (12,454)	5" (12.70)	11" (27.94)	03303001
.62"-.74" (1.57-1.88)	2,800 (12,454)	5" (12.70)	11" (27.94)	03303002
.75"-.99" (1.90-2.51)	4,000 (17,792)	6" (15.24)	12" (30.48)	03303003
1.00"-1.24" (2.54-3.15)	5,300 (23,574)	7" (17.78)	13" (33.02)	03303004
1.25"-1.49" (3.17-3.78)	5,300 (23,574)	7" (17.78)	14" (35.56)	03303005
1.50"-1.74" (3.81-4.42)	6,800 (30,246)	8" (20.32)	15" (38.10)	03303006
1.75"-1.99" (4.44-5.05)	8,500 (37,808)	9" (22.86)	17" (43.18)	03303007
2.00"-2.49" (5.08-6.32)	8,500 (37,808)	9" (22.86)	18" (45.72)	03303008

Standard

.50"-.61" (1.27-1.55)	2,800 (12,454)	5" (12.70)	16" (40.64)	03303010
.62"-.74" (1.57-1.88)	2,800 (12,454)	5" (12.70)	16" (40.64)	03303011
.75"-.99" (1.90-2.51)	4,000 (17,792)	6" (15.24)	20" (50.80)	03303012
1.00"-1.24" (2.54-3.15)	6,800 (30,246)	7" (17.78)	20" (50.80)	03303013
1.25"-1.49" (3.17-3.78)	6,800 (30,246)	7" (17.78)	21" (53.34)	03303015
1.50"-1.99" (3.81-5.05)	6,800 (30,246)	8" (20.32)	23" (58.42)	03303016
2.00"-2.49" (5.08-6.32)	8,500 (37,808)	9" (22.86)	25" (63.50)	03303017
2.50"-2.99" (6.35-7.59)	10,600 (47,149)	9" (22.86)	27" (68.58)	03303018
3.00"-3.49" (7.62-8.86)	14,700 (65,386)	10" (25.40)	30" (76.20)	03303019
3.50"-3.99" (8.89-10.13)	14,700 (65,386)	10" (25.40)	32" (81.28)	03303029

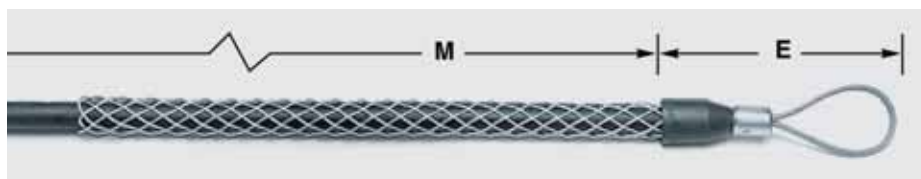

Junior Pulling Grips

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Model	Catalog Numbers
.19"-.24" (.48-.61)	400 (1,779)	3¼" (8.25)	4¼" (10.79)	J19	03305011*
.25"-.36" (.63-.91)	450 (2,002)	3¼" (8.25)	4¼" (10.79)	J25	03305001
.37"-.49" (.94-1.24)	900 (4,003)	3¾" (9.52)	7" (17.78)	J37	03305002
.50"-.61" (1.27-1.55)	1,300 (5,782)	4¼" (10.79)	8½" (21.59)	J50	03305003
.62"-.74" (1.57-1.88)	1,950 (8,674)	5" (12.70)	10" (25.40)	J62	03305004
.75"-.99" (1.90-2.51)	2,800 (12,454)	5¾" (14.60)	10" (25.40)	J75	03305005
1.00"-1.24" (2.54-3.15)	3,900 (17,347)	6½" (16.51)	11½" (29.21)	J100	03305006

E-Eye length M-Mesh length at nominal diameter.

*Not included in Junior Grip Kit, 033051114.