

QUESTIONS OR CONCERNS CONTACT CANARM AT:
1-800-265-1833 (English) / 1-800-567-2513 (French)
Monday through Friday 8:00 AM to 5:00 PM E.S.T.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS
READ ALL INSTRUCTIONS

**IMPORTANT SAFETY
INSTRUCTIONS**
SAVE THESE INSTRUCTIONS

TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Wire Cutters



Wiring supplies
as required by
local electrical
code


SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
DO NOT REMOVE INSULATION FROM FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. CAUTION – RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
4. CONNECT THE GROUND WIRE (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL BOX.
5. TO CLEAN THE FIXTURE, TURN OFF THE POWER, WAIT FOR IT TO COOL, AND WIPE THE FIXTURE WITH A CLEAN, SOFT CLOTH.


NOTE: Product may not look exactly as shown in figures.

Note: Your fixture may have either one or two sockets depending on the model.


INSTALLATION:



1. Install nipple to mounting bracket and lock in place with hex nut. Nipple must be adjusted to clear the hole in the center of the fixture.




2. Attach mounting bracket to wiring box with wiring box screws, start ground screw into mounting bracket.

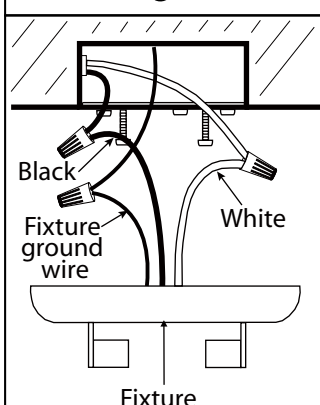


3. Connect the ground wire to the ground screw in the electrical box. Connect the black wire from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.


Note: Your fixture may have either one or two sockets depending on the model.




4. Install the pan through the centre screw stud. Secure the pan to the nipple tightening by star washer and hex nut.



5. Install proper bulb type and wattage (not included).



6. Line up the screws in the glass with the key slots in the pan. Push the screws and glass onto the pan and turn the glass to secure in place.



7. **Note:** You must lock the glass in place using the locking screw using the tool provided.